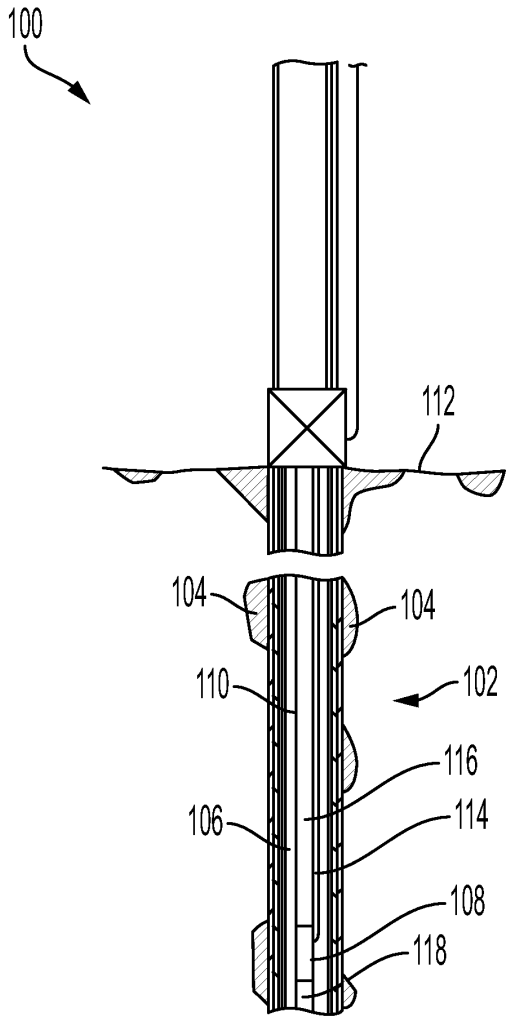


FIG. 1

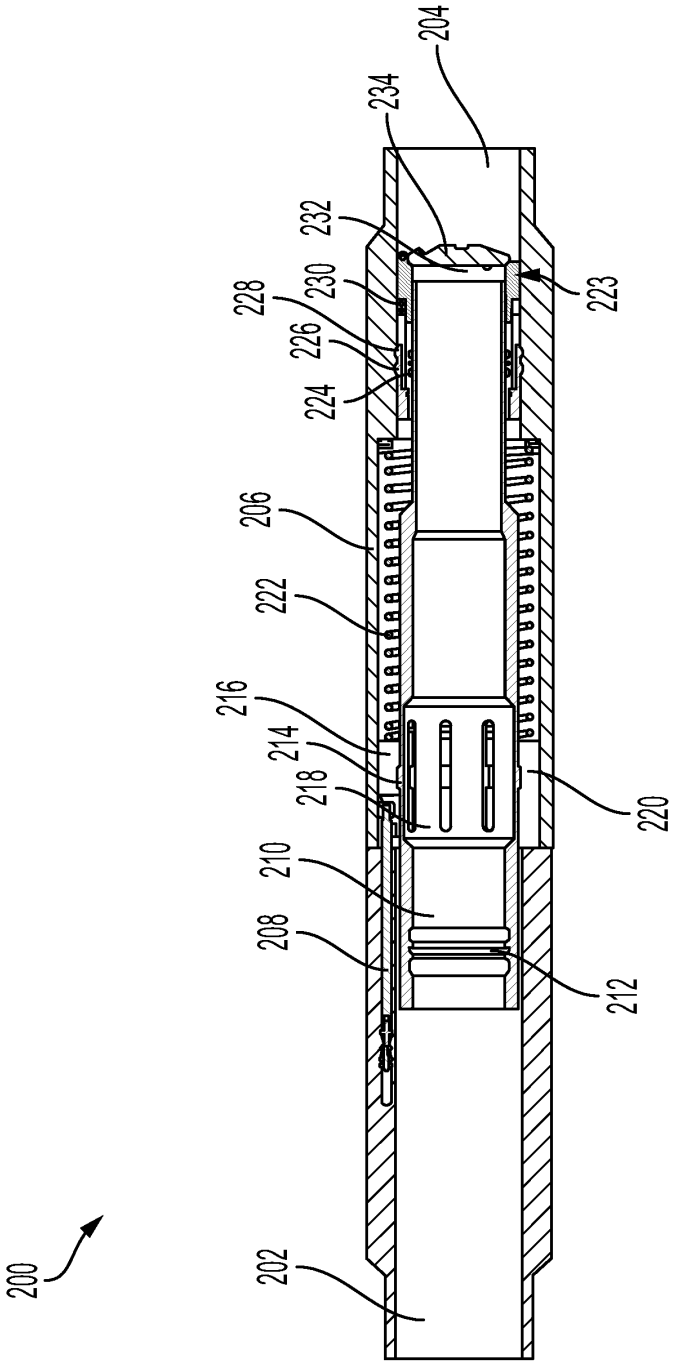

200
202
204
206
208
210
212
214
216
218
220
222
223
224
226
228
230
232
234

FIG. 2

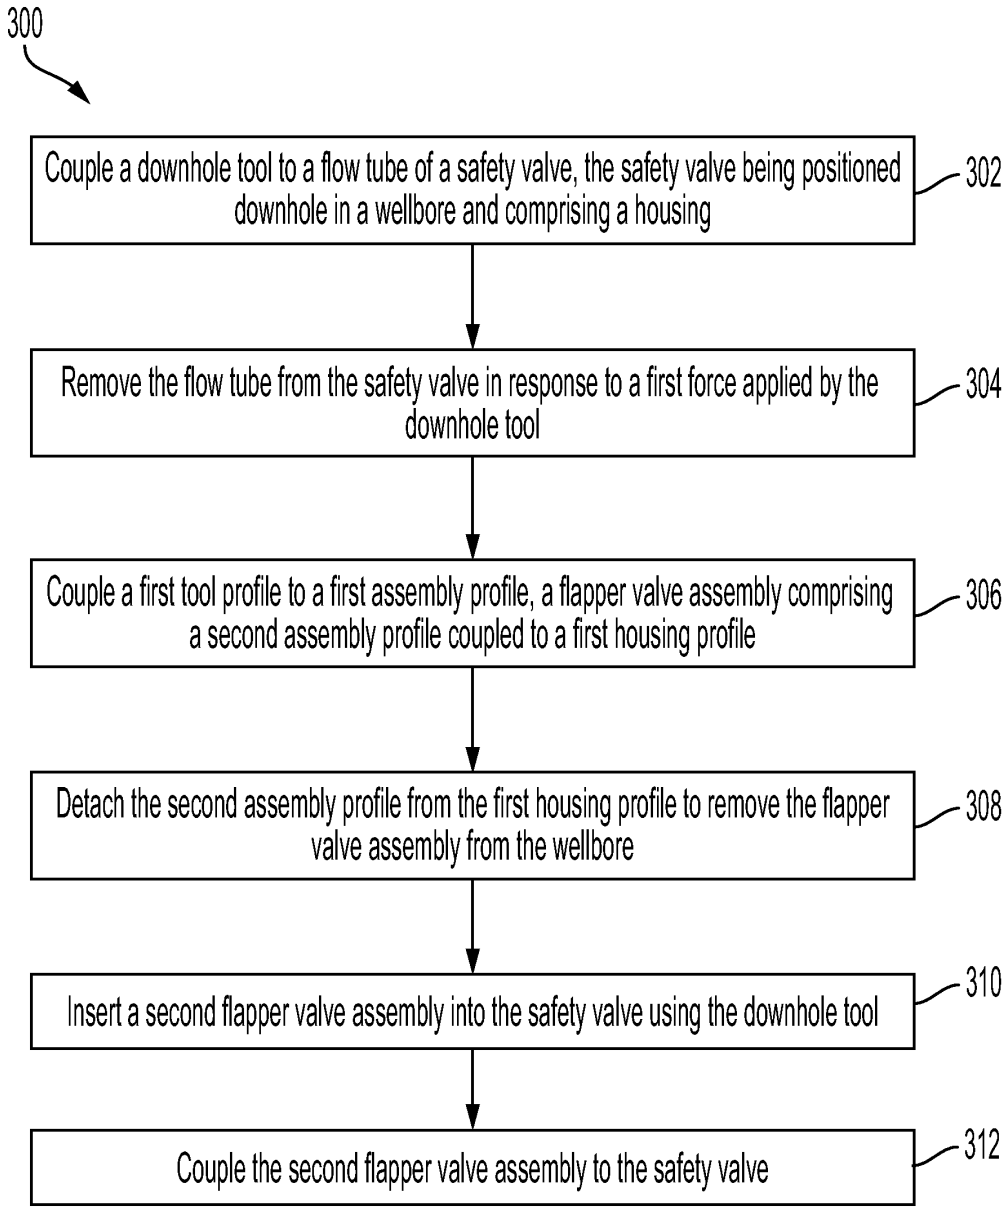

300
Couple a downhole tool to a flow tube of a safety valve, the safety valve being positioned downhole in a wellbore and comprising a housing
302
Remove the flow tube from the safety valve in response to a first force applied by the downhole tool
304
Couple a first tool profile to a first assembly profile, a flapper valve assembly comprising a second assembly profile coupled to a first housing profile
306
Detach the second assembly profile from the first housing profile to remove the flapper valve assembly from the wellbore
308
Insert a second flapper valve assembly into the safety valve using the downhole tool
310
Couple the second flapper valve assembly to the safety valve
312

FIG. 3