

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 September 2004 (10.09.2004)

PCT

(10) International Publication Number
WO 2004/077607 A3

(51) International Patent Classification⁷: **H01Q 13/28**,
21/00, 3/46, 13/08

(21) International Application Number:
PCT/US2004/003905

(22) International Filing Date: 9 February 2004 (09.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/373,936 25 February 2003 (25.02.2003) US

(71) Applicant (for all designated States except US):
RAYTHEON COMPANY [US/US]; 870 Winter Street,
Waltham, MA 02451-1449 (US).

(72) Inventors: **QUAN, Clifton**; 5521 No. Florinda Avenue,
Arcadia, CA 91006 (US). **LEE, Jar J.**; 32 Paso Robles,
Irvine, CA 92602 (US). **PIERCE, Brian M.**; 22501
Sheffield Drive, Moreno Valley, CA 92557 (US). **ALLI-
SON, Robert C.**; 6910 Larkvale Drive, Rancho Palos
Verdes, CA 90275 (US).


(74) Agents: **ALKOV, Leonard A.** et al.; c/o Raytheon Com-
pany, P.O. Box 902 (E4/N119), El Segundo, CA 90245-
0902 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: WIDEBAND 2-D ELECTRONICALLY SCANNED ARRAY WITH COMPACT CTS FEED AND MEMS PHASE SHIFTERS

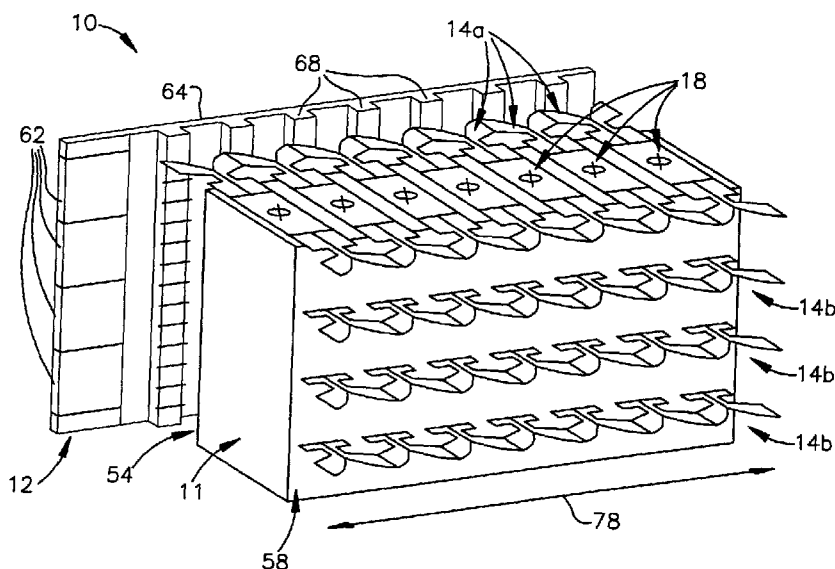

(57) Abstract: A microelectromechanical system (MEMS) steerable electronically scanned lens array (ESA) antenna and method of frequency scanning are disclosed. The MEMS ESA antenna includes a wide band feedthrough lens (11) and a continuous transverse stub (CTS) feed array (12). The wide band feedthrough lens (11) includes first and second arrays of wide band radiating elements (14) and an array of MEMS phase shifter modules (18) disposed between the first and second arrays of radiating elements (14). The continuous transverse stub (CTS) feed array (12) is disposed adjacent the first array of radiating elements (14) for providing a planar wave front in the near field. The MEMS phase shifter modules (18) steer a beam radiated from the CTS feed array (12) in two dimensions.

WO 2004/077607 A3



Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:

6 May 2005