

21/05/04
2004028775

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 June 2003 (12.06.2003)


PCT

(10) International Publication Number
WO 03/047385 A1

- (51) International Patent Classification⁷: **A45C 13/10**, B65D 83/04
- (21) International Application Number: PCT/US02/38700
- (22) International Filing Date: 2 December 2002 (02.12.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/334,409 30 November 2001 (30.11.2001) US
- (71) Applicant: **WEST PHARMACEUTICAL SERVICES, INC.** [US/US]; 101 Gordon Drive, Lionville, PA 19454 (US).
- (72) Inventor: **MAIETTA, Michael, G.**; Box 575, R.D. #2, Montgomery, PA 17752-9715 (US).
- (74) Agents: **BELISARIO, Martin, G.** et al.; Akin, Gump, Strauss, Hauer & Feld L.L.P., One Commerce Square, Suite 2200, 2005 Market Street, Philadelphia, PA 19103-7086 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CHILD-RESISTANT CONTAINER

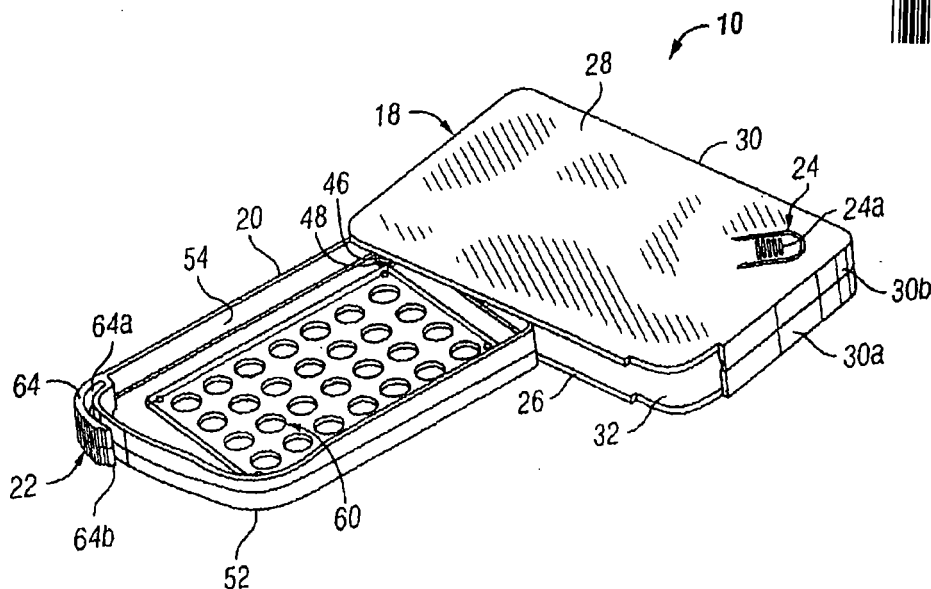

162162

(57) Abstract: A child-resistant container for holding an item includes a housing (30) and a tray (20) that is pivotably connected to the housing (30) for pivotable movement between a closed position and an open position. A latch (22) in the form of a flexible member is connected to the tray (20) and is biased to engage the housing (30) when the tray (20) is in the closed position. A lock assembly (24) is connected to the housing (30) and is engageable with the tray (20) when the tray (20) is in the closed position. In use, the tray (20) is secured in the closed position by the latch (22) and the lock (24) and is angularly displaceable from the closed position to the open position upon the simultaneous application of a first force to the latch (22), a second force to the lock (24) and a torque to the tray (20).

WO 03/047385 A1



ACTION

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.