



(51) International Patent Classification:
C08F 10/00 (2006.01) *C08F 2/00* (2006.01)

(21) International Application Number:
PCT/US2009/069140

(22) International Filing Date:
22 December 2009 (22.12.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/140,909 26 December 2008 (26.12.2008) US

(71) Applicant (for all designated States except US): **DOW GLOBAL TECHNOLOGIES, INC.** [US/US]; 2040 Dow Center, Midland, MI 48674 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **VAN EGMOND, Jan W.** [NL/US]; 1504 Virginia Street, Charleston, WV 25311 (US). **PAINTER, Roger, B.** [US/US]; 121 Barrington Drive, Scott Depot, WV 25560 (US). **KULIK, Zuzanna** [US/US]; 17 Pope Way, Charleston, WV 25309

(US). **WIELICZKO, Joel, D.** [US/US]; 346 Roxalana Hills Drive, Dunbar, WV 25064 (US).

(74) Agent: **BARTHEL, Ted, J.**; Whyte Hirschboeck Dudek S.c., 555 East Wells Street, Suite 1900, Milwaukee, WI 53202 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) Title: ANTIFOULANT FOR IMPACT COPOLYMERS AND METHOD

Figure 5

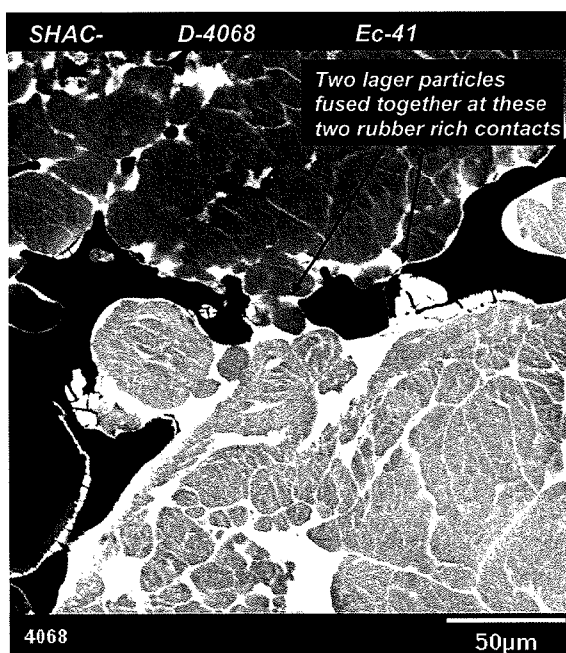

(57) Abstract: A process for producing a heterophasic copolymer is provided. The process includes introducing an antifoulant to a second polymerization reactor which operates in series with a first polymerization reactor. The antifoulant may be a multicomponent antifoulant and/or a coating agent. Provision of either antifoulant enables the production of a heterophasic copolymer with an Fc value from about 10% to about 50% by inhibiting reactor fouling during polymerization.



MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*