

RTMP's copy

The invention relates to a vibratile driver's seat to keep a driver alert and prevent a driver from dozing during driving.

A variety of apparatus have been proposed to keep a driver alert and prevent a driver of automobiles and the like, from dozing during driving. Such apparatus usually comprise a sensor for sensing that a driver has started to doze and means for wakening a driver by receiving a signal from the sensor. For example, there is a sensor which senses that a driver has started to doze by sensing the number of times the driver nods per unit time or the time for leaning one's head forward, and the like, because a driver nods when the driver starts to doze, and sends a signal to means for alerting the driver. Also, there are means for alerting a driver which operates by receiving the signal, and alerting the driver by producing a loud sound in the driver's ear or ears. Therefore, according to this apparatus, if a driver starts to doze, the sensor senses that the driver's head is leaning forward, and actuates the means for alerting or wakening the driver.

However, because the above mentioned apparatus operates only after a driver has started to doze off, the driver may lose

This Sheet Has Been Replaced



concentration, due to drowsiness, when the driver has started to doze, to such a degree that the means for alerting and wakening the driver may not be effective.

Accordingly, the present invention can provide apparatus for preventing a driver from dozing off by vibrating the seat.

The present invention provides a vibratile driver's seat and means for vibrating such driver's seat and means for controlling the on-off of such means for vibrating the driver's seat.

As a result of a series of studies of apparatus to effectively prevent dozing during driving, the inventors have discovered that it is too late to prevent accidents when a driver is waken through a sensor that senses a driver has started to doze. The inventor has discovered that, if a driver's seat is always being vibrated, the driver remains alert, does not doze off and, as a result, traffic accidents caused by dozing during driving can be completely prevented.

The invention will be more fully described and will be better understood from the following description, taken with the appended drawings, in which:



Fig. 1 is a side view of one embodiment of the present invention;

Fig. 2 is a top plan view of the apparatus of Fig. 1 with the driver's seat removed;

Fig. 3 is a side schematic view of an automobile incorporating the invention of Fig. 1;

Fig. 4 is a vertical sectional view of the vibrator of the one embodiment;

Fig. 5 is an enlarged view, partly in section, of the apparatus of Fig. 1;

Fig. 6 is a top view of the driver's seat and the control panel for control of the apparatus of Fig. 1;

Fig. 7 is a rear view of the apparatus of Fig. 6;

Fig. 8 is a side view, similar to Fig. 1, but showing another embodiment of the invention;

Fig. 9 is a front view, partly in section, of the vibrator arrangement of the embodiment of Fig. 8;

Fig. 10 is a side view, similar to Fig. 8, but showing a still further embodiment of the invention;

Fig. 11 is a front view, partly in section of the embodiment of Fig. 10;

Fig. 12 is a side view, similar to Fig. 10, showing yet another embodiment;

Fig. 13 is a rear view of the embodiment in Fig. 12;

Fig. 14 is a side view, partly in section, of still yet another embodiment;



Fig. 15 is a rear view of the embodiment of Fig. 14;

Fig. 16 is a side view, partly in section, of still a further embodiment, of the invention;

Fig. 17 is a side view, partly in section, of the embodiment of Fig. 16, with the apparatus in a different position;

Fig. 18 is a side view, partly in section, of a further still embodiment, similar to Fig. 16;

Fig. 19 is a side view of the apparatus of Fig. 18 with such apparatus in a different position;

Fig. 20 is a side view, partly in section, of still another embodiment of the invention;

Fig. 21 is a side view, similar to Fig. 20, but with the apparatus in a different position; and

Fig. 22 is a side diagrammatic view, of a still further embodiment of the apparatus of the invention.

The following are detailed descriptions of the various embodiments.

Figure 1 shows a side view of the first embodiment of the invention, has a structure for vibrating a driver's seat 1 by a motor 10 installed on the underside of the driver's seat wherein the vibration is transmitted to the driver's seat 1 when vibration motor 10 is activated. Driver's seat 1 is mounted on base 2 and, as best shown in Figure 2, is attached to base 2 by angle fasteners 3 shaped like an L, and which face each other, at a position toward the front and a rear end of base 2. Stationary plates 1a, are fixed, by bolts 4, on the radial outward slants of said support



boards 3 at the front end and the rear end of the base of seat 1. The other side of support boards 3 are welded on the upper side of base 2. Vibration motor 10 is fixed with bolts 5 on the underside of base 2. Rotation axis 10a of vibration motor 10, extends horizontal in right and left direction, as viewed from the front of the driver's seat 1 and from the front of automobile 15 shown in Figure 3. As shown in Figure 4, eccentric loads 13, comprising fixed load 13a and an adjustable load 10, are installed on opposite ends 10b of rotation axis 10a; the direction of rotation being indicated by an arrow in Figure 1 of vibration motor 10. The centrifugal force caused by eccentric loads 13, rotating at the opposite ends of rotation axis 10a, causes base 2, and seat 1 mounted thereon, to vibrate. In Figure 4, 10c is a stator core and 10d is a rotor core of vibration motor 10 which is an electric motor.


Base 2, supporting seat 1 is elastically supported by its corner, Fig. 2, on bed 6. Bed 6 is fixed on the floor 16 of an automobile 15, Fig. 3. Hollow rectangular barrel frames 7, Figs. 1 and 2, comprising of frame bodies 7a and 7b, Fig. 5, are welded together on the front and rear on the upperside of bed 6, and spring supports 8 are installed on the right and left, Fig. 1 and 5, front and rear, Fig. 2, of the upperside of rectangular barrel frames 7. Spring supports 8 each comprise a disc type bottom parts 8a, support parts 8b installed on the middle of the upperside of disc type bottom parts 8a, and passenger 8c penetrating both bottom parts 8a and support parts 8b. Bottom parts 8a are fixed on the



upperside of rectangular barrels 7 with screws 9. Support parts 8b are engaged, from the outside, with springs 11. Bolts 12 are inserted through each passage 8c. Each bolt 12 is inserted from the upperside into each bolt hole 2a, on base seat 2. The nut screw part of each bolt 12 is fixed such as by welding on the ceiling of each rectangular barrel 7 before the frame bodies 7a, 7b are welded. Thus, the underside of the base 2 for installation of seat 1 is elastically suspended on the upper end of springs 11.

In an automobile 15, Fig. 3, as shown in Figures 6 and 7, a controller console panel 14 is set up on the right side, facing forward, of the driver's seat 1. On console panel 14, power-on switch 14a, power-off switch 14b, operation switch 14c, frequency handle 14d, enabling the speed and the number of vibration frequency of vibration motor 10 to be varied and set at a desired frequency, and a timer 14e, for setting timer for start-up and stopping of vibration motor 10 and seat vibration caused thereby, are arranged. Controller console panel 14 also contains an inverter (not shown) so that an electric current from a battery 17 installed in the front part of an automobile 15 is converted into alternating current for supply to the vibration motor 10. In this first embodiment, the apparatus can provide the driver's seat, whose maximum unload is 100 kgs., with 20 Hz in the number of vibration frequency and 15 mm of the amplitude of the vibration for vibrating the driver's seat 1 up-down and back-forth.

When the driver feels drowsiness coming on the driver can turn on power-on-switch 14a and then turn on operation-switch 14c so



that vibration motor 10 operates, generates vibration and such vibration is transmitted through base 2 to driver's seat 1 through support boards 3 and stationary plate 1a to driver's seat 1 and driver's seat 1 vibrates on springs 11. The vibrating driver seat 1 keep the driver alert and wards off dozing during driving.

In Figs. 8 and 9, a modification of the embodiment of Figs. 1-7 is shown and will now be described. In this second embodiment, a pulley 26 is set up on the underside of the base 2. Vibration motor 10 is fixed by bolts 23 on the underside seat base 2 and pulley base 22. Rubber vibration insulators 24, covering bolts 23 are fixed between the upperside of support 10b of vibration motor 10 and the underside of pulley base 22. Rotation shaft 25, on which pulley 26 is mounted, is installed horizontally between left wall 22a and right wall 22b of pulley base 22, under driver's seat 1 and is connected by belt 21 to pulley 20 mounted on rotation shaft 10a vibration motor 10. Support parts 27, Fig. 8, are set up on the bed 6, whereby the driver's seat is elastically suspended through rubber vibration insulators 28. Parts, except for those described above, are the same as those in the first embodiment and the same numbering is adopted. In Figure 9, 29 and 30 are bearings.

According to this second embodiment, vibration generated by vibration motor 10 is transmitted mainly through pulley 20 near on shaft 10a of motor 10 and belt 21 to the pulley 26 near to the driver's seat 1 and, furthermore, from pulley 26 under seat base 2,



through rotation shaft 25 to the base 2 for the driver's seat 1, and so on.

Rubber vibration insulators 24 on the part receiving pulley 22, receiving vibration motor 10, reduce troubles caused by vibration.

Figs. 10 and 11 show a third embodiment of the invention similar to the first and second embodiments. In such third embodiment, a motor 32 is installed on the underside of the part receiving the pulley 22 and an eccentric load 34 is fixed on rotation shaft 33 supported for rotation on walls 22a (left) and 22b (right) of pulley base 22. The other parts in the embodiment are the same as those of the second embodiment and the same numbering is adopted.

According to this third embodiment, when the rotation of the motor 32a is transmitted through rotation shaft 32a of motor 32, pulley 20 and belt 21 to pulley 26 and rotation shaft 33, eccentric load 34 on rotation shaft 33 vibrates and such vibration is transmitted to base 2 of driver's seat 1. In this third embodiment, motor 32, itself, does not vibrate and the durability of the motor 32 is drastically improved.

In the above first through third embodiments, the rotational axes of the vibration motor and pulley shafts extend transverse the direction of travel of the vehicle 15, Fig. 3. However, this is not intended as limiting in scope and also each of them can be installed in the same direction as the direction of travel of the vehicle 15.



Also, in the above first through third embodiments, a bed 6 is fixed on the floor 16 of vehicle 15. This, also is intended not as limiting in scope and the base 6 may be fixed on the floor 16 slidably in back-forth directions.

Figs. 12 and 23 show a fourth embodiment of the invention. In such fourth embodiment, a U-shaped flat spring 42 is installed between a driver's seat 1 and a base 38 and an electro-magnet 43 is connected to one of the ends 42a and 42b of the flat spring 42, while a permanent magnet 44 is connected to the other of the end 42a and 42b. Vibration of spring 42 is generated by sending electrical current into electro-magnet 43 and such vibration is transmitted to the driver's seat 1 so that the driver's seat 1 vibrates. In detail, an upper vibrating body 40 is fixed under the driver's seat 1 and a concave part 40a is formed in the middle on the underside of said vibrating body 40. And also, the lower vibrating body 41 is fixed on the upperside of said base 38 by bolts 47 and a rubber vibration insulator 48, which covers bolts 47, is fixed between the upperside of the base 38 and the underside of lower vibrating body 41. A concave part 41a is formed in the middle on the upperside of vibrating body 41. A U-shaped flat spring 42 is mounted between concave parts 40a and 41a. Height-adjustable bolt 39, is adjustable to fix the height of base 38 on the floor 16 of automobile 15, Fig. 3.

The underside of lower bar 42a of flat spring 42 is welded to the bottom face of concave part 41a of lower vibrating body 41, while the upperside of upper bar 42b of flat spring 42 is welded on



the upperside of concave part 40a of upper vibrating body 40. An electro-magnet 43 having a fixed iron core 46 wound with coil 45, is fixed on the upperside of lower bar 42a of flat spring 42, while a moving iron core 44 is fixed on the underside of the upper bar 42b. Support board 48 is fixed on the side part of lower vibrating part 41 by a bolt 49. Controller 50 is fixed on support board 48 by a bolt 51. Controller 50 contains an inverter, same as in the above Example 1, and also electric current adjustable handle 51a, and the like, and controlling alternating current supplied to coil 11, are installed on console panel set up in the rear side of controller 50.

As shown in Figure 13, lower vibrating body 41 and upper vibrating body 40 are connected, at opposite right and left sides, by flat spring 52. Thus, the upper part of flat spring 52 is fixed on the upper stay 55, fixed on said upper vibrating body 40 by bolts 54, while the lower part of flat spring 52 is fixed on the lower stay 58, fixed on the lower vibrating body 41 by bolts 57. In such a fixed state, flat spring 52 is tilted toward the rear, as shown in a chain line of Figure 12, so that it works to set resonance frequency. In the third embodiment, 100 kgs. for a seat maximum load, 20Hz for number of vibration frequency and 15mm vibration for amplitude (vertical vibration of the driver's seat is such that its vibration is a little tilted backward direction) are given to the driver's seat 1.

In the fourth embodiment, if a driver feels drowsiness coming on, the driver can turn on power-on switch and then operate an



electric current adjustable handle 51a, installed on a console panel, so that suitable alternating current is sent to a coil 45 of electro-magnet 43. Because magnetic flux is generated on fixed iron core 46 of the electro-magnet 43, moving iron core 44 is attracted toward fixed iron core 46 and the rear part of upper vibration body 40 is tilted downward. When the alternating current becomes zero, the attracting force becomes zero and at the moving iron core 44 is returned to the original position by elastic stress of flat spring 42. In addition, both flat springs 42 installed between opposite sides of lower vibrating body 41 (left) and said upper vibrating body 40 (right) establish resonance frequency trailing the movement of upper vibration body 40. Thus, lower vibrating body 41 and upper vibrating body 40 vibrate vertically (in a direction tilted backward a little), and such vibration is transmitted, through upper vibrating body 40, to the driver's seat 1. A driver seated in the driver's seat 1 is kept alert by the vibration of the driver's seat and is not liable to doze off during driving.

Fig. 14 and 15 show a fifth embodiment. In the fifth embodiment, a groove 41b is formed on the bottom face of the concave part 41a of lower vibration body 41 and the lower end of compression coil spring 60 is positioned in groove 41b and fixed. Groove 40b is formed on the upperside of the concave part 40a of upper vibration body 40, and the upper end of said compression coil spring 60 is positioned in groove 40b and fixed. Electro-magnet 43 is fixed on the bottom face of concave part 41a of lower vibration

body 41 inside of compression coil spring 60. Moving iron core 44 is fixed on the upperside of the concave part 40a of the lower vibration body 40 inside the compression coil spring 60. As shown in Figure 15, lower vibration body 41 and upper vibration body 40 are connected with flat spring 61 at its opposite right and left ends of body 41. One end of flat spring 61 is fixed by a bolt 65 on a lower stay 64 fixed on lower vibration body 41 by a bolt 63, while the other end is fixed on the upper stay 67, fixed on upper vibration body 40 by bolt 66. Flat spring 61, in such a fixed state and in a horizontal position, as shown by a chain line of Figure 14, operates so as to set resonance frequency. In this fifth embodiment, mainly, a vertical vibration is given to the driver's seat. The other parts, except for the above, are the same as those of the fourth embodiment and the same numbering is adopted.

In the above fourth and fifth embodiments, electro-magnet 43 is used for the lower vibration body 41 and a moving iron core 44 is used for the upper vibration body 40. This, however, is intended not as limiting in scope and it is possible that electro-magnet 44 is used for the upper vibration body 40 and a moving iron core 44 can be used for the lower vibration body 41.

In the sixth embodiment of Fig. 16, a pneumatic cylinder vibrates driver's seat 1. A pneumatic cylinder 70, having an upper wall 71a, has a rod 72 passing through in rod hole 71b, formed on the middle part of an upperside 71a of cylinder body 71. The driver's seat 1 is fixed on the upper end of rod 72, while piston



73 is fixed on the lower end. Piston 73 is slidable, vertically, in cylinder chamber 74, the piston dividing cylinder chamber 74 into an upper chamber 75 and a lower chamber 76. A spring 77 is arranged between the concave part of the upper side 71a of cylinder body 71 and the concave part of the upperside of the piston 73, and piston 73 is pressed downward by energy of piston 73. A line 78 is extended from lower chamber 76 and connected to a channel control valve 80.

In channel control valve 80, a valve rod 82 is arranged slidably inside a casing 81 and an iron core, or permanent magnet 83, is installed at the left end of the valve rod 82. A maximum diameter part 82a is formed in valve rod 82, dividing the casing 81 into two parts, a right chamber 84 and a left chamber 85. Electro-magnet 86 is fixed on a part of the housing of control valve 80 to the right from the left end by a definite distance on the chamber 85, while air-supply line 88, extended from a compressor 87, is connected to chamber 85. Spring 89 is positioned in right chamber 84 and valve rod 82 is pressed toward the left, Fig. 16, by energy of the spring 89. A passage 90 to atmosphere, leads from right chamber 84.

Electro-magnet 86 is electrically connected, through an inverter, with a battery 17 of an automobile 15 such as in the fourth embodiment. And an on-off switch for vibration, which controls the supply of electricity to electro-magnet 86, is arranged on a console panel 18 of an automobile 15, Fig. 3. When



the switch for vibration is pushed, the electro-magnet 86 is charged with alternating current.

In this embodiment, as shown in Fig. 16, in normal condition the vibration switch is not pushed and electro-magnet 86 is not charged with electricity and magnetic force is not generated in the electro-magnet 86. The valve rod 82 is pushed to the left by elastic energy of spring 89 and contacts the leftside of a casing 81, wherein the maximum diameter part 82a of valve rod 82 is positioned between the connected line 78 and air supply line 88. Thereby, connected line 78 and atmosphere passage 90 are connected through the right chamber 84, while the communication of a line 78 and air supply line 88 are cut off by the maximum diameter part 82a. Therefore, the air of lower chamber 76 is connected to the atmosphere so that piston 73 is pressed downward to downside of the cylinder 71 by elastic energy of the spring 89 and the driver's seat 1 is supported by the upper wall 71a of cylinder body 71. In this case, the air from a compressor body 87 is released to the atmosphere outside by the compressor body 87, itself, or means for releasing air, which is arranged in the air supply line 88 (not shown in Figures).

When a driver feels drowsiness coming on during driving and the driver pushes on a switch for vibration, electro-magnet 86 is not charged with alternating electricity. At that time, magnetic force is generated in said electro-magnet intermittently in a short pitch, wherein iron core 83 is attracted toward the position where electro-magnet 86 is installed, that is toward the right, Fig. 16.

Therefore, the valve rod 82 moves against elastic force of the spring 89, and, as shown in Figure 17, the communication of the line 78 and the passage to atmosphere 90 is cut off by maximum diameter part 82a and line 78 and the passage to air supply line 88 are connected through chamber 85. Air, at air pressure of 3 - 5kgs) is force-fed from compressor 87 into a lower chamber 76. Piston 73 (the area receiving the pressure is 20cm^2) rises and the driver's seat 1 rises together. In the condition that magnetic force is not generated in electro-magnet 86, as mentioned in the above, because line 78 and the passage to atmosphere 90 are connected, the air in the lower chamber 76 is connected with the outside atmosphere, Fig. 16, the piston 73 is pressed downward by the energy of the spring 77 and also the driver's seat lowers. The raising and lowering of the driver's seat 1, like this repeats while the switch for vibration is pressed. In this way, if a driver feels drowsiness, the driver can vibrate the driver's seat 1 by repeating rise and fall of such driver's seat by operating the switch for vibration installed in the control panel 18. Therefore, the driver remains alert, does not doze off during driving, and traffic accidents caused by dozing during driving can be prevented.

In the seventh embodiment of the invention shown in Fig. 18, means for releasing air from compressor 87 into the atmosphere outside is installed in the channel control valve 91. This means that in the channel control valve 91 of this embodiment, as shown in Figure 18, the maximum diameter parts of 92a and 92b of valve rod 92, are formed at the definite distance between them in the



valve rod 92, whereby the casing 93 is divided, respectively, into a right chamber 95, a middle chamber 96 and a left chamber 97. Also, a line for releasing force feed air 94 is arranged in the casing 93, whose end opens to the outside of the automobile through a hole (not shown in Figures) formed in the floor 16 of the automobile 15, Fig. 3, into the atmosphere outside. The other parts, except for these parts, are the same as those of the above Example 6 and the same numbering is adopted.

According to the seventh embodiment, the connected line 78 and the air supply line 88 are connected through the middle chamber 96 when magnetic force is generated in electro-magnet 86, as shown in Figure 18. The connected line 78 and the line for the passage to the atmosphere 90 are connected through the right chamber 95, while the air supply line 88 and the line for releasing force feed air 99 are connected through the middle chamber 96, when magnetic force is not generated in electro-magnet 86, as shown in Figure 19. Thereby, when the compressor 87 is driving, the air pressed by compressor 87 is not sent to the lower chamber 76 of the cylinder chamber 74 so that the air can be discharged to outside of the automobile.

In the embodiments, the combination of the valve rod 82 (92) combined with the spring 89 are adopted for the channel control valve 80 and 91. However, a rotary valve type is also acceptable.

In the eighth embodiment of Fig. 20, the driver's seat 1 is vibrated by a hydraulic cylinder. In detail, in hydraulic cylinder 120, a T-shaped piston rod 123 slides vertically. The driver's



seat is fixed on a supporting part of the seat 123a formed at the upper end of piston rod 123. The cylinder chamber has a pressure chamber 126 formed between upper and lower hydraulic packings 122a and 122b, respectively. Pressured chamber 126 is divided into an upper pressure chamber 124 and a lower pressure chamber 125 by a maximum diameter part 123b formed on piston rod 123.

In servo valve 101, pilot stage 102 and power stage 103 are formed, and first valve rod 104 is arranged vertical-sliding-freely in the pilot stage 102, while the second valve rod 105 is arranged vertical-sliding-freely in the power stage 103. Pilot stage 102 is connected through fifth line 106 to an upper part of power stage 103, and through sixth line 107 to a lower part of power stage 103. Power stage 102 is connected through the first line 127 to an upper pressure chamber 124 of the cylinder chamber and through the second line 128 to a lower pressure chamber 125, through third line 113 to a hydraulic pump, not shown, and through forth line 115 to first line for returning oil, respectively. A vibration generator, by dynamic electricity 108, is arranged under pilot stage 102. Coil 108a is positioned inside its vibration generator by dynamic electricity 108 while controlled body 110 is energized, upward, by a spring 109 in the upper part of the vibration generator. Coil 108a is, as in the fourth embodiment, electrically connected through an inverter with the battery 17 of the automobile 15, Fig. 3. Electricity supplied from the inverter to the coil 108a is converted into alternating current. An on-off switch, not shown, controls electric supply to coil 108a and is installed in the



control panel 18, so that the controlled body 110 can be controlled vertical-sliding-freely by sending alternating current to coil 108a. Controlled body 110 contacts first valve rod 104. The first valve rod 104 is energized upward, and also energized upward by an extension spring 111 fixed on the upper part of the pilot stage 102. The first displacement transducer 112, which detects a displacement in the lower part 105a of the second valve rod 105, is installed in the lower part of the power stage 103. The detection signal is sent to the vibration generator by dynamic electricity 108 as feedback. On the other hand, the second displacement transducer 129, which detects displacement in the lower part 123b of piston rod 123, is installed in the lower part of cylinder chamber 126. Such detection signal is sent to the vibration generator by dynamic electricity 108 as feedback. In Figure 20, 116 is the second line for returning oil 117 is the seventh line connected with the hydraulic pump and 118 is a diaphragm, which are installed in the oil tight condition, on the controlled body 110 and the vibration generator by dynamic electricity 108.

In the above structure, when alternating current is sent to the coil 108a of the vibration generator by dynamic electricity 108 so that the controlled body is moved upward, as shown in Figure 21, the first valve rod 104 moves upward and the seventh line 117 is connected with the sixth line 107 so that oil force fed by the hydraulic pump is supplied from the lower end of the power stage 103 to inside the power stage 103. At that time, the second line for returning oil 116 and the fifth line 106 are connected so that



oil is returned from the upper end of the power stage 103 to a tank (not shown in Figures). Thereby, the second valve rod 105 moves upward and, as a result, the third line 113 is connected with the second line 128 so that the oil from the hydraulic pump is supplied to the lower pressure chamber 125. The first line for returning oil 114 and the first line 127 are connected through the fourth line 115 so that oil is returned from the pressure chamber 124 to the tank. Thereby, piston rod 123 is moved upward and the driver's seat 1 rises. When the controlled body 110 is moved downward, in an opposite reaction against the above, the piston rod 123 is moved downward so that the driver's seat falls. Thus, accompanying with the vertical movement of the controlled body 110, the driver's seat vibrates. In this case, the amount of inflow oil and outflow oil to a lower pressure chamber 125 or an upper pressure chamber 124, changes by the displacement of the first valve rod 104 in the pilot stage 102, so that the piston rod 123 vibrates at a speed in proportion to the oil flow. The detection signals from the first displacement transducer 112 and the second displacement transducer 129 are sent to the vibration generator by dynamic electricity 108 as feedback, which enables precise control.

In the eighth embodiment, if a driver feels drowsiness coming on, the driver can operate switches installed on a control panel such as control panel 14, Fig. 6, whereby alternating current is sent into the coil 108a of vibration generator by dynamic electricity 108 so that a servo valve 101 operates to supply oil from the hydraulic pump to the pressure chambers 124 and 125 of the

hydraulic cylinder 120 and the piston rod 123 moves vertically and the driver is kept alert and traffic accidents will be prevented.

In the ninth embodiment in Fig. 22, the vibration generator, by dynamic electricity 130, is adapted to vibrate the driver's seat 1. In detail, support axes 133 of the vibration generator, by dynamic electricity 130, are extended from opposite sides, at the right and left in horizontal direction, and supported by support base, not shown. And also, in the vibration generator by dynamic electricity 130, a base 135, wherein the driver's seat is fixed, is supported by iron core 134. The iron core 134 has an annular body magnetic pole 136, an annular upper yoke 137 fixed on an upper part of annular body magnetic pole 136, a circular lower yoke 138 fixed on a lower part of body magnetic pole 136, an annular upper center magnetic pole 139 and a lower center magnetic pole 140, arranged concentrically, wherein annular exciting coils 143 and 144 are arranged concentrically in two divided spaces of upper annular chamber 141 and lower annular chamber 142 formed thereby. Both exciting coils 143 and 144 are, like in embodiment four, electrically connected with the battery 17 of the automobile 15, so that the battery supplies direct current to both exciting coils 143 and 144.

An annular cavity 145, connecting the spaces of upper chamber 141 and lower chamber 142, is formed concentrically with exciting coils 143 and 144 in a central annular projecting portion 136a of body magnetic pole 136, while a bore 146 is formed through the center of upper center magnetic pole 139. Linear ball bearing 149



is fixed on the upper part of pit 146. A connecting holes 151, connecting with upper space 141, are formed at regular intervals in upper yoke 137. A hole of small diameter is formed on the upper portion of lower center magnetic pole 140, and a hole of larger diameter is formed under the hole of small diameter. Linear ball bearing 147 is fixed in the small diameter while air spring 148 is positioned in the hole of larger diameter.

Supporting rod 150, which extends downward from the center of the underside of base 135, passes through bore 146 of upper center magnetic pole 139 and the hole of small diameter of lower center magnetic pole 140 and is supported by air spring 148, for free vertical-sliding-movement by linear ball bearings 147 and 149. Connecting piece 152 extends downward through connecting hole 151 on the lower part of base 135, and is connected, through connecting hole 151, with annular driving coil 153. Driving coil 153 is arranged in the cavity concentrically with concentric exciting coils 143 and 144. Driving coil 153 is electrically connected, through an inverter, with battery 17, whereby electricity, supplied to the driving coil 153 is converted into alternating current. An on-off switch, not shown, controls the supply of electricity to driving coil 153 and is arranged in a control panel, such as control panel 14, Fig. 6. In Figure 22, 154 is an air seal and 155 is a loop spring, which works as a baffle.

In the ninth embodiment, when the switch of the control panel is turned on, direct current is charged through exciting coils 143 and 144 and magnetic flux in the direct of arrow A is formed and



alternating current is charged through the driving coil 153 at right angles to the magnetic flux of the direct current in coils 143, 144. According to Fleming's rule, an excitation force works in the B arrow directions, and the driver's seat vibrates. Therefore, if a driver feels drowsiness coming on, the driver can vibrate the driver's seat 1 by turning on the switch, preventing dozing during driving and accidents caused thereby.

EFFECTS OF THE INVENTION.

Thus, according to this invention, a driver's seat having a vibration generator connected to the driver's seat and controls for turning the vibration generator on and off for vibrating the driver's seat so that when a driver feels drowsiness coming on, the driver can operate the controls for switching on-off the vibration generator so that the driver's seat can be vibrated and prevent the driver from dozing during driving and prevent an accident from occurring.



Claims

1. A vibratile seat (1) with means for vibrating the seat and means for turning the means for vibrating the seat on and off.
2. A vibratile seat according to claim 1 in which the means for vibrating the seat comprises a vibrating motor (10) connected to the seat.
3. A vibratile seat according to claim 1 in which the means for vibrating the seat (1) comprises a vibrating motor (10) elastically connected to the seat, a power transmission shaft (25) and a belt (21) connecting an output shaft (10a) of the vibrating motor and the power transmission shaft.
4. Means for vibrating a seat (1) comprising a motor (32) elastically connected to the seat (1), a power transmission shaft (33), an eccentric load (34) on the power transmission shaft and a belt (21) connecting an output shaft (32a) of the motor and the power transmission shaft.
5. Means for vibrating a seat (1) comprising a lower vibratile body (41), an upper vibratile body (40) on the lower vibratile body, a U-shaped flat spring (42) connected at one end to the lower vibratile body and at the other end to the upper vibratile body, an electro-magnet (43) on one end (42a) of the flat spring, a magnet (44) on the other end of the spring (42b) and facing the electro-magnet, and means (50) for controlling the energizing of the electro-magnet.
6. Means for vibrating a seat (1) comprising a lower vibratile body (41), an upper vibratile body (40) on the lower vibratile body, a coil spring (60) having a lower part on the lower vibratile body and an upper part on the upper vibratile





body, an electro-magnet (43) on either the lower or upper vibratile body, a magnet (44) on the other vibratile body and facing the electro-magnet and means (50) for controlling the energizing of the electro-magnet.

7. Means for vibrating a seat (1) comprising a rod (72) having one end freely slidable in the chamber (74) of a cylinder (70) and the other end projected outward from the cylinder chamber and connected to the seat, a piston (73) connected to the end of the rod in the chamber, means (78) for supplying pressure fluid to the cylinder chamber, a channel control valve (80) for supplying and discharging the pressure fluid to the chamber and means for controlling the valve for repeated free sliding of the piston.

8. Means for vibrating a seat (1) comprising an iron core (134) located under the seat, a support body (150) for supporting the seat, an elastic body (148) elastically supporting a lower end of the support body and positioned on the iron core, annular spaces (141,142) formed in the upper and lower ends of the iron core, an annular exciting coil (143,144) arranged concentrically in each of the annular spaces, a cavity (145) in each of the exciting coils and connecting the annular spaces, an annular driving coil (153) positioned in the cavity and freely slidable vertically, a bore (146) extending downward from the upperside of the iron core into the upper annular space of the annular space at each end of the iron core, a connecting piece (152) in the bore and the upper annular space and connecting the upper part of the support body (150) and the driving coil and means for supplying direct current to the exciting coils and supplying alternating current to the driving coil so that the driving coil may be vibrated vertically.





9. A vibratile seat (1) with means for vibrating the seat and means for turning the means for vibrating the seat on and off, in which the means for vibrating the seat is according to any of claims 4 to 8 .



ABSTRACT


VIBRATILE DRIVER'S SEAT

FIGURE 6

A driver's seat (1) connected to a vibration generator and control means (14) for turning the vibration generator on and off. When a driver begins to feel drowsy he can operate the controls to turn on the vibration generator. The vibrating seat prevents the driver from dozing during driving and may prevent accidents caused by the driver's drowsiness.




FIG 1

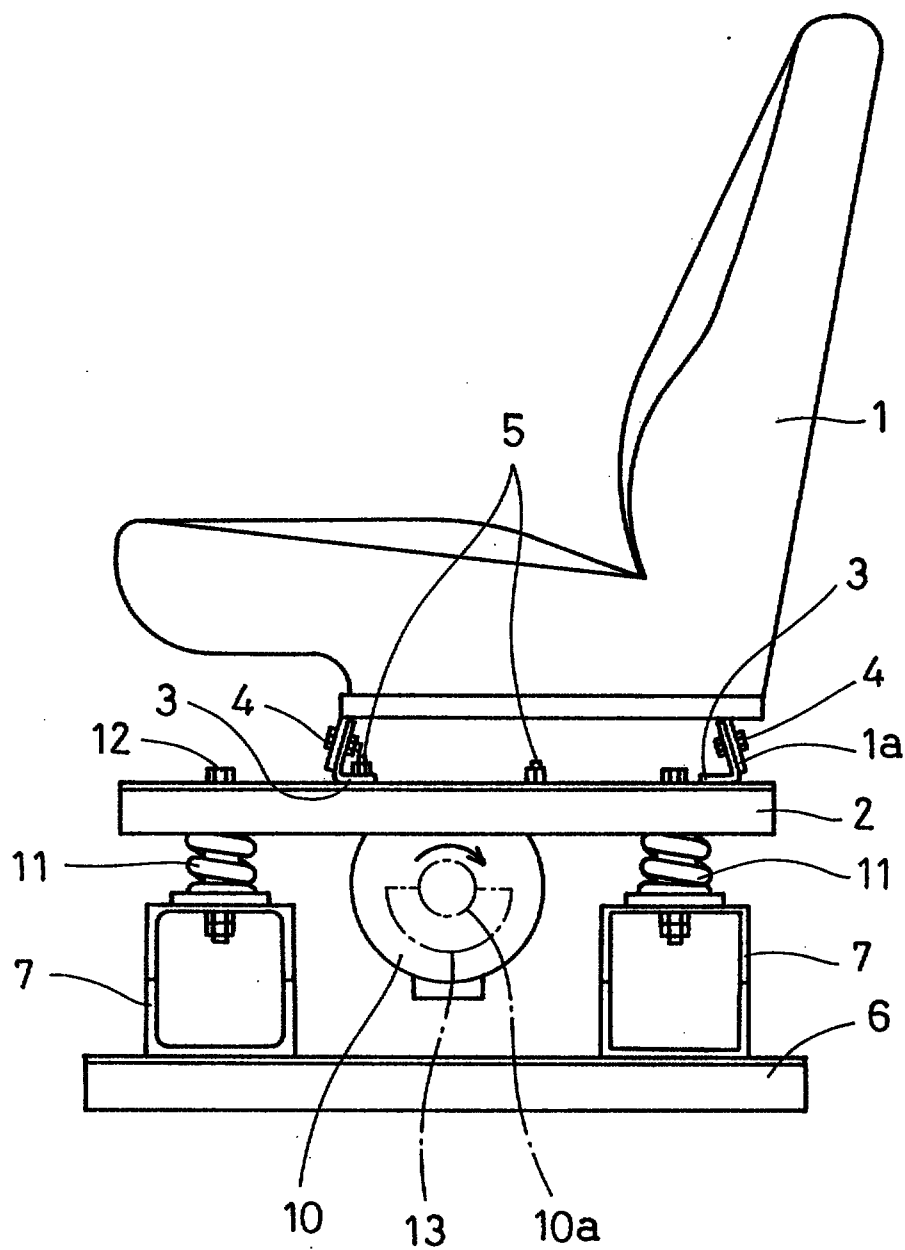

This Sheet Has Been Replaced




FIG 2

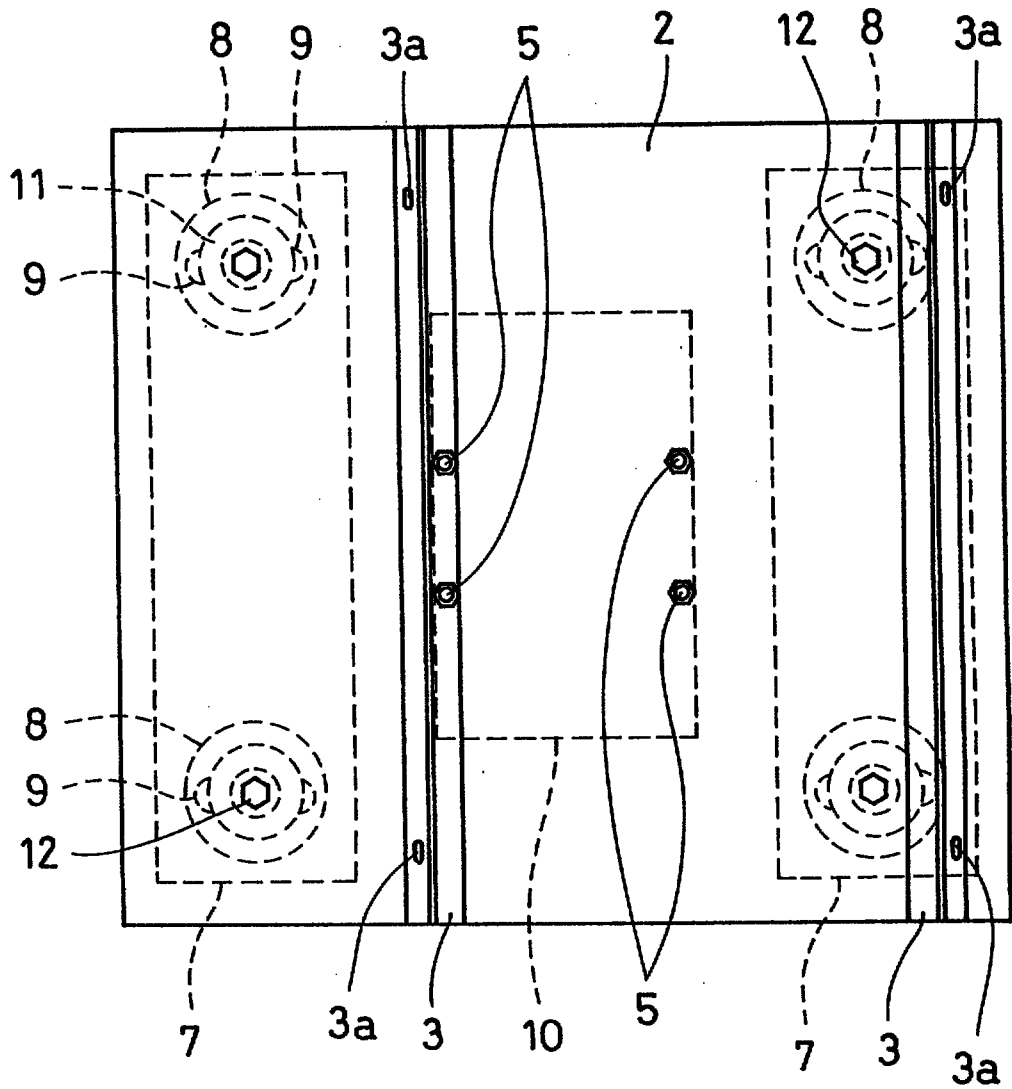

This Sheet Has Been Replaced



FIG 3

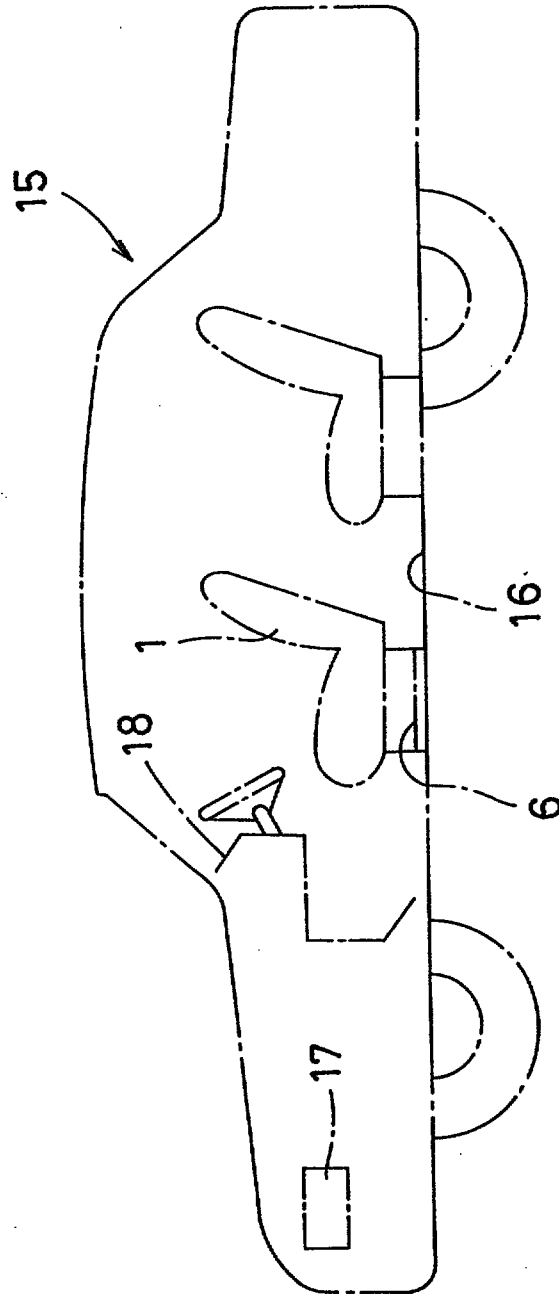

This Sheet Has Been Replaced



FIG 4

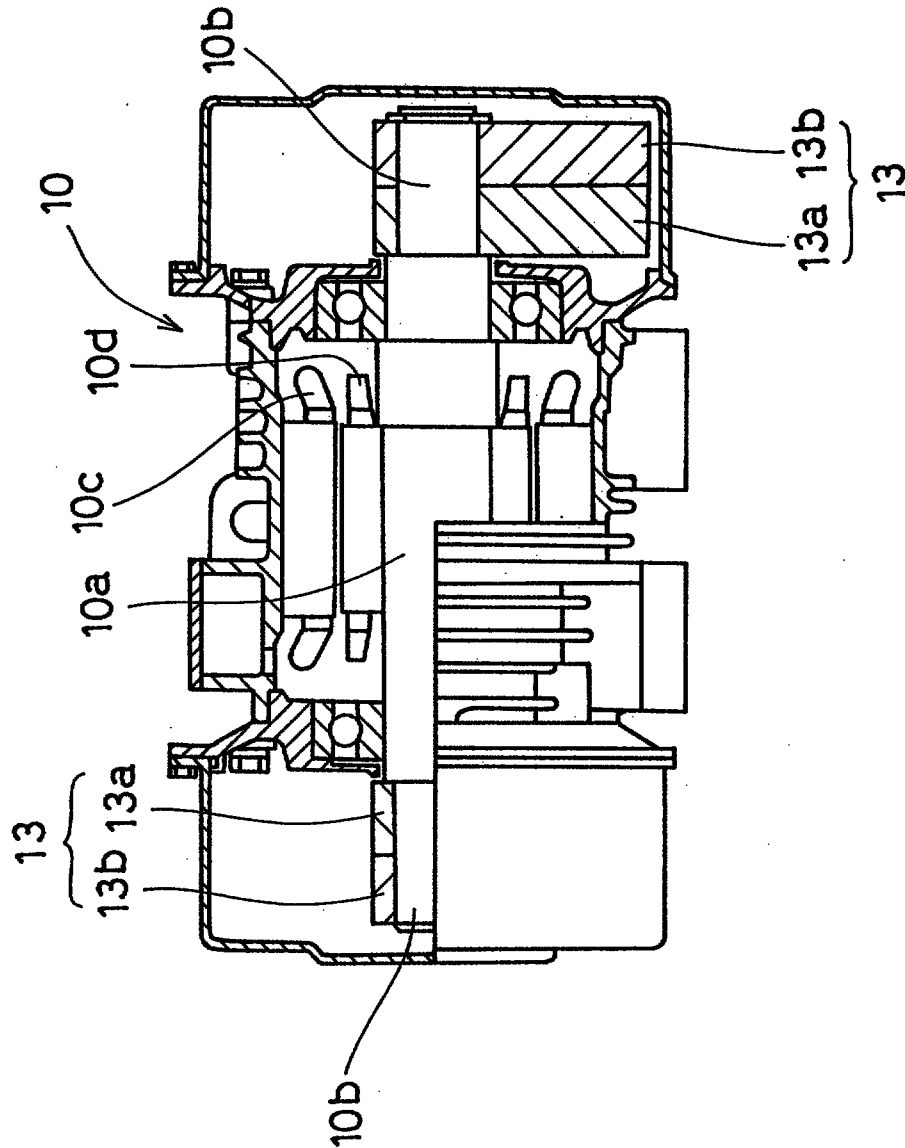


FIG 5


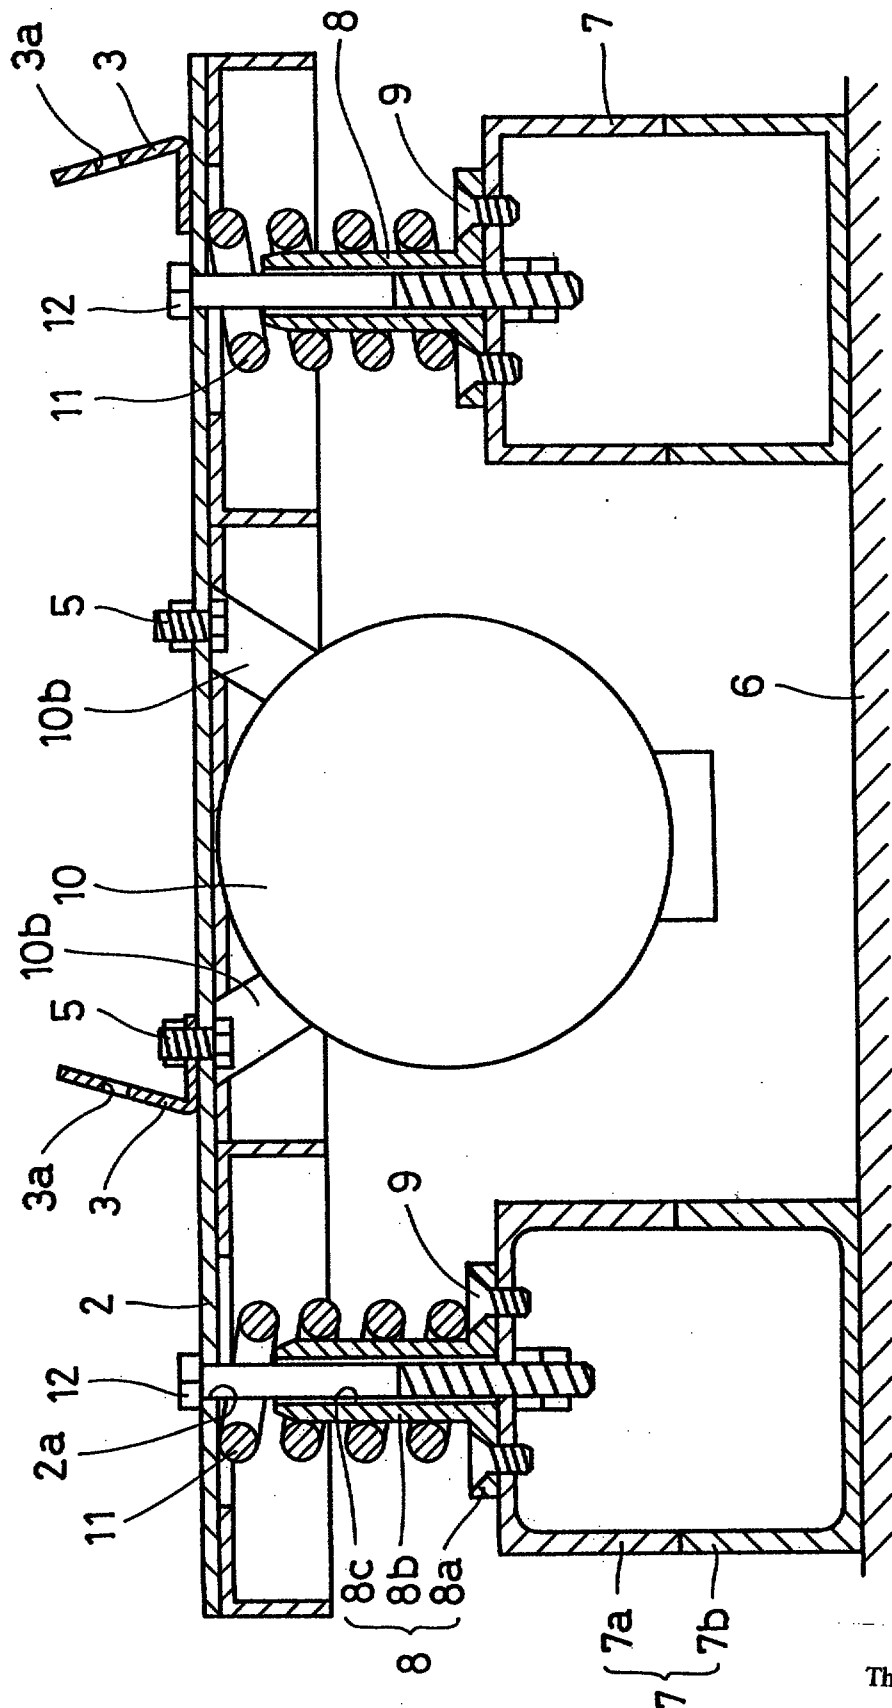


FIG 6

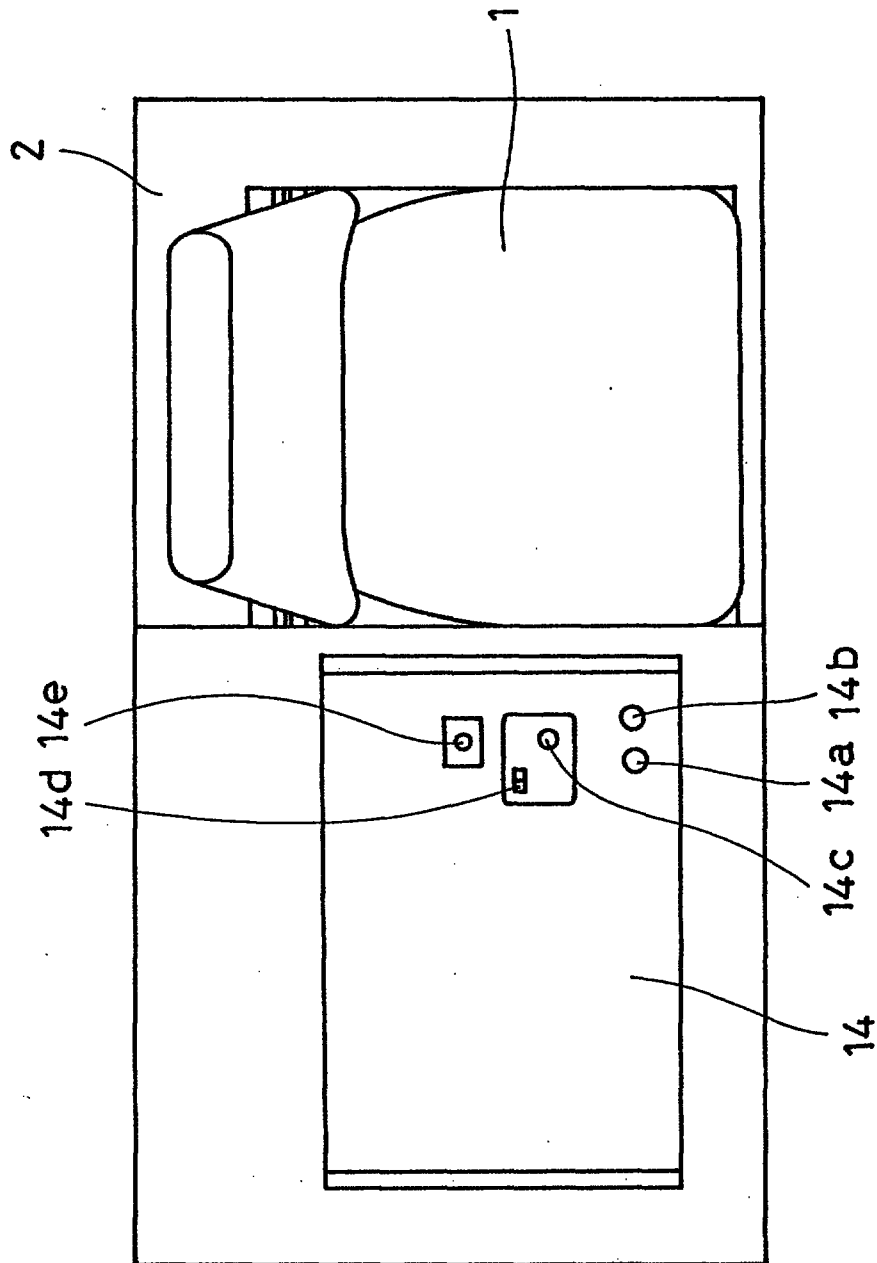

This Sheet Has Been Replaced



FIG 7

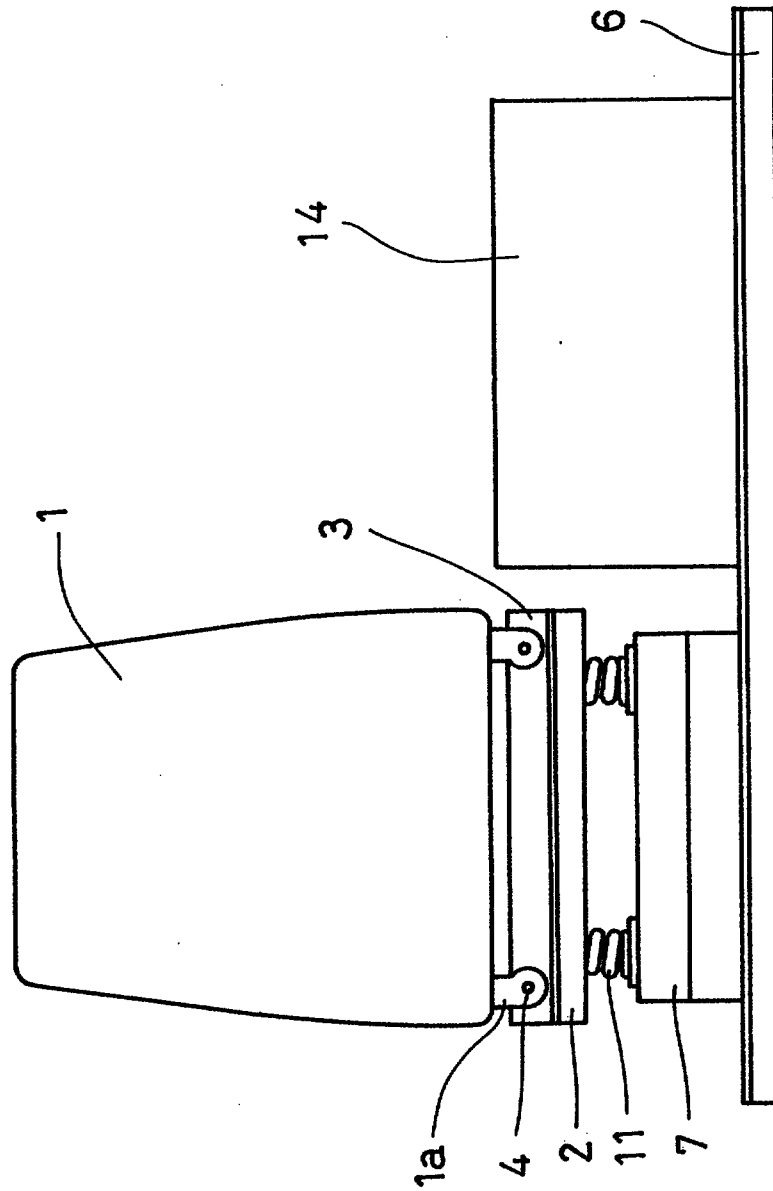


FIG 8

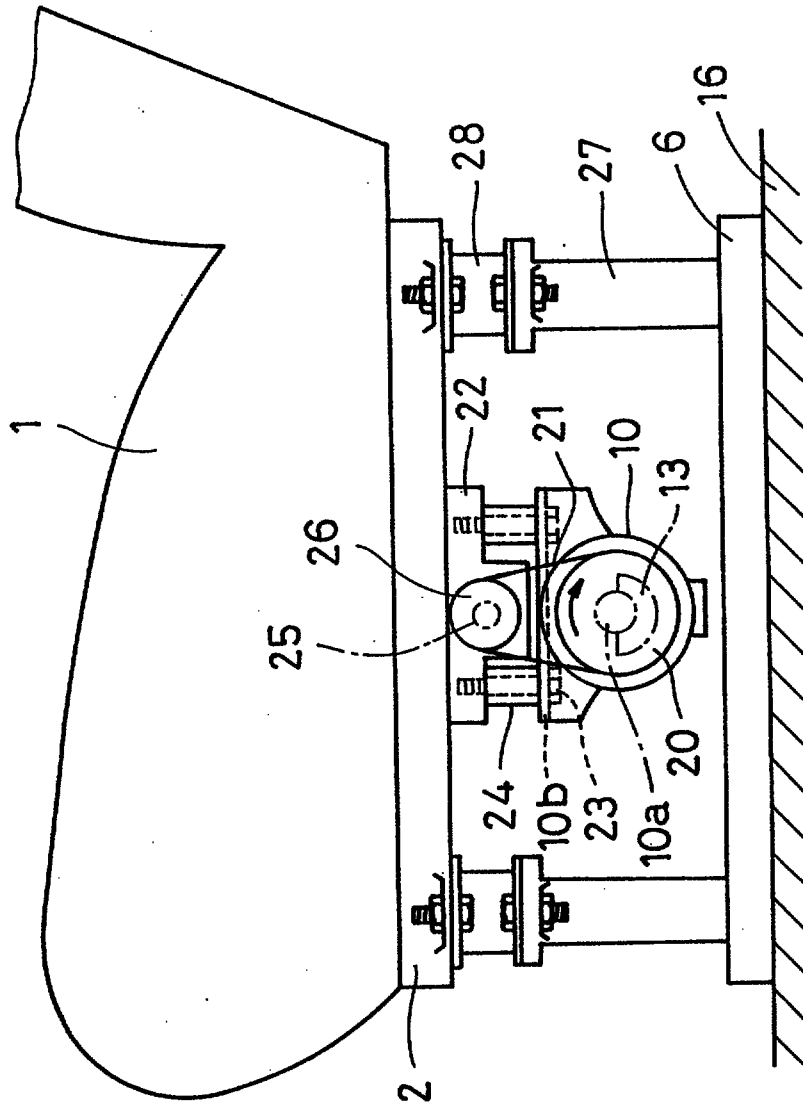


FIG 9

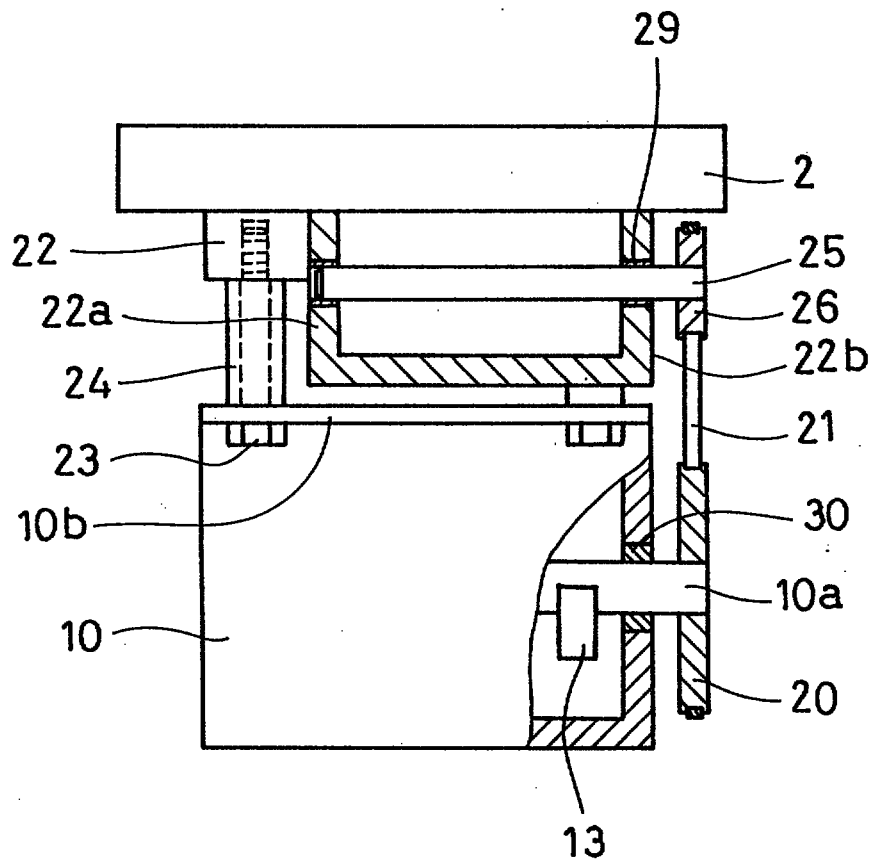


FIG 10


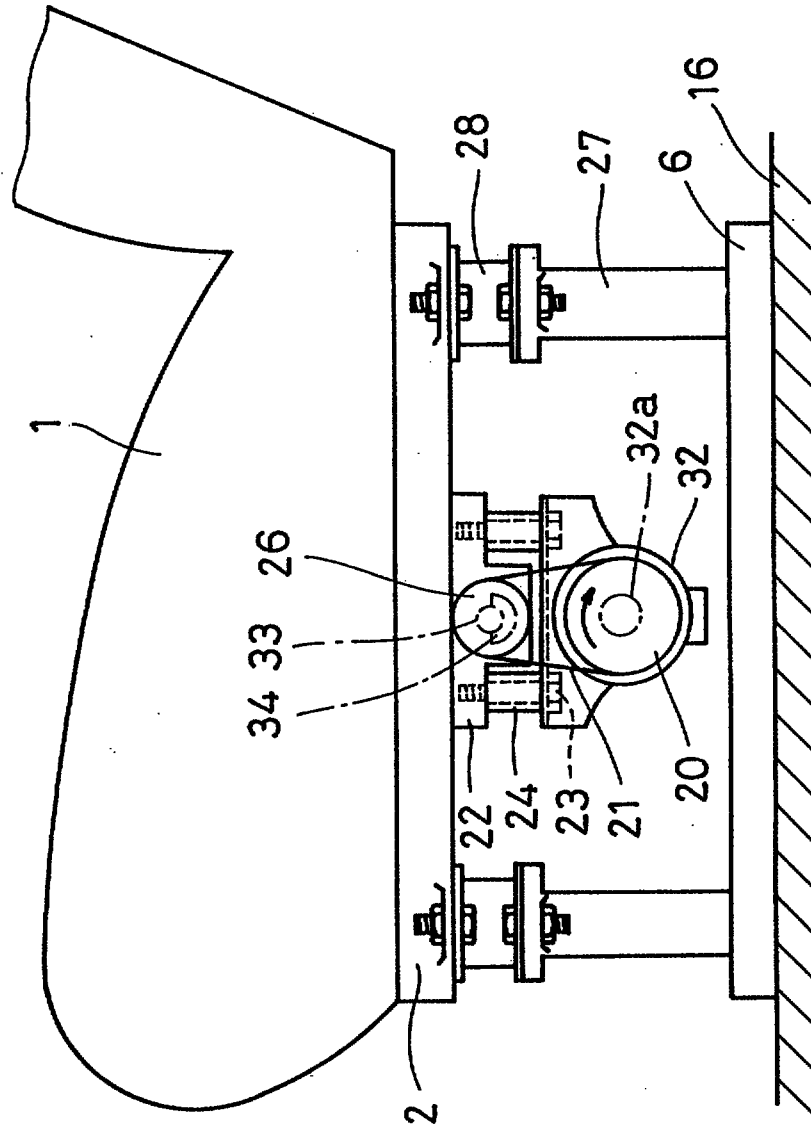



FIG 11

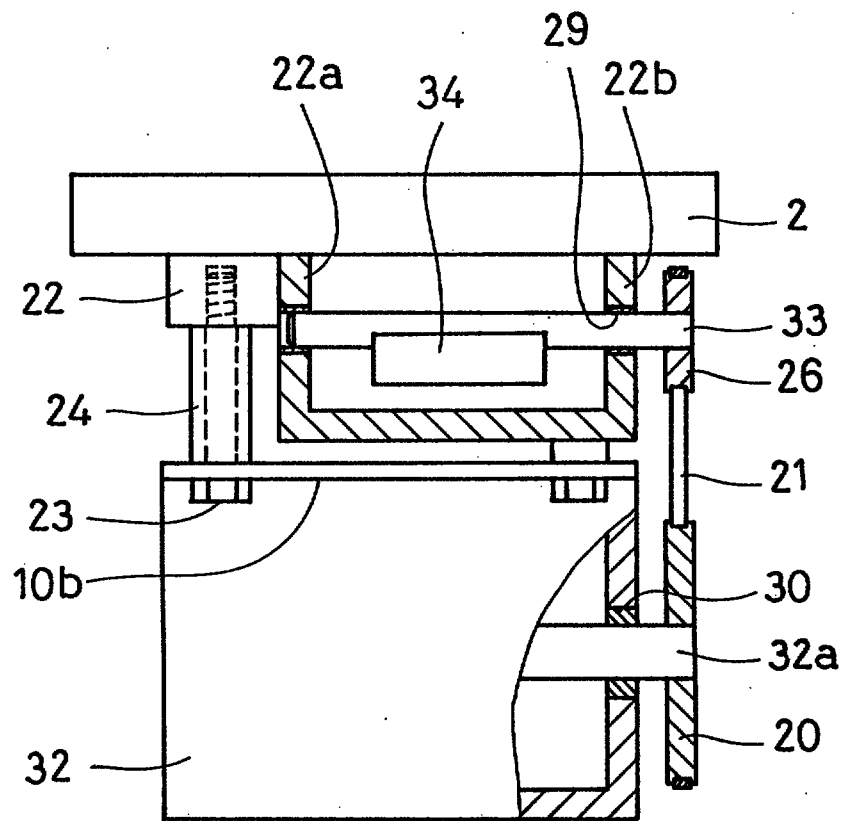

This Sheet Has Been Replaced




FIG 13

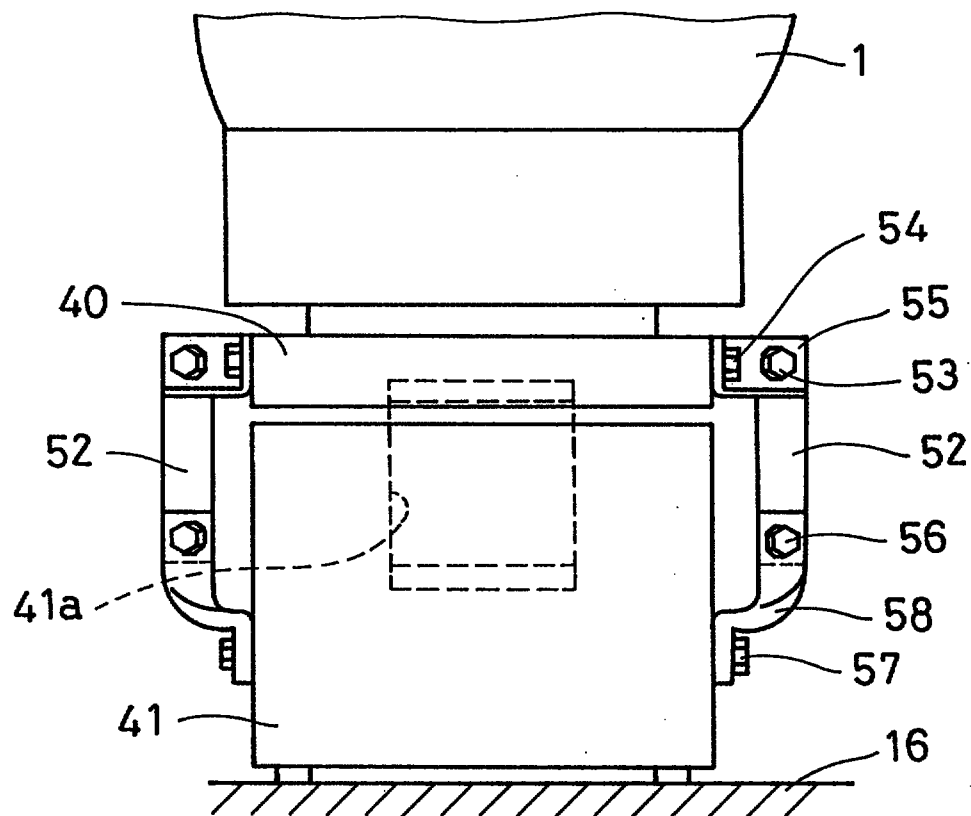

This Sheet Has Been Replaced




FIG 14

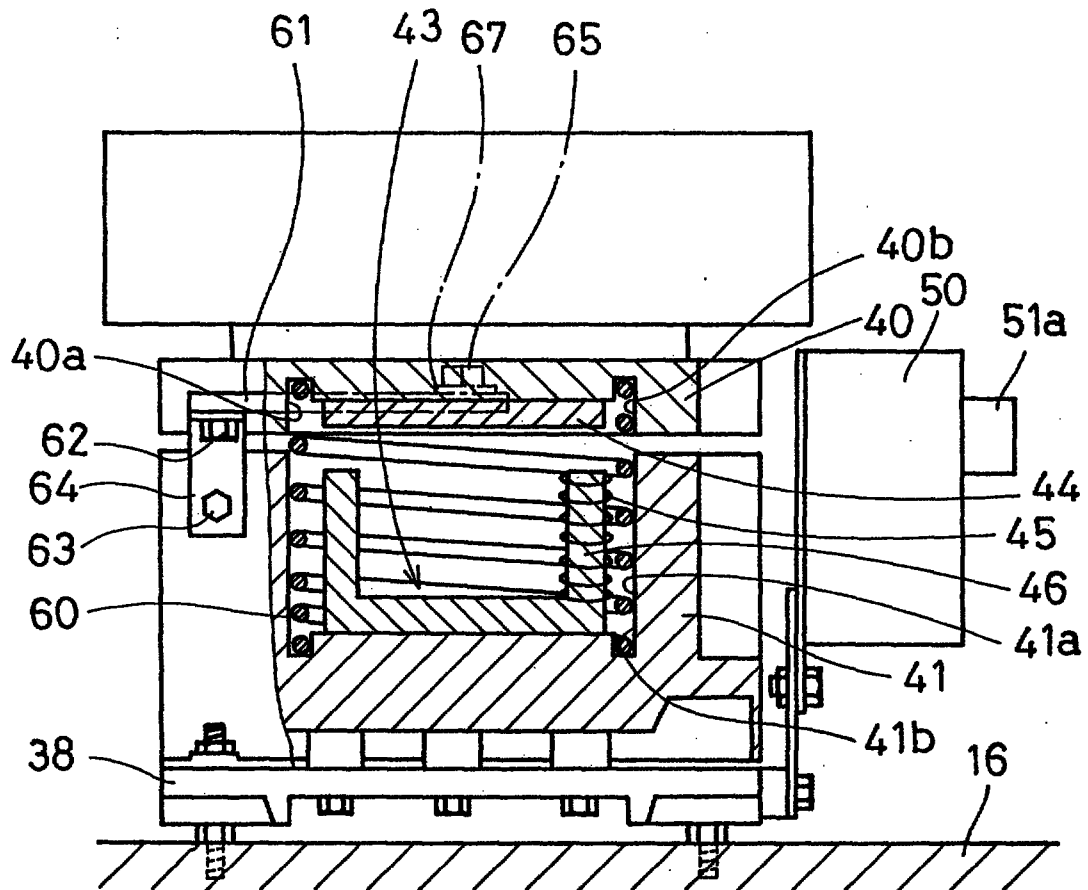

This Sheet Has Been Replaced




FIG 15

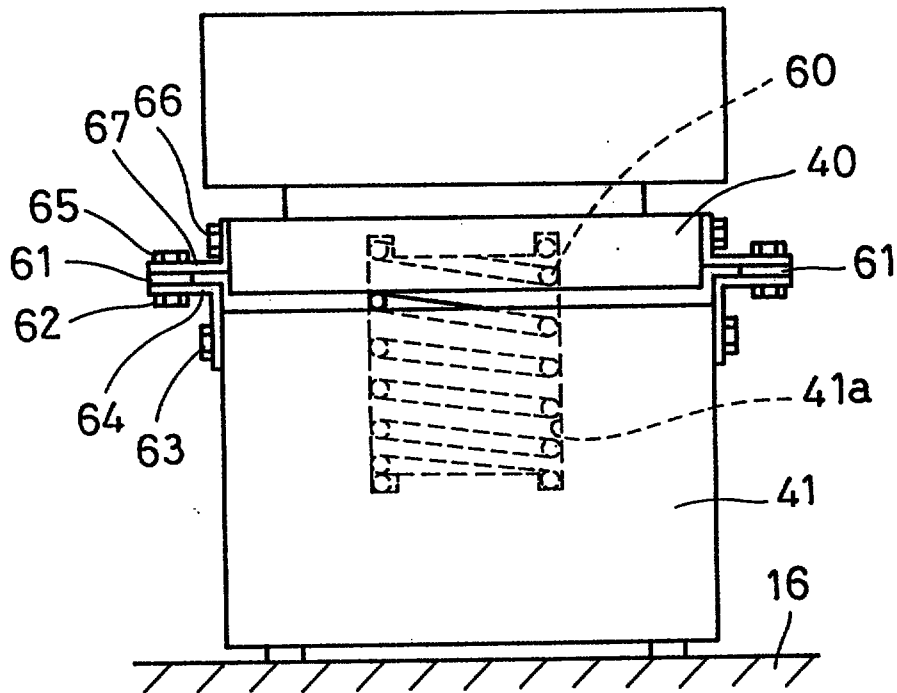

This Sheet Has Been Replaced



FIG 16

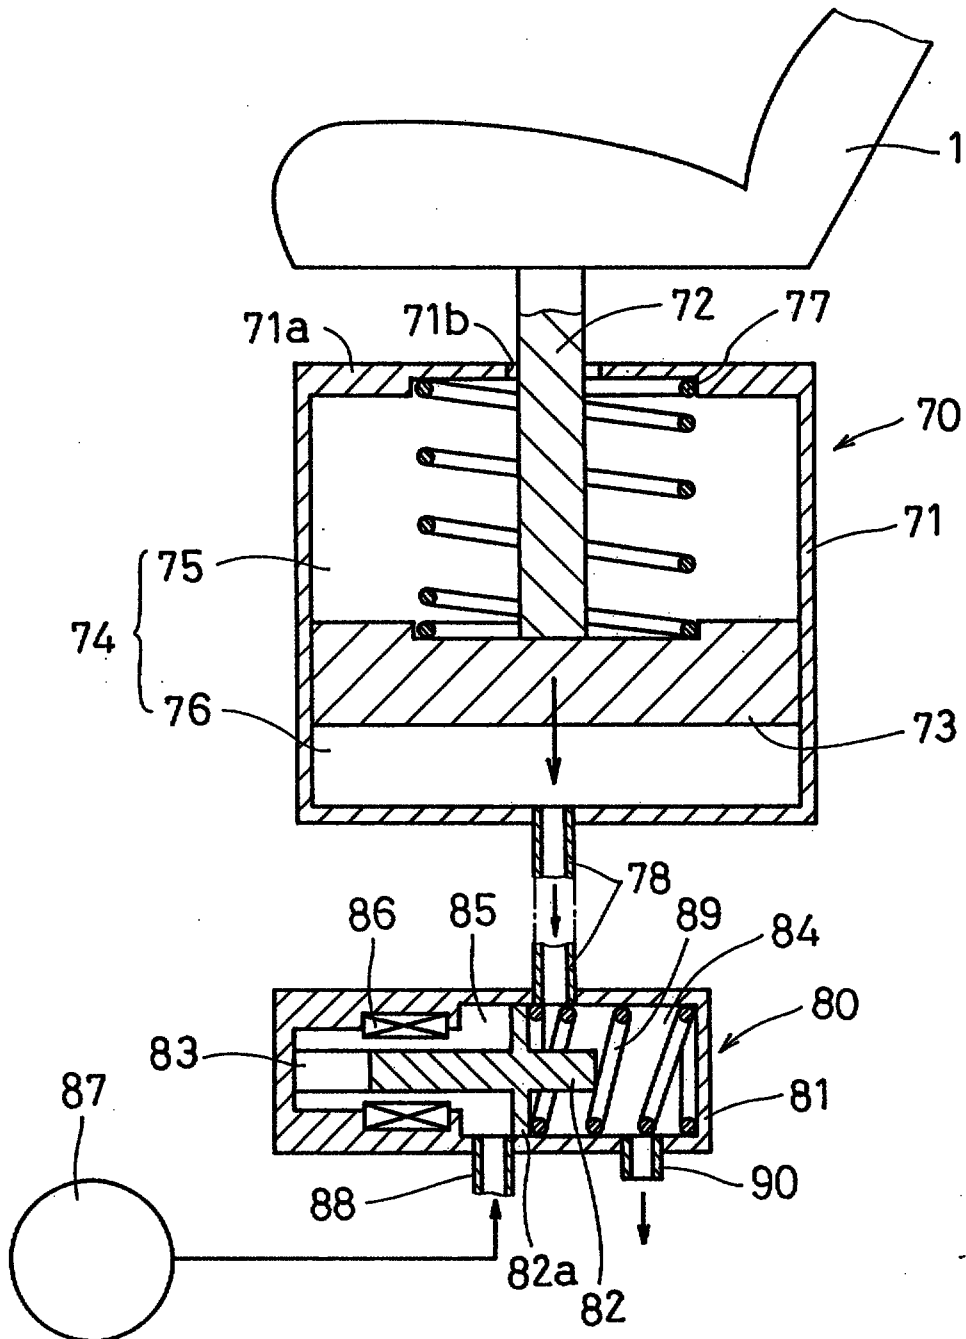

This Sheet Has Been Replaced



FIG 17

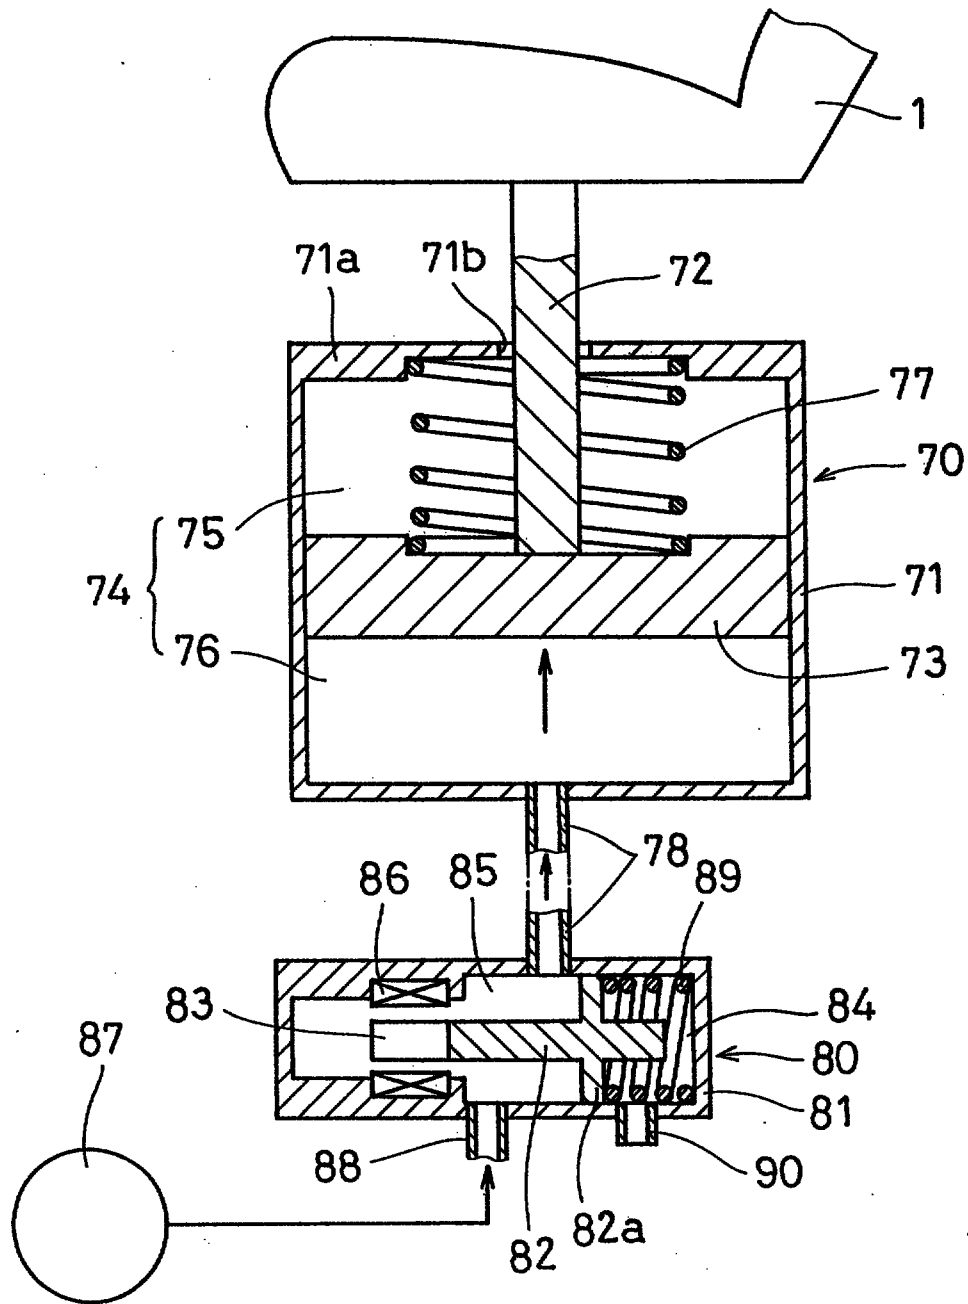


FIG 18

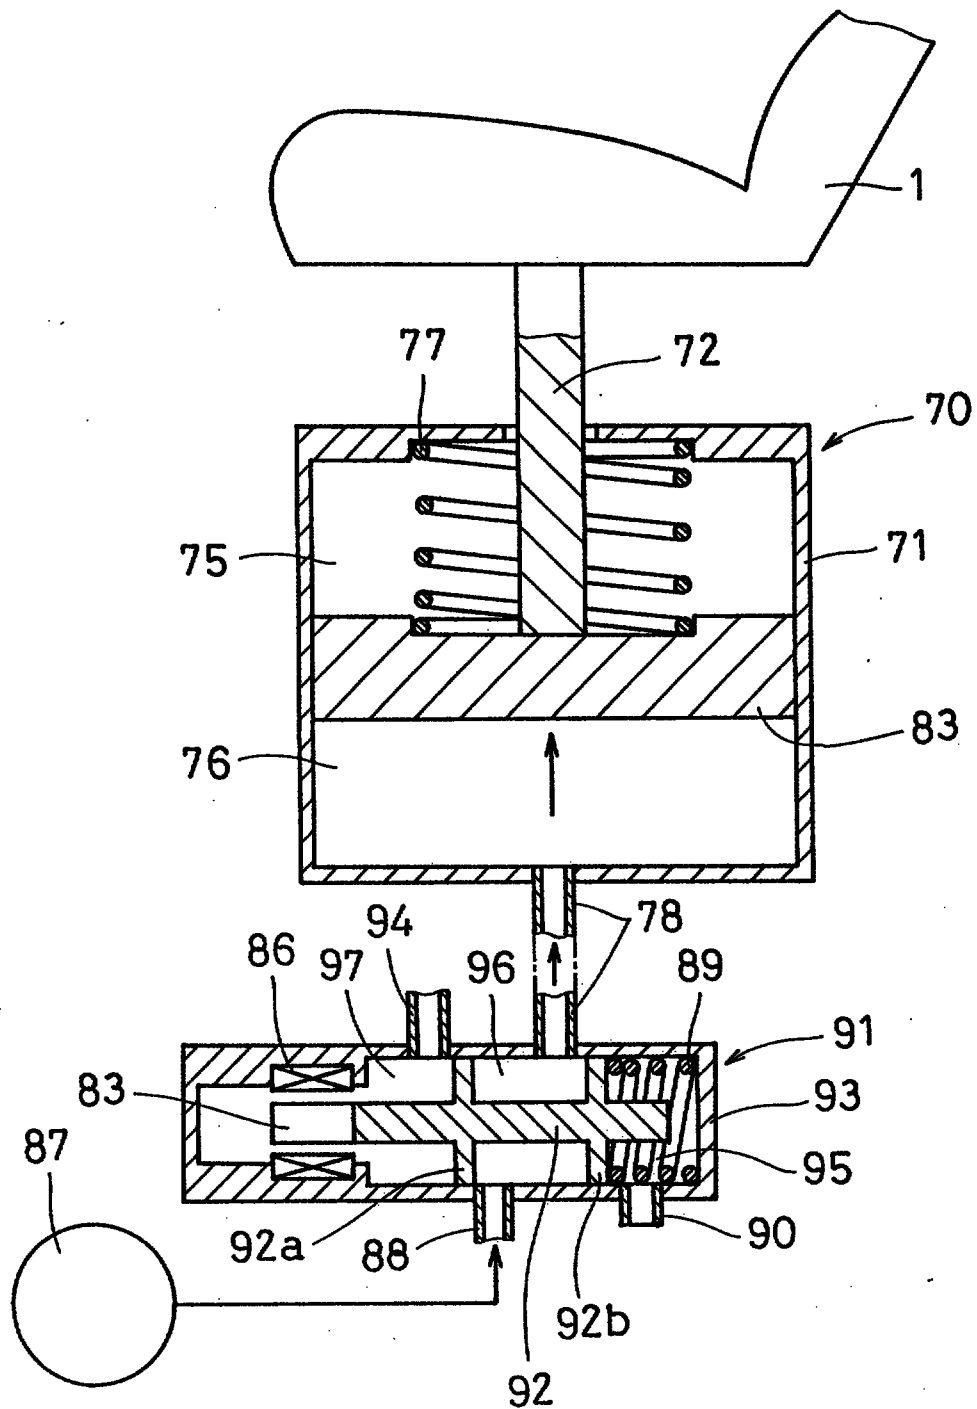


FIG 19


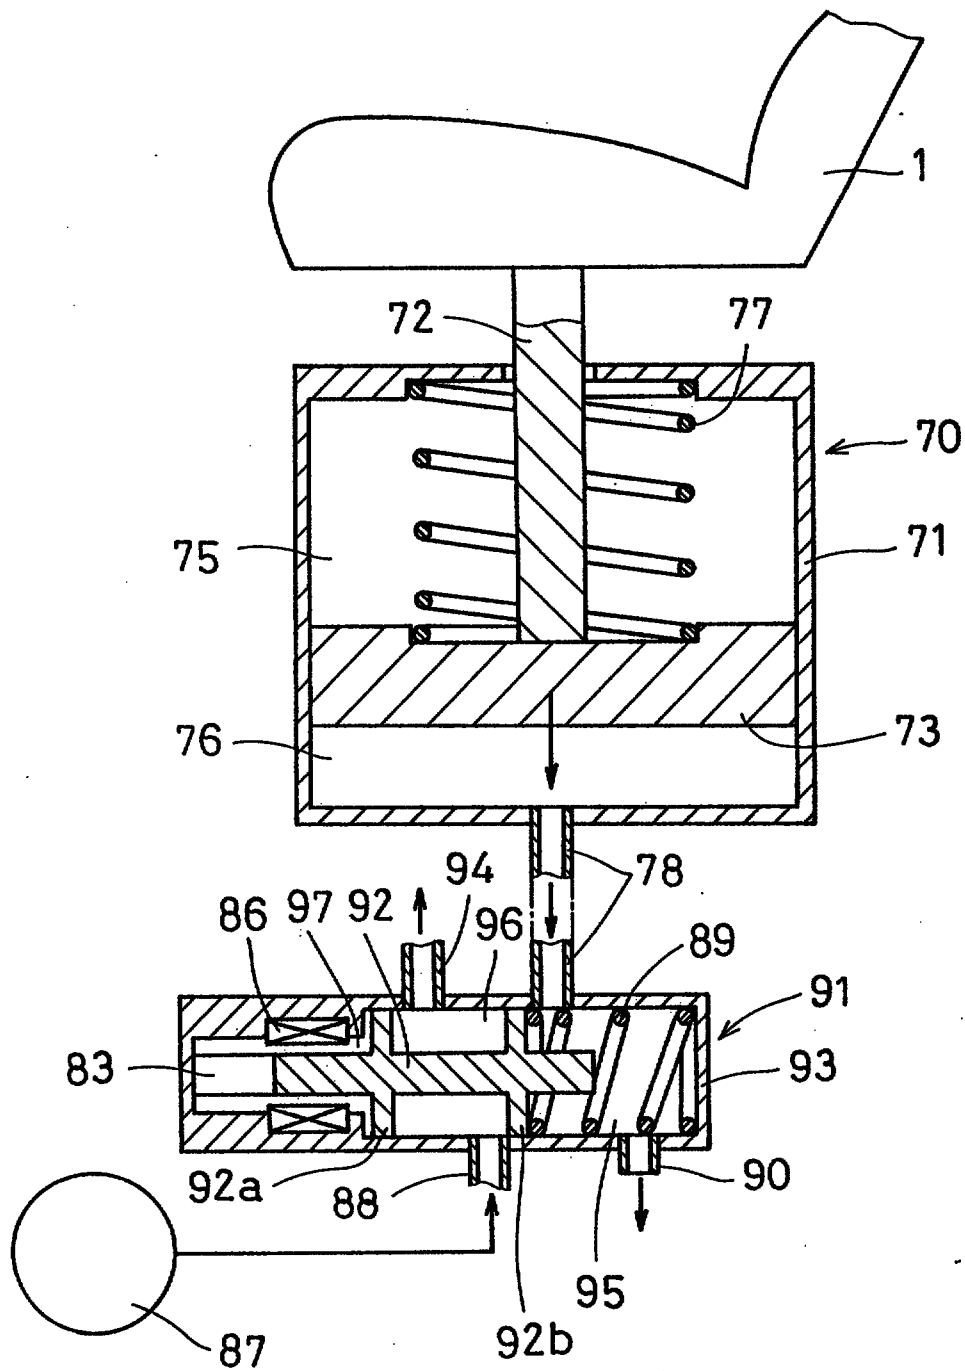


FIG 20

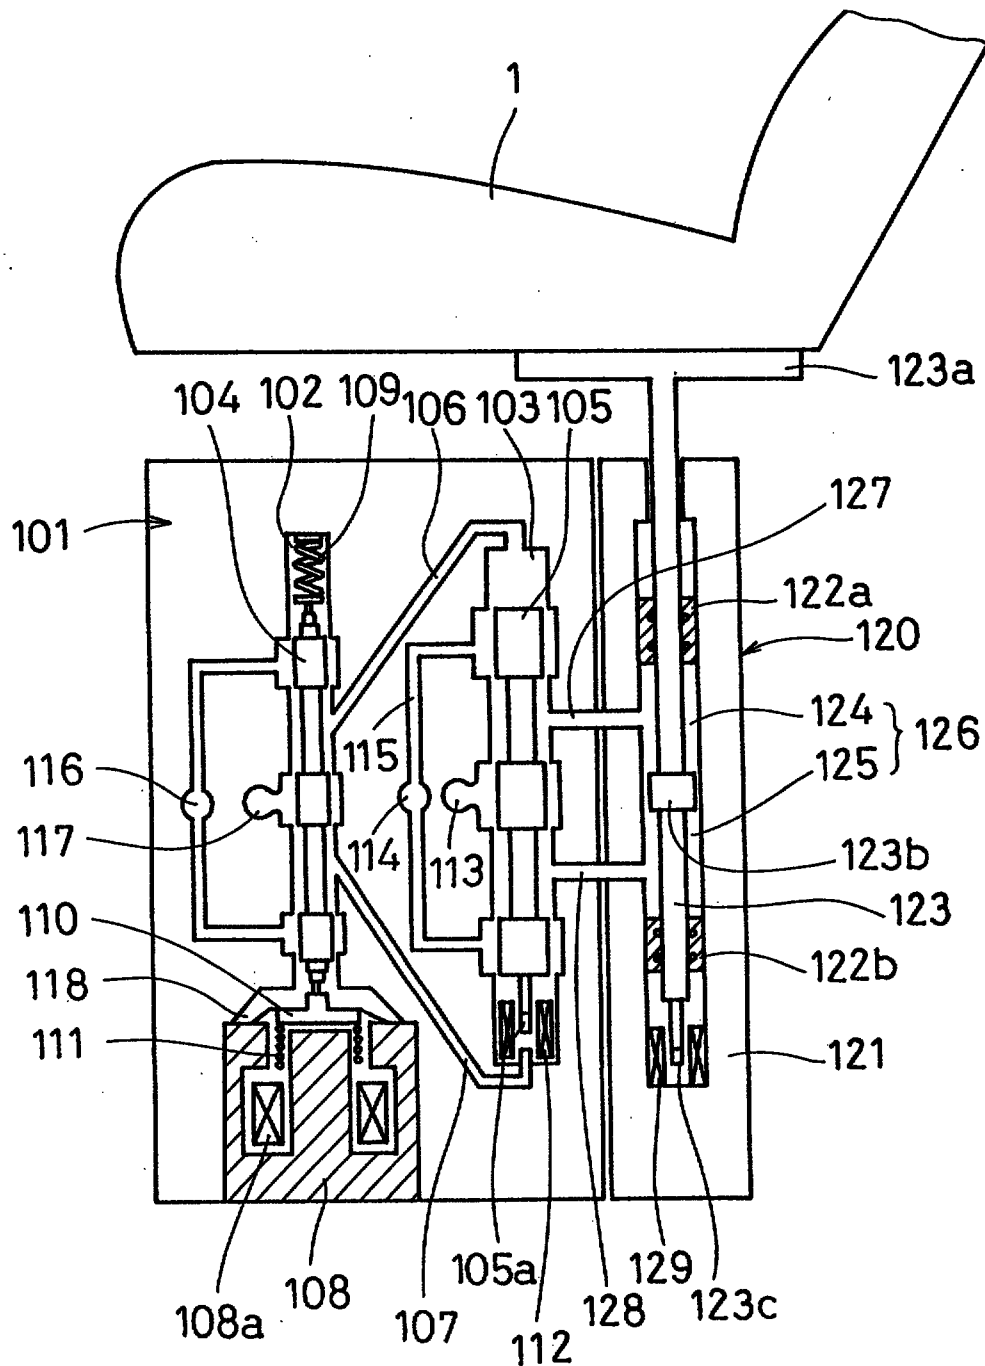

This Sheet Has Been Replaced



FIG 21


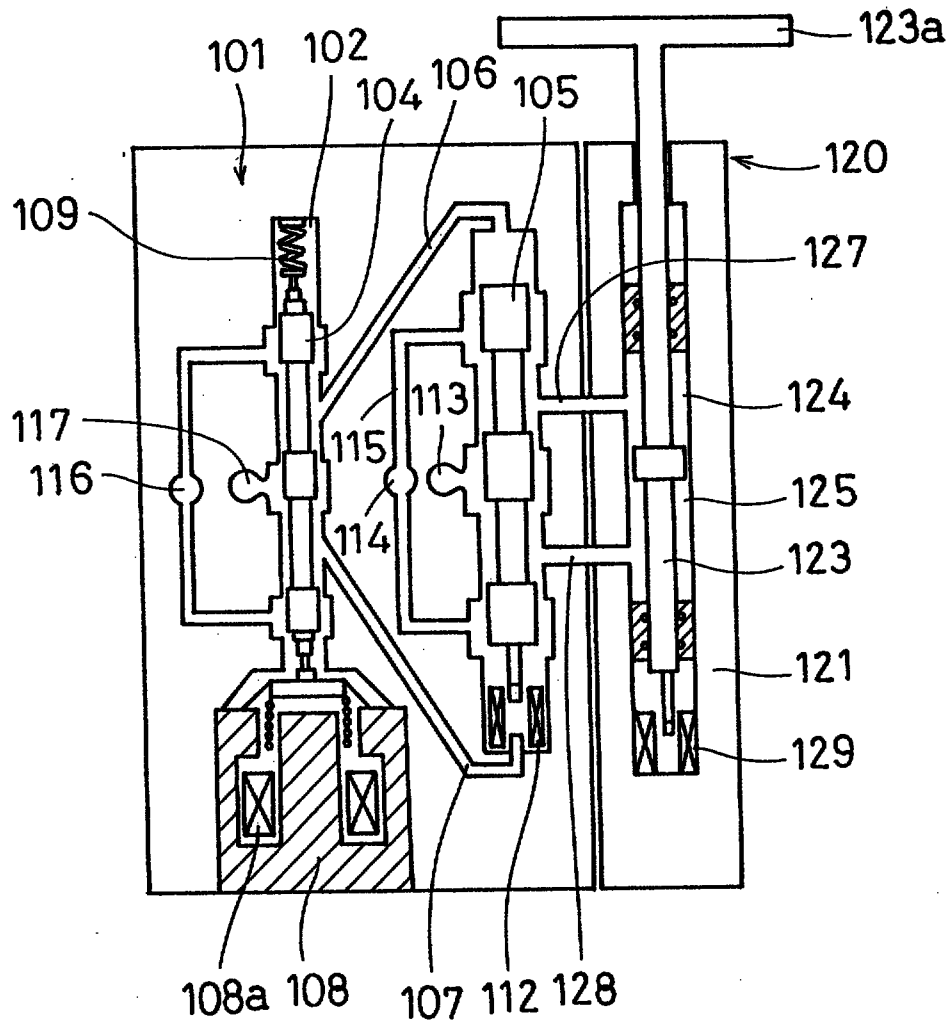


FIG 22



This Sheet Has Been Replaced

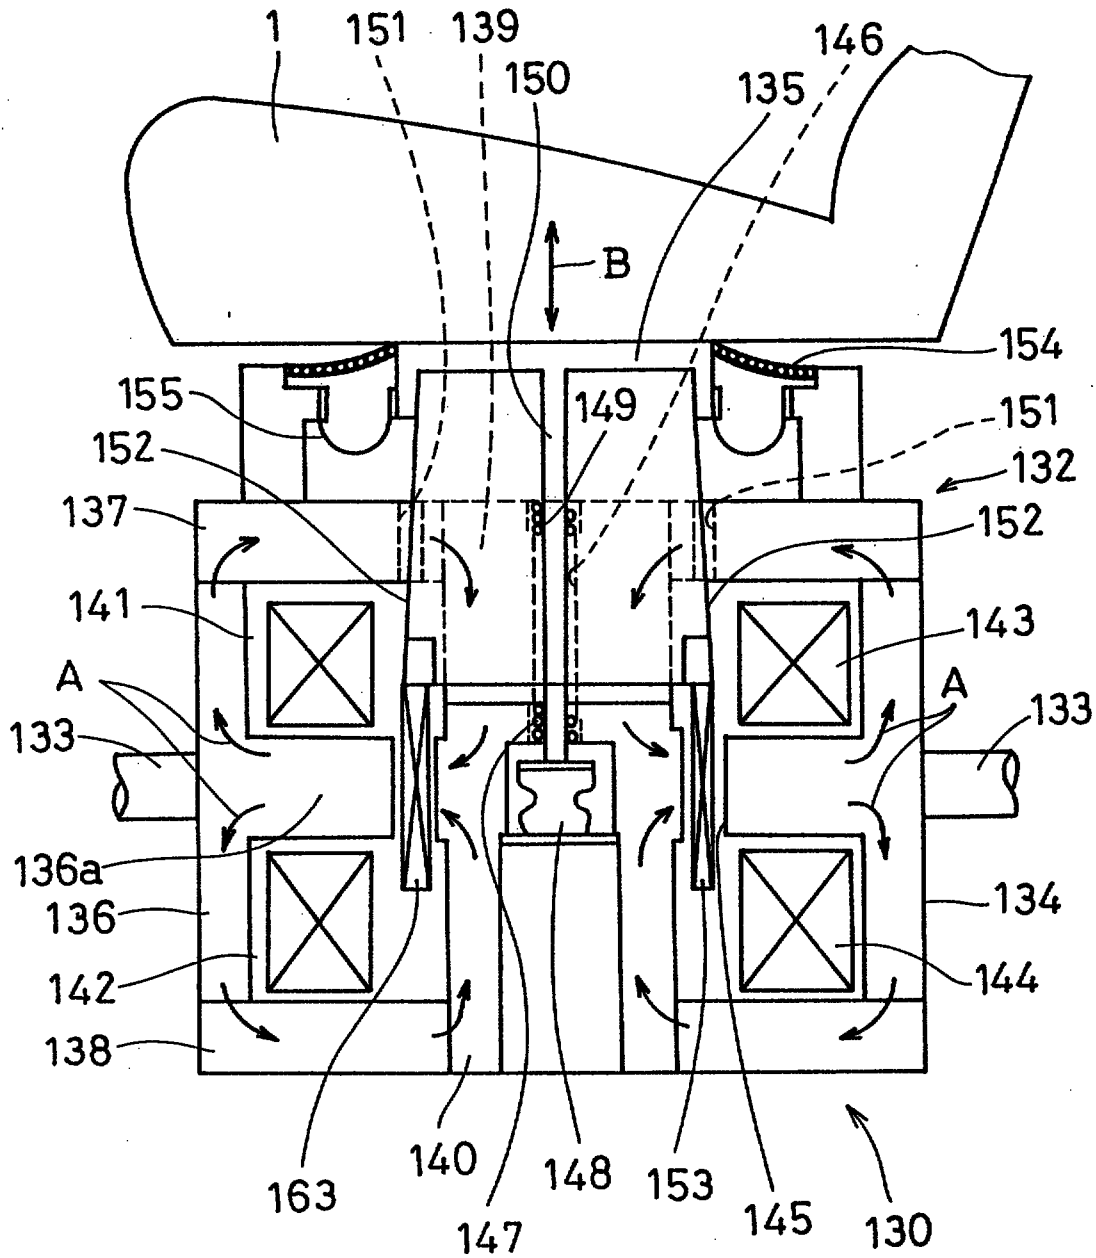

VIBRATILE DRIVER'S SEAT

The invention relates to a vibratile driver's seat to keep a driver alert and prevent a driver from dozing during driving.

A variety of apparatus have been proposed to keep a driver alert and prevent a driver of automobiles and the like, from dozing during driving. Such apparatus usually comprise a sensor for sensing that a driver has started to doze and means for wakening a driver by receiving a signal from the sensor. For example, there is a sensor which senses that a driver has started to doze by sensing the number of times the driver nods per unit time or the time for leaning one's head forward, and the like, because a driver nods when the driver starts to doze, and sends a signal to means for alerting the driver. Also, there are means for alerting a driver which operates by receiving the signal, and alerting the driver by producing a loud sound in the driver's ear or ears. Therefore, according to this apparatus, if a driver starts to doze, the sensor senses that the driver's head is leaning forward, and actuates the means for alerting or wakening the driver.

However, because the above mentioned apparatus operates only after a driver has started to doze off, the driver may lose

concentration, due to drowsiness, when the driver has started to doze, to such a degree that the means for alerting and wakening the driver may not be effective.

Accordingly, the present invention can provide apparatus for preventing a driver from dozing off by vibrating the seat.

The present invention provides a vibratile driver's seat and means for vibrating such driver's seat and means for controlling the on-off of such means for vibrating the driver's seat.

As a result of a series of studies of apparatus to effectively prevent dozing during driving, the inventors have discovered that it is too late to prevent accidents when a driver is waken through a sensor that senses a driver has started to doze. The inventor has discovered that, if a driver's seat is always being vibrated, the driver remains alert, does not doze off and, as a result, traffic accidents caused by dozing during driving can be completely prevented.

The invention will be more fully described and will be better understood from the following description, taken with the appended drawings, in which:

Fig. 1 is a side view of one embodiment of the present invention;

Fig. 2 is a top plan view of the apparatus of Fig. 1 with the driver's seat removed;

Fig. 3 is a side schematic view of an automobile incorporating the invention of Fig. 1;

Fig. 4 is a vertical sectional view of the vibrator of the one embodiment;

Fig. 5 is an enlarged view, partly in section, of the apparatus of Fig. 1;

Fig. 6 is a top view of the driver's seat and the control panel for control of the apparatus of Fig. 1;

Fig. 7 is a rear view of the apparatus of Fig. 6;

Fig. 8 is a side view, similar to Fig. 1, but showing another embodiment of the invention;

Fig. 9 is a front view, partly in section, of the vibrator arrangement of the embodiment of Fig. 8;

Fig. 10 is a side view, similar to Fig. 8, but showing a still further embodiment of the invention;

Fig. 11 is a front view, partly in section of the embodiment of Fig. 10;

Fig. 12 is a side view, similar to Fig. 10, showing yet another embodiment;

Fig. 13 is a rear view of the embodiment in Fig. 12;

Fig. 14 is a side view, partly in section, of still yet another embodiment;

Fig. 15 is a rear view of the embodiment of Fig. 14;

Fig. 16 is a side view, partly in section, of still a further embodiment, of the invention;

Fig. 17 is a side view, partly in section, of the embodiment of Fig. 16, with the apparatus in a different position;

Fig. 18 is a side view, partly in section, of a further still embodiment, similar to Fig. 16;

Fig. 19 is a side view of the apparatus of Fig. 18 with such apparatus in a different position;

Fig. 20 is a side view, partly in section, of still another embodiment of the invention;

Fig. 21 is a side view, similar to Fig. 20, but with the apparatus in a different position; and

Fig. 22 is a side diagrammatic view, of a still further embodiment of the apparatus of the invention.

The following are detailed descriptions of the various embodiments.

Figure 1 shows a side view of the first embodiment of the invention, has a structure for vibrating a driver's seat 1 by a motor 10 installed on the underside of the driver's seat wherein the vibration is transmitted to the driver's seat 1 when vibration motor 10 is activated. Driver's seat 1 is mounted on base 2 and, as best shown in Figure 2, is attached to base 2 by angle fasteners 3 shaped like an L, and which face each other, at a position toward the front and a rear end of base 2. Stationary plates 1a, are fixed, by bolts 4, on the radial outward slants of said support

Date 07 AUG 1996

boards 3 at the front end and the rear end of the base of seat 1. The other side of support boards 3 are welded on the upper side of base 2. Vibration motor 10 is fixed with bolts 5 on the underside of base 2. Rotation axis 10a of vibration motor 10, extends horizontal in right and left direction, as viewed from the front of the driver's seat 1 and from the front of automobile 15 shown in Figure 3. As shown in Figure 4, eccentric loads 13, comprising fixed load 13a and an adjustable load 10, are installed on opposite ends 10b of rotation axis 10a; the direction of rotation being indicated by an arrow in Figure 1 of vibration motor 10. The centrifugal force caused by eccentric loads 13, rotating at the opposite ends of rotation axis 10a, causes base 2, and seat 1 mounted thereon, to vibrate. In Figure 4, 10c is a stator core and 10d is a rotor core of vibration motor 10 which is an electric motor.

Base 2, supporting seat 1 is elastically supported by its corner, Fig. 2, on bed 6. Bed 6 is fixed on the floor 16 of an automobile 15, Fig. 3. Hollow rectangular barrel frames 7, Figs. 1 and 2, comprising of frame bodies 7a and 7b, Fig. 5, are welded together on the front and rear on the upperside of bed 6, and spring supports 8 are installed on the right and left, Fig. 1 and 5, front and rear, Fig. 2, of the upperside of rectangular barrel frames 7. Spring supports 8 each comprise a disc type bottom parts 8a, support parts 8b installed on the middle of the upperside of disc type bottom parts 8a, and passenger 8c penetrating both bottom parts 8a and support parts 8b. Bottom parts 8a are fixed on the

Date 07 AUG 1996

upperside of rectangular barrels 7 with screws 9. Support parts 8b are engaged, from the outside, with springs 11. Bolts 12 are inserted through each passage 8c. Each bolt 12 is inserted from the upperside into each bolt hole 2a, on base seat 2. The nut screw part of each bolt 12 is fixed such as by welding on the ceiling of each rectangular barrel 7 before the frame bodies 7a, 7b are welded. Thus, the underside of the base 2 for installation of seat 1 is elastically suspended on the upper end of springs 11.

In an automobile 15, Fig. 3, as shown in Figures 6 and 7, a controller console panel 14 is set up on the right side, facing forward, of the driver's seat 1. On console panel 14, power-on switch 14a, power-off switch 14b, operation switch 14c, frequency handle 14d, enabling the speed and the number of vibration frequency of vibration motor 10 to be varied and set at a desired frequency, and a timer 14e, for setting timer for start-up and stopping of vibration motor 10 and seat vibration caused thereby, are arranged. Controller console panel 14 also contains an inverter (not shown) so that an electric current from a battery 17 installed in the front part of an automobile 15 is converted into alternating current for supply to the vibration motor 10. In this first embodiment, the apparatus can provide the driver's seat, whose maximum unload is 100 kgs., with 20 Hz in the number of vibration frequency and 15 mm of the amplitude of the vibration for vibrating the driver's seat 1 up-down and back-forth.

When the driver feels drowsiness coming on the driver can turn on power-on-switch 14a and then turn on operation-switch 14c so

07 AUG 1996

that vibration motor 10 operates, generates vibration and such vibration is transmitted through base 2 to driver's seat 1 through support boards 3 and stationary plate 1a to driver's seat 1 and driver's seat 1 vibrates on springs 11. The vibrating driver seat 1 keep the driver alert and wards off dozing during driving.

In Figs. 8 and 9, a modification of the embodiment of Figs. 1-7 is shown and will now be described. In this second embodiment, a pulley 26 is set up on the underside of the base 2. Vibration motor 10 is fixed by bolts 23 on the underside seat base 2 and pulley base 22. Rubber vibration insulators 24, covering bolts 23 are fixed between the upperside of support 10b of vibration motor 10 and the underside of pulley base 22. Rotation shaft 25, on which pulley 26 is mounted, is installed horizontally between left wall 22a and right wall 22b of pulley base 22, under driver's seat 1 and is connected by belt 21 to pulley 20 mounted on rotation shaft 10a vibration motor 10. Support parts 27, Fig. 8, are set up on the bed 6, whereby the driver's seat is elastically suspended through rubber vibration insulators 28. Parts, except for those described above, are the same as those in the first embodiment and the same numbering is adopted. In Figure 9, 29 and 30 are bearings.

According to this second embodiment, vibration generated by vibration motor 10 is transmitted mainly through pulley 20 near on shaft 10a of motor 10 and belt 21 to the pulley 26 near to the driver's seat 1 and, furthermore, from pulley 26 under seat base 2,

through rotation shaft 25 to the base 2 for the driver's seat 1, and so on.

Rubber vibration insulators 24 on the part receiving pulley 22, receiving vibration motor 10, reduce troubles caused by vibration.

Figs. 10 and 11 show a third embodiment of the invention similar to the first and second embodiments. In such third embodiment, a motor 32 is installed on the underside of the part receiving the pulley 22 and an eccentric load 34 is fixed on rotation shaft 33 supported for rotation on walls 22a (left) and 22b (right) of pulley base 22. The other parts in the embodiment are the same as those of the second embodiment and the same numbering is adopted.

According to this third embodiment, when the rotation of the motor 32a is transmitted through rotation shaft 32a of motor 32, pulley 20 and belt 21 to pulley 26 and rotation shaft 33, eccentric load 34 on rotation shaft 33 vibrates and such vibration is transmitted to base 2 of driver's seat 1. In this third embodiment, motor 32, itself, does not vibrate and the durability of the motor 32 is drastically improved.

In the above first through third embodiments, the rotational axes of the vibration motor and pulley shafts extend transverse the direction of travel of the vehicle 15, Fig. 3. However, this is not intended as limiting in scope and also each of them can be installed in the same direction as the direction of travel of the vehicle 15.

Also, in the above first through third embodiments, a bed 6 is fixed on the floor 16 of vehicle 15. This, also is intended not as limiting in scope and the base 6 may be fixed on the floor 16 slidably in back-forth directions.

Figs. 12 and 23 show a fourth embodiment of the invention. In such fourth embodiment, a U-shaped flat spring 42 is installed between a driver's seat 1 and a base 38 and an electro-magnet 43 is connected to one of the ends 42a and 42b of the flat spring 42, while a permanent magnet 44 is connected to the other of the end 42a and 42b. Vibration of spring 42 is generated by sending electrical current into electro-magnet 43 and such vibration is transmitted to the driver's seat 1 so that the driver's seat 1 vibrates. In detail, an upper vibrating body 40 is fixed under the driver's seat 1 and a concave part 40a is formed in the middle on the underside of said vibrating body 40. And also, the lower vibrating body 41 is fixed on the upperside of said base 38 by bolts 47 and a rubber vibration insulator 48, which covers bolts 47, is fixed between the upperside of the base 38 and the underside of lower vibrating body 41. A concave part 41a is formed in the middle on the upperside of vibrating body 41. A U-shaped flat spring 42 is mounted between concave parts 40a and 41a. Height-adjustable bolt 39, is adjustable to fix the height of base 38 on the floor 16 of automobile 15, Fig. 3.

The underside of lower bar 42a of flat spring 42 is welded to the bottom face of concave part 41a of lower vibrating body 41, while the upperside of upper bar 42b of flat spring 42 is welded on

the upperside of concave part 40a of upper vibrating body 40. An electro-magnet 43 having a fixed iron core 46 with coil 45, is fixed on the upperside of lower bar 42a of flat spring 42, while a moving iron core 44 is fixed on the underside of the upper bar 42b. Support board 48 is fixed on the side part of lower vibrating part 41 by a bolt 49. Controller 50 is fixed on support board 48 by a bolt 51. Controller 50 contains an inverter, same as in the above Example 1, and also electric current adjustable handle 51a, and the like, and controlling alternating current supplied to coil 11, are installed on console panel set up in the rear side of controller 50.

As shown in Figure 13, lower vibrating body 41 and upper vibrating body 40 are connected, at opposite right and left sides, by flat spring 52. Thus, the upper part of flat spring 52 is fixed on the upper stay 55, fixed on said upper vibrating body 40 by bolts 54, while the lower part of flat spring 52 is fixed on the lower stay 58, fixed on the lower vibrating body 41 by bolts 57. In such a fixed state, flat spring 52 is tilted toward the rear, as shown in a chain line of Figure 12, so that it works to set resonance frequency. In the third embodiment, 100 kgs. for a seat maximum load, 20Hz for number of vibration frequency and 15mm vibration for amplitude (vertical vibration of the driver's seat 1 such that its vibration is a little tilted backward direction) are given to the driver's seat 1.

In the fourth embodiment, if a driver feels drowsiness coming on, the driver can turn on power-on switch and then operate an

electric current adjustable handle 51a, installed on a console panel, so that suitable alternating current is sent to a coil 45 of electro-magnet 43. Because magnetic flux is generated on fixed iron core 46 of the electro-magnet 43, moving iron core 44 is attracted toward fixed iron core 46 and the rear part of upper vibration body 40 is tilted downward. When the alternating current becomes zero, the attracting force becomes zero and at the moving iron core 44 is returned to the original position by elastic stress of flat spring 42. In addition, both flat springs 42 installed between opposite sides of lower vibrating body 41 (left) and said upper vibrating body 40 (right) establish resonance frequency trailing the movement of upper vibration body 40. Thus, lower vibrating body 41 and upper vibrating body 40 vibrate vertically (in a direction tilted backward a little), and such vibration is transmitted, through upper vibrating body 40, to the driver's seat 1. A driver seated in the driver's seat 1 is kept alert by the vibration of the driver's seat and is not liable to doze off during driving.

Fig. 14 and 15 show a fifth embodiment. In the fifth embodiment, a groove 41b is formed on the bottom face of the concave part 41a of lower vibration body 41 and the lower end of compression coil spring 60 is positioned in groove 41b and fixed. Groove 40b is formed on the upperside of the concave part 40a of upper vibration body 40, and the upper end of said compression coil spring 60 is positioned in groove 40b and fixed. Electro-magnet 43 is fixed on the bottom face of concave part 41a of lower vibration

body 41 inside of compression coil spring 60. Moving iron core 44 is fixed on the upperside of the concave part 40a of the lower vibration body 40 inside the compression coil spring 60. As shown in Figure 15, lower vibration body 41 and upper vibration body 40 are connected with flat spring 61 at its opposite right and left ends of body 41. One end of flat spring 61 is fixed by a bolt 65 on a lower stay 64 fixed on lower vibration body 41 by a bolt 63, while the other end is fixed on the upper stay 67, fixed on upper vibration body 40 by bolt 66. Flat spring 61, in such a fixed state and in a horizontal position, as shown by a chain line of Figure 14, operates so as to set resonance frequency. In this fifth embodiment, mainly, a vertical vibration is given to the driver's seat. The other parts, except for the above, are the same as those of the fourth embodiment and the same numbering is adopted.

In the above fourth and fifth embodiments, electro-magnet 43 is used for the lower vibration body 41 and a moving iron core 44 is used for the upper vibration body 40. This, however, is intended not as limiting in scope and it is possible that electro-magnet 44 is used for the upper vibration body 40 and a moving iron core 44 can be used for the lower vibration body 41.

In the sixth embodiment of Fig. 16, a pneumatic cylinder vibrates driver's seat 1. A pneumatic cylinder 70, having an upper wall 71a, has a rod 72 passing through in rod hole 71b, formed on the middle part of an upperside 71a of cylinder body 71. The driver's seat 1 is fixed on the upper end of rod 72, while piston

73 is fixed on the lower end. Piston 73 is slidable, vertically, in cylinder chamber 74, the piston dividing cylinder chamber 74 into an upper chamber 75 and a lower chamber 76. A spring 77 is arranged between the concave part of the upper side 71a of cylinder body 71 and the concave part of the upperside of the piston 73, and piston 73 is pressed downward by energy of piston 73. A line 78 is extended from lower chamber 76 and connected to a channel control valve 80.

In channel control valve 80, a valve rod 82 is arranged slidably inside a casing 81 and an iron core, or permanent magnet 83, is installed at the left end of the valve rod 82. A maximum diameter part 82a is formed in valve rod 82, dividing the casing 81 into two parts, a right chamber 84 and a left chamber 85. Electro-magnet 86 is fixed on a part of the housing of control valve 80 to the right from the left end by a definite distance on the chamber 85, while air-supply line 88, extended from a compressor 87, is connected to chamber 85. Spring 89 is positioned in right chamber 84 and valve rod 82 is pressed toward the left, Fig. 16, by energy of the spring 89. A passage 90 to atmosphere, leads from right chamber 84.

Electro-magnet 86 is electrically connected, through an inverter, with a battery 17 of an automobile 15 such as in the fourth embodiment. And an on-off switch for vibration, which controls the supply of electricity to electro-magnet 86, is arranged on a console panel 18 of an automobile 15, Fig. 3. When

the switch for vibration is pushed, the electro-magnet 86 is charged with alternating current.

In this embodiment, as shown in Fig. 16, in normal condition the vibration switch is not pushed and electro-magnet 86 is not charged with electricity and magnetic force is not generated in the electro-magnet 86. The valve rod 82 is pushed to the left by elastic energy of spring 89 and contacts the leftside of a casing 81, wherein the maximum diameter part 82a of valve rod 82 is positioned between the connected line 78 and air supply line 88. Thereby, connected line 78 and atmosphere passage 90 are connected through the right chamber 84, while the communication of a line 78 and air supply line 88 are cut off by the maximum diameter part 82a. Therefore, the air of lower chamber 76 is connected to the atmosphere so that piston 73 is pressed downward to downside of the cylinder 71 by elastic energy of the spring 89 and the driver's seat 1 is supported by the upper wall 71a of cylinder body 71. In this case, the air from a compressor body 87 is released to the atmosphere outside by the compressor body 87, itself, or means for releasing air, which is arranged in the air supply line 88 (not shown in Figures).

When a driver feels drowsiness coming on during driving and the driver pushes on a switch for vibration, electro-magnet 86 is not charged with alternating electricity. At that time, magnetic force is generated in said electro-magnet intermittently in a short pitch, wherein iron core 83 is attracted toward the position where electro-magnet 86 is installed, that is toward the right, Fig. 16.

Therefore, the valve rod 82 moves against elastic force of the spring 89, and, as shown in Figure 17, the communication of the line 78 and the passage to atmosphere 90 is cut off by maximum diameter part 82a and line 78 and the passage to air supply line 88 are connected through chamber 85. Air, at air pressure of 3 - 5kgs) is force-fed from compressor 87 into a lower chamber 76. Piston 73 (the area receiving the pressure is 20cm^2) rises and the driver's seat 1 rises together. In the condition that magnetic force is not generated in electro-magnet 86, as mentioned in the above, because line 78 and the passage to atmosphere 90 are connected, the air in the lower chamber 76 is connected with the outside atmosphere, Fig. 16, the piston 73 is pressed downward by the energy of the spring 77 and also the driver's seat lowers. The raising and lowering of the driver's seat 1, like this repeats while the switch for vibration is pressed. In this way, if a driver feels drowsiness, the driver can vibrate the driver's seat 1 by repeating rise and fall of such driver's seat by operating the switch for vibration installed in the control panel 18. Therefore, the driver remains alert, does not doze off during driving, and traffic accidents caused by dozing during driving can be prevented.

In the seventh embodiment of the invention shown in Fig. 18, means for releasing air from compressor 87 into the atmosphere outside is installed in the channel control valve 91. This means that in the channel control valve 91 of this embodiment, as shown in Figure 18, the maximum diameter parts of 92a and 92b of valve rod 92, are formed at the definite distance between them in the

valve rod 92, whereby the casing 93 is divided, respectively, into a right chamber 95, a middle chamber 96 and a left chamber 97. Also, a line for releasing force feed air 94 is arranged in the casing 93, whose end opens to the outside of the automobile through a hole (not shown in Figures) formed in the floor 16 of the automobile 15, Fig. 3, into the atmosphere outside. The other parts, except for these parts, are the same as those of the above Example 6 and the same numbering is adopted.

According to the seventh embodiment, the connected line 78 and the air supply line 88 are connected through the middle chamber 96 when magnetic force is generated in electro-magnet 86, as shown in Figure 18. The connected line 78 and the line for the passage to the atmosphere 90 are connected through the right chamber 95, while the air supply line 88 and the line for releasing force feed air 99 are connected through the middle chamber 96, when magnetic force is not generated in electro-magnet 86, as shown in Figure 19. Thereby, when the compressor 87 is driving, the air pressed by compressor 87 is not sent to the lower chamber 76 of the cylinder chamber 74 so that the air can be discharged to outside of the automobile.

In the embodiments, the combination of the valve rod 82 (92) combined with the spring 89 are adopted for the channel control valve 80 and 91. However, a rotary valve type is also acceptable.

In the eighth embodiment of Fig. 20, the driver's seat 1 is vibrated by a hydraulic cylinder. In detail, in hydraulic cylinder 120, a T-shaped piston rod 123 slides vertically. The driver's

seat is fixed on a supporting part of the seat 123a formed at the upper end of piston rod 123. The cylinder chamber has a pressure chamber 126 formed between upper and lower hydraulic packings 122a and 122b, respectively. Pressured chamber 126 is divided into an upper pressure chamber 124 and a lower pressure chamber 125 by a maximum diameter part 123b formed on piston rod 123.

In servo valve 101, pilot stage 102 and power stage 103 are formed, and first valve rod 104 is arranged vertical-sliding-freely in the pilot stage 102, while the second valve rod 105 is arranged vertical-sliding-freely in the power stage 103. Pilot stage 102 is connected through fifth line 106 to an upper part of power stage 103, and through sixth line 107 to a lower part of power stage 103. Power stage 102 is connected through the first line 127 to an upper pressure chamber 124 of the cylinder chamber and through the second line 128 to a lower pressure chamber 125, through third line 113 to a hydraulic pump, not shown, and through fourth line 115 to first line for returning oil, respectively. A vibration generator, by dynamic electricity 108, is arranged under pilot stage 102. Coil 108a is positioned inside its vibration generator by dynamic electricity 108 while controlled body 110 is energized, upward, by a spring 109 in the upper part of the vibration generator. Coil 108a is, as in the fourth embodiment, electrically connected through an inverter with the battery 17 of the automobile 15, Fig. 3. Electricity supplied from the inverter to the coil 108a is converted into alternating current. An on-off switch, not shown, controls electric supply to coil 108a and is installed in the

control panel 18, so that the controlled body 110 can be controlled vertical-sliding-freely by sending alternating current to coil 108a. Controlled body 110 contacts first valve rod 104. The first valve rod 104 is energized upward, and also energized upward by an extension spring 111 fixed on the upper part of the pilot stage 102. The first displacement transducer 112, which detects a displacement in the lower part 105a of the second valve rod 105, is installed in the lower part of the power stage 103. The detection signal is sent to the vibration generator by dynamic electricity 108 as feedback. On the other hand, the second displacement transducer 129, which detects displacement in the lower part 123b of piston rod 123, is installed in the lower part of cylinder chamber 126. Such detection signal is sent to the vibration generator by dynamic electricity 108 as feedback. In Figure 20, 116 is the second line for returning oil 117 is the seventh line connected with the hydraulic pump and 118 is a diaphragm, which are installed in the oil tight condition, on the controlled body 110 and the vibration generator by dynamic electricity 108.

In the above structure, when alternating current is sent to the coil 108a of the vibration generator by dynamic electricity 108 so that the controlled body is moved upward, as shown in Figure 21, the first valve rod 104 moves upward and the seventh line 117 is connected with the sixth line 107 so that oil force fed by the hydraulic pump is supplied from the lower end of the power stage 103 to inside the power stage 103. At that time, the second line for returning oil 116 and the fifth line 106 are connected so that

oil is returned from the upper end of the power stage 103 to a tank (not shown in Figures). Thereby, the second valve rod 105 moves upward and, as a result, the third line 113 is connected with the second line 128 so that the oil from the hydraulic pump is supplied to the lower pressure chamber 125. The first line for returning oil 114 and the first line 127 are connected through the fourth line 115 so that oil is returned from the pressure chamber 124 to the tank. Thereby, piston rod 123 is moved upward and the driver's seat 1 rises. When the controlled body 110 is moved downward, in an opposite reaction against the above, the piston rod 123 is moved downward so that the driver's seat falls. Thus, accompanying with the vertical movement of the controlled body 110, the driver's seat vibrates. In this case, the amount of inflow oil and outflow oil to a lower pressure chamber 125 or an upper pressure chamber 124, changes by the displacement of the first valve rod 104 in the pilot stage 102, so that the piston rod 123 vibrates at a speed in proportion to the oil flow. The detection signals from the first displacement transducer 112 and the second displacement transducer 129 are sent to the vibration generator by dynamic electricity 108 as feedback, which enables precise control.

In the eighth embodiment, if a driver feels drowsiness coming on, the driver can operate switches installed on a control panel such as control panel 14, Fig. 6, whereby alternating current is sent into the coil 108a of vibration generator by dynamic electricity 108 so that a servo valve 101 operates to supply oil from the hydraulic pump to the pressure chambers 124 and 125 of the

hydraulic cylinder 120 and the piston rod 123 moves vertically and the driver is kept alert and traffic accidents will be prevented.

In the ninth embodiment in Fig. 22, the vibration generator, by dynamic electricity 130, is adapted to vibrate the driver's seat 1. In detail, support axes 133 of the vibration generator, by dynamic electricity 130, are extended from opposite sides, at the right and left in horizontal direction, and supported by support base, not shown. And also, in the vibration generator by dynamic electricity 130, a base 135, wherein the driver's seat is fixed, is supported by iron core 134. The iron core 134 has an annular body magnetic pole 136, an annular upper yoke 137 fixed on an upper part of annular body magnetic pole 136, a circular lower yoke 138 fixed on a lower part of body magnetic pole 136, an annular upper center magnetic pole 139 and a lower center magnetic pole 140, arranged concentrically, wherein annular exciting coils 143 and 144 are arranged concentrically in two divided spaces of upper annular chamber 141 and lower annular chamber 142 formed thereby. Both exciting coils 143 and 144 are, like in embodiment four, electrically connected with the battery 17 of the automobile 15, so that the battery supplies direct current to both exciting coils 143 and 144.

An annular cavity 145, connecting the spaces of upper chamber 141 and lower chamber 142, is formed concentrically with exciting coils 143 and 144 in a central annular projecting portion 136a of body magnetic pole 136, while a bore 146 is formed through the center of upper center magnetic pole 139. Linear ball bearing 149

is fixed on the upper part of pit 146. A connecting holes 151, connecting with upper space 141, are formed at regular intervals in upper yoke 137. A hole of small diameter is formed on the upper portion of lower center magnetic pole 140, and a hole of larger diameter is formed under the hole of small diameter. Linear ball bearing 147 is fixed in the small diameter while air spring 148 is positioned in the hole of larger diameter.


Supporting rod 150, which extends downward from the center of the underside of base 135, passes through bore 146 of upper center magnetic pole 139 and the hole of small diameter of lower center magnetic pole 140 and is supported by air spring 148, for free vertical-sliding-movement by linear ball bearings 147 and 149. Connecting piece 152 extends downward through connecting hole 151 on the lower part of base 135, and is connected, through connecting hole 151, with annular driving coil 153. Driving coil 153 is arranged in the cavity concentrically with concentric exciting coils 143 and 144. Driving coil 153 is electrically connected, through an inverter, with battery 17, whereby electricity, supplied to the driving coil 153 is converted into alternating current. An on-off switch, not shown, controls the supply of electricity to driving coil 153 and is arranged in a control panel, such as control panel 14, Fig. 6. In Figure 22, 154 is an air seal and 155 is a loop spring, which works as a baffle.

In the ninth embodiment, when the switch of the control panel is turned on, direct current is charged through exciting coils 143 and 144 and magnetic flux in the direct of arrow A is formed and

alternating current is charged through the driving coil 153 at right angles to the magnetic flux of the direct current in coils 143, 144. According to Fleming's rule, an excitation force works in the B arrow directions, and the driver's seat vibrates. Therefore, if a driver feels drowsiness coming on, the driver can vibrate the driver's seat 1 by turning on the switch, preventing dozing during driving and accidents caused thereby.

EFFECTS OF THE INVENTION.

Thus, according to this invention, a driver's seat having a vibration generator connected to the driver's seat and controls for turning the vibration generator on and off for vibrating the driver's seat so that when a driver feels drowsiness coming on, the driver can operate the controls for switching on-off the vibration generator so that the driver's seat can be vibrated and prevent the driver from dozing during driving and prevent an accident from occurring.

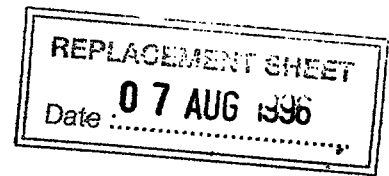

Claims

23

1. A vibratile seat (1) with means for vibrating the seat and means for turning the means for vibrating the seat on and off.
2. A vibratile seat according to claim 1 in which the means for vibrating the seat comprises a vibrating motor (10) connected to the seat.
3. A vibratile seat according to claim 1 in which the means for vibrating the seat (1) comprises a vibrating motor (10) elastically connected to the seat, a power transmission shaft (25) and a belt (21) connecting an output shaft (10a) of the vibrating motor and the power transmission shaft.
4. Means for vibrating a seat (1) comprising a motor (32) elastically connected to the seat (1), a power transmission shaft (33), an eccentric load (34) on the power transmission shaft and a belt (21) connecting an output shaft (32a) of the motor and the power transmission shaft.
5. Means for vibrating a seat (1) comprising a lower vibratile body (41), an upper vibratile body (40) on the lower vibratile body, a U-shaped flat spring (42) connected at one end to the lower vibratile body and at the other end to the upper vibratile body, an electro-magnet (43) on one end (42a) of the flat spring, a magnet (44) on the other end of the spring (42b) and facing the electro-magnet, and means (50) for controlling the energizing of the electro-magnet.
6. Means for vibrating a seat (1) comprising a lower vibratile body (41), an upper vibratile body (40) on the lower vibratile body, a coil spring (60) having a lower part on the lower vibratile body and an upper part on the upper vibratile



body, an electro-magnet (43) on either the lower or upper vibratile body, a magnet (44) on the other vibratile body and facing the electro-magnet and means (50) for controlling the energizing of the electro-magnet.

7. Means for vibrating a seat (1) comprising a rod (72) having one end freely slidable in the chamber (74) of a cylinder (70) and the other end projected outward from the cylinder chamber and connected to the seat, a piston (73) connected to the end of the rod in the chamber, means (78) for supplying pressure fluid to the cylinder chamber, a channel control valve (80) for supplying and discharging the pressure fluid to the chamber and means for controlling the valve for repeated free sliding of the piston.

8. Means for vibrating a seat (1) comprising an iron core (134) located under the seat, a support body (150) for supporting the seat, an elastic body (148) elastically supporting a lower end of the support body and positioned on the iron core, annular spaces (141,142) formed in the upper and lower ends of the iron core, an annular exciting coil (143,144) arranged concentrically in each of the annular spaces, a cavity (145) in each of the exciting coils and connecting the annular spaces, an annular driving coil (153) positioned in the cavity and freely slidable vertically, a bore (146) extending downward from the upperside of the iron core into the upper annular space of the annular space at each end of the iron core, a connecting piece (152) in the bore and the upper annular space and connecting the upper part of the support body (150) and the driving coil and means for supplying direct current to the exciting coils and supplying alternating current to the driving coil so that the driving coil may be vibrated vertically.



REPLACEMENT SHEET

Date **07** AUG. 1996

25

9. A vibratile seat (1) with means for vibrating the seat and means for turning the means for vibrating the seat on and off, in which the means for vibrating the seat is according to any of claims 4 to 8

ABSTRACTVIBRATILE DRIVER'S SEAT

A driver's seat (1) connected to a vibration generator and control means (14) for turning the vibration generator on and off. When a driver begins to feel drowsy he can operate the controls to turn on the vibration generator. The vibrating seat prevents the driver from dozing during driving and may prevent accidents caused by the driver's drowsiness.

Figure 6

07 AUG 1996

Date :

1 / 22

FIG 1



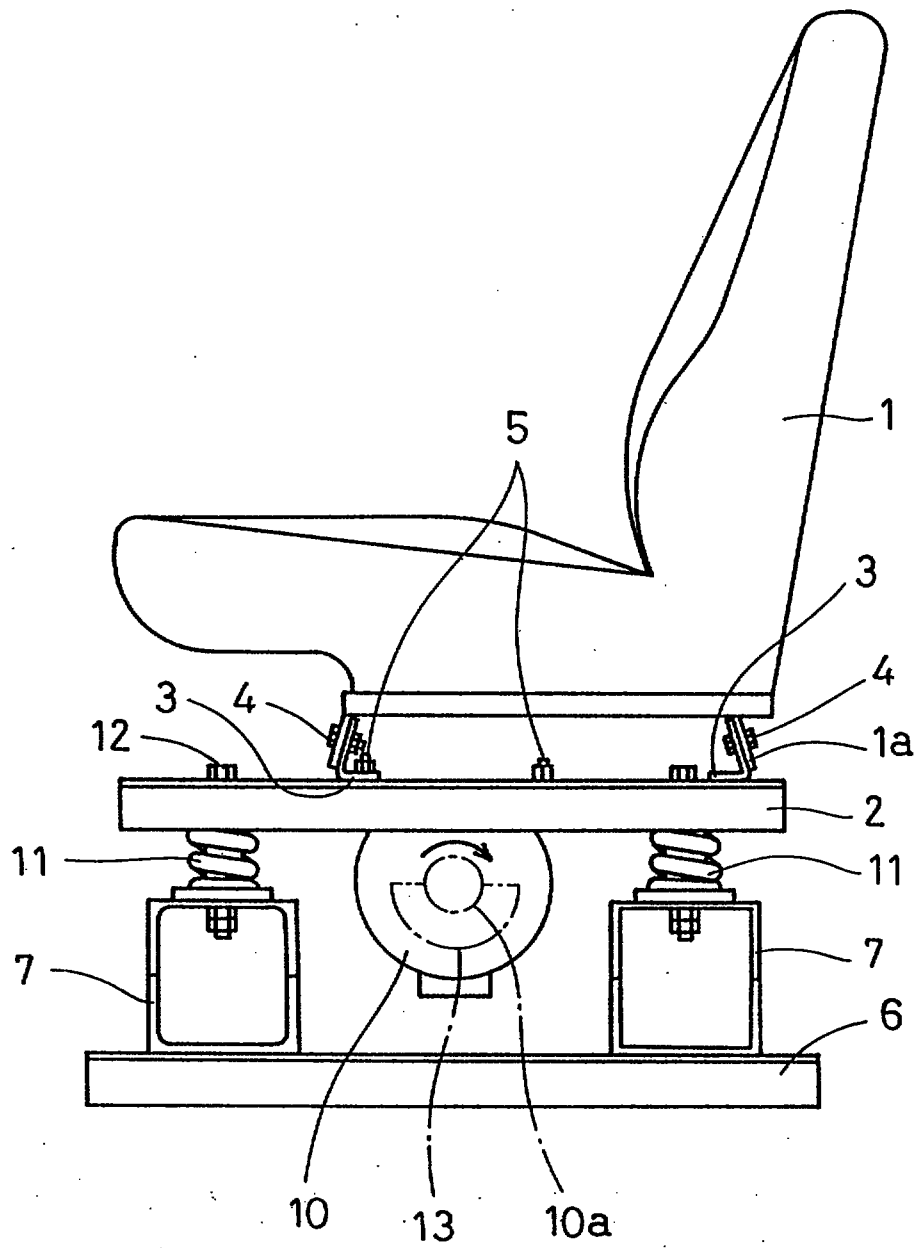


FIG 2

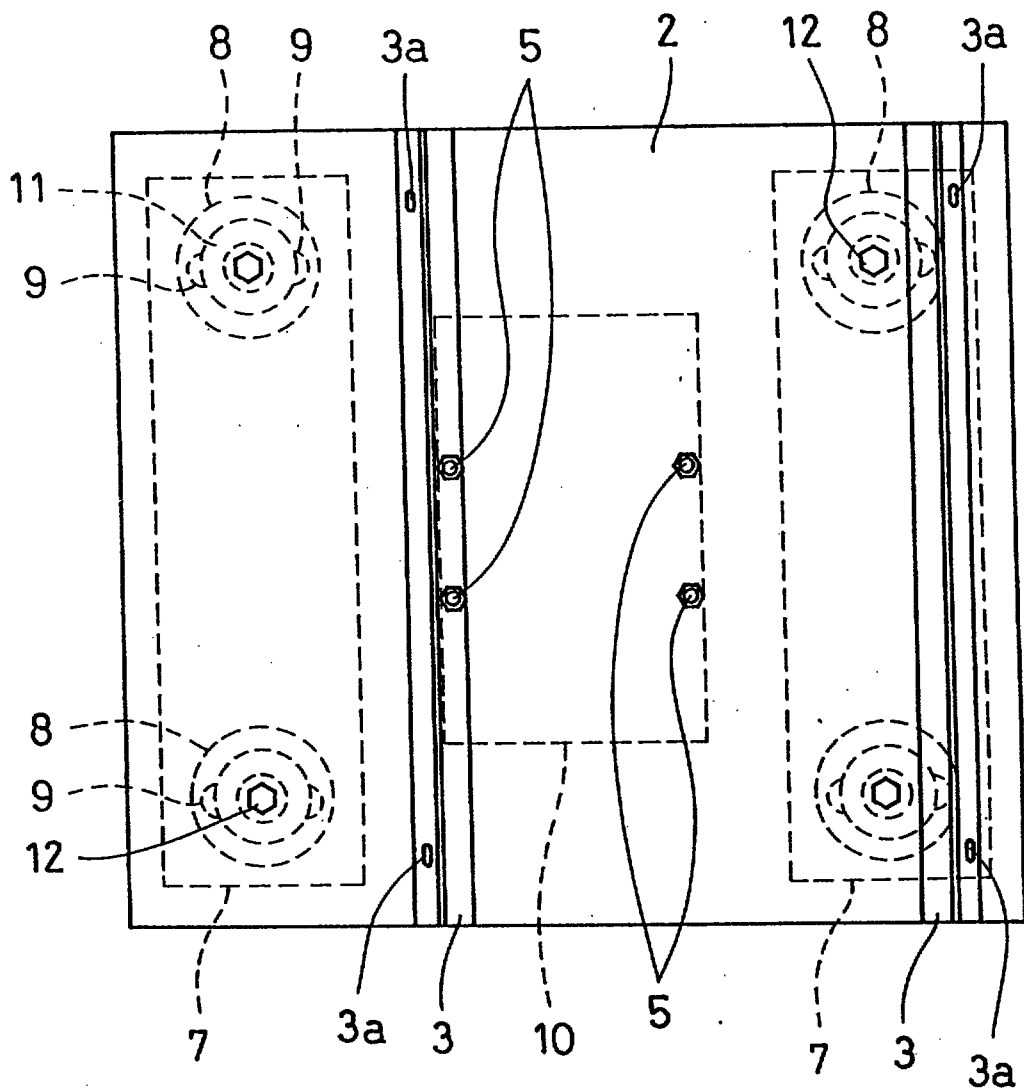


3/22

FIG 3

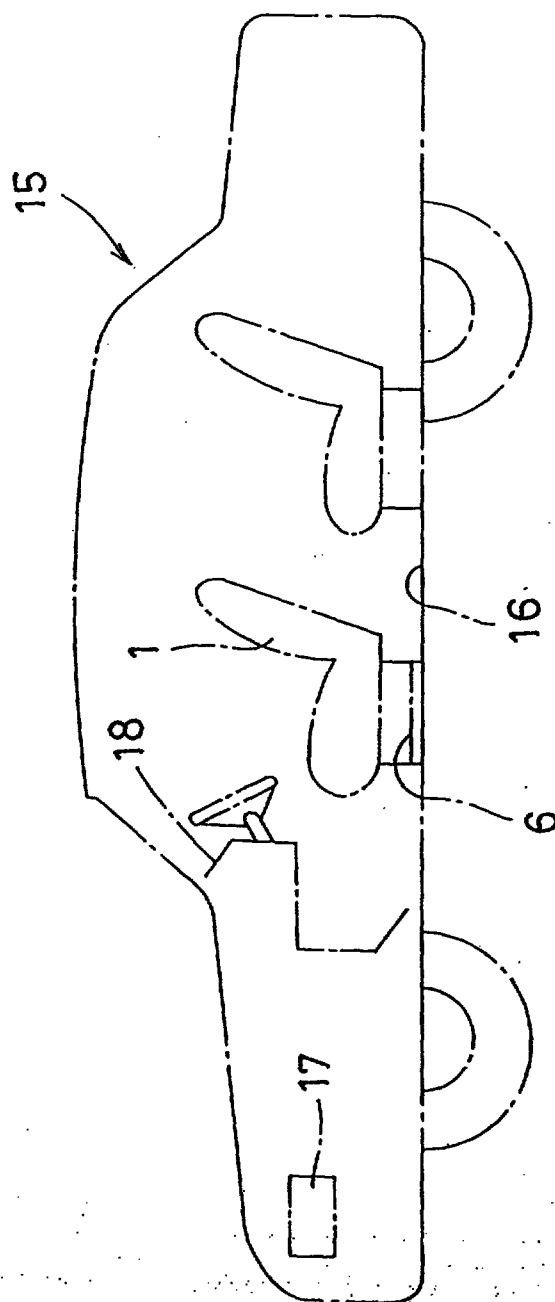


4/22

FIG 4

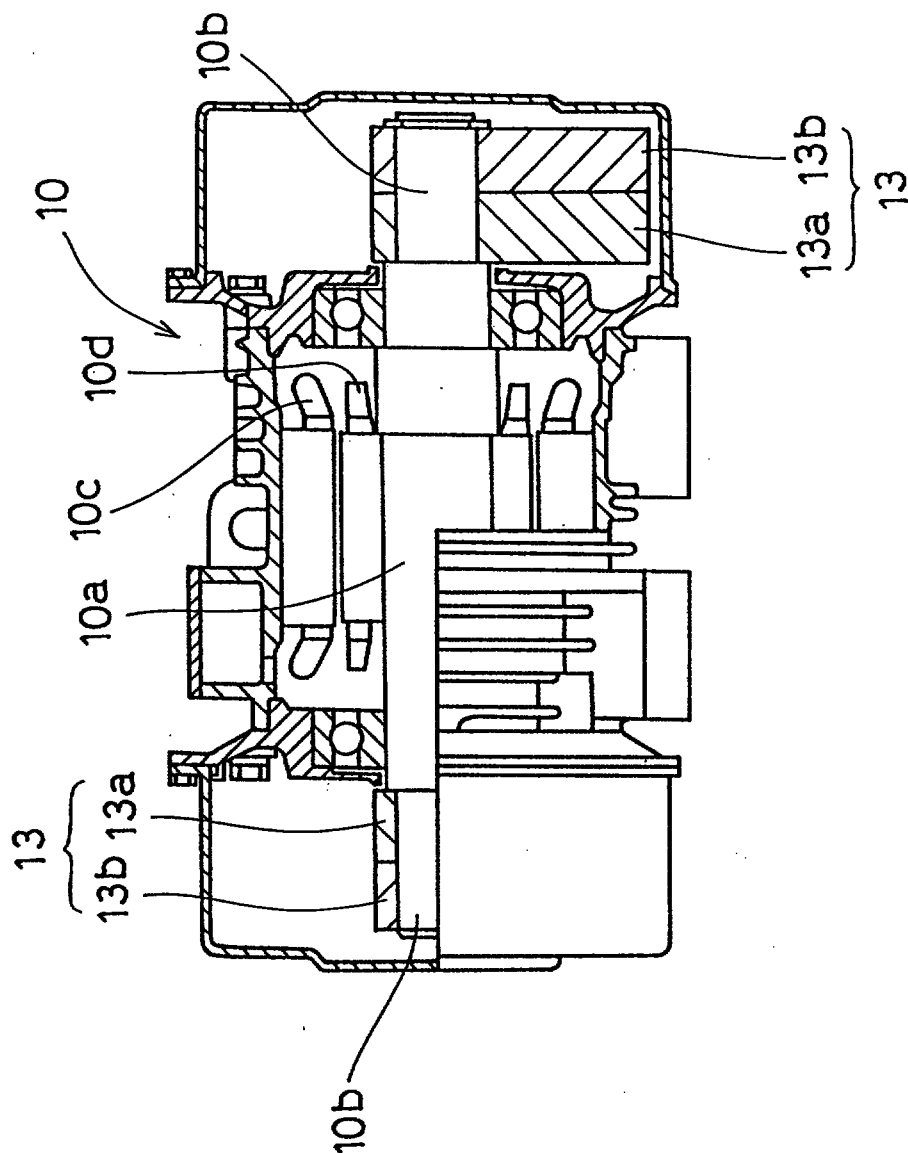


5/22

FIG 5

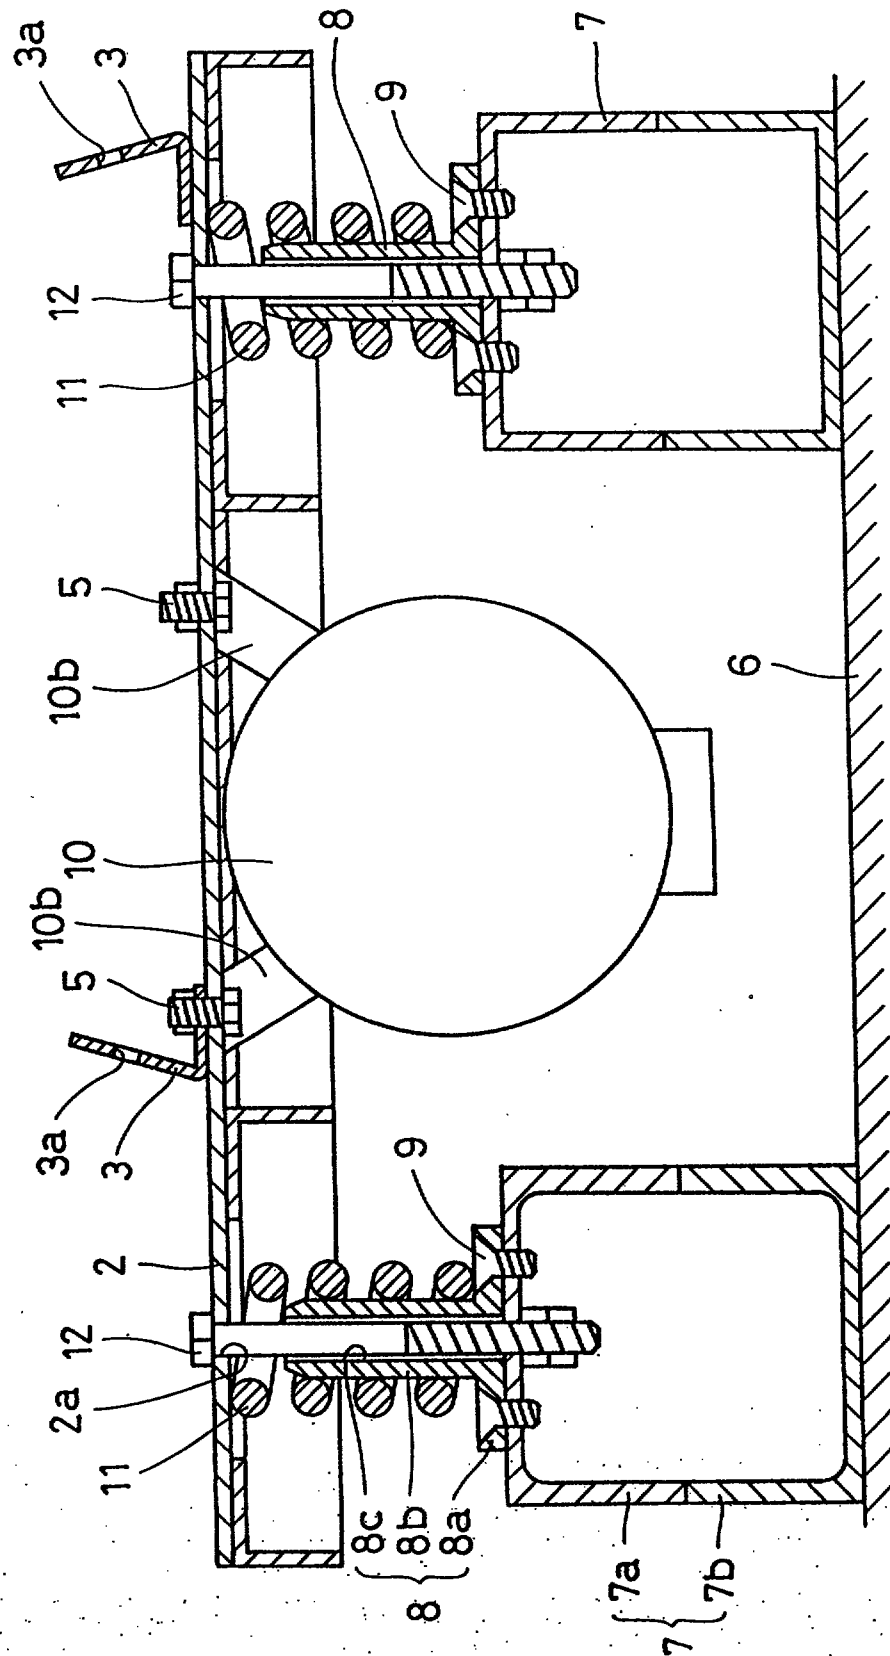


6/22

FIG 6

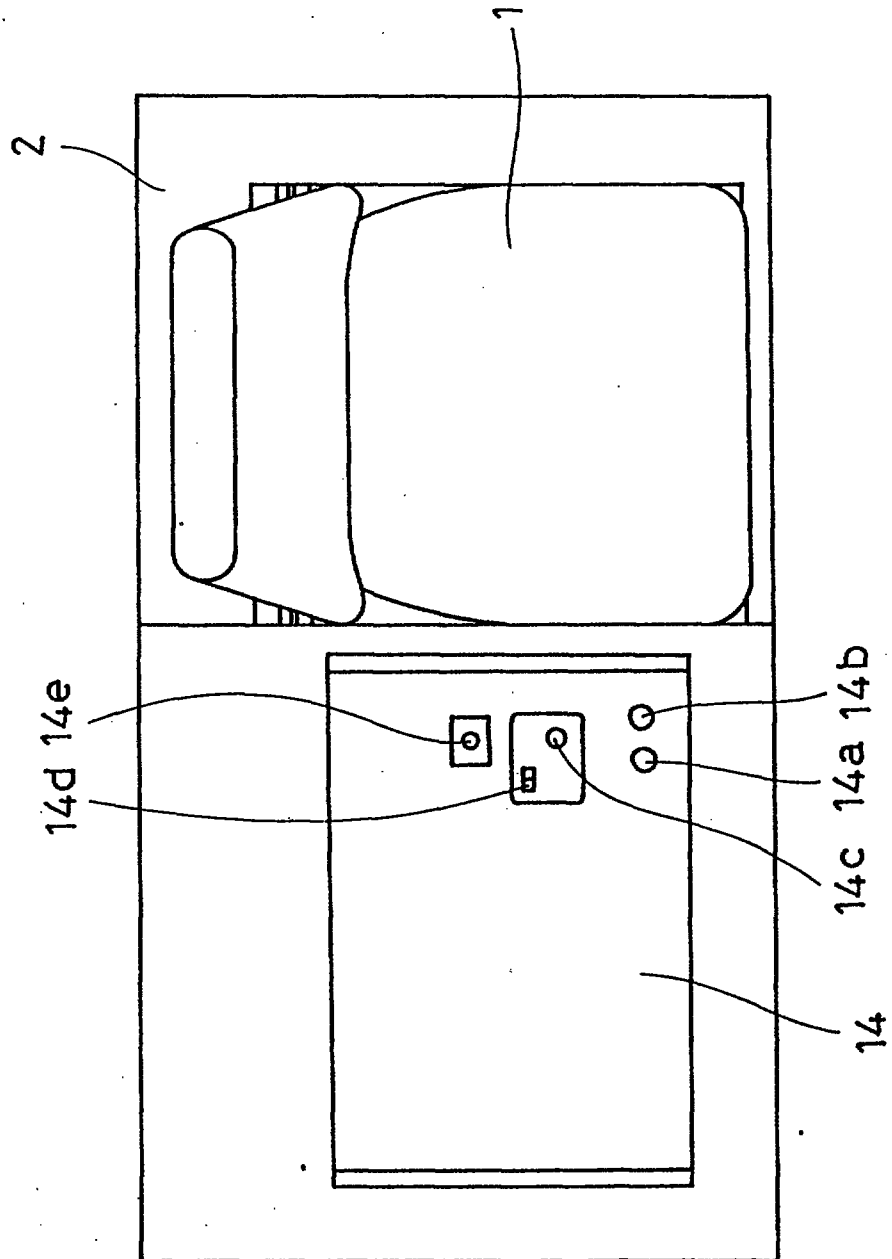


7/22

FIG 7

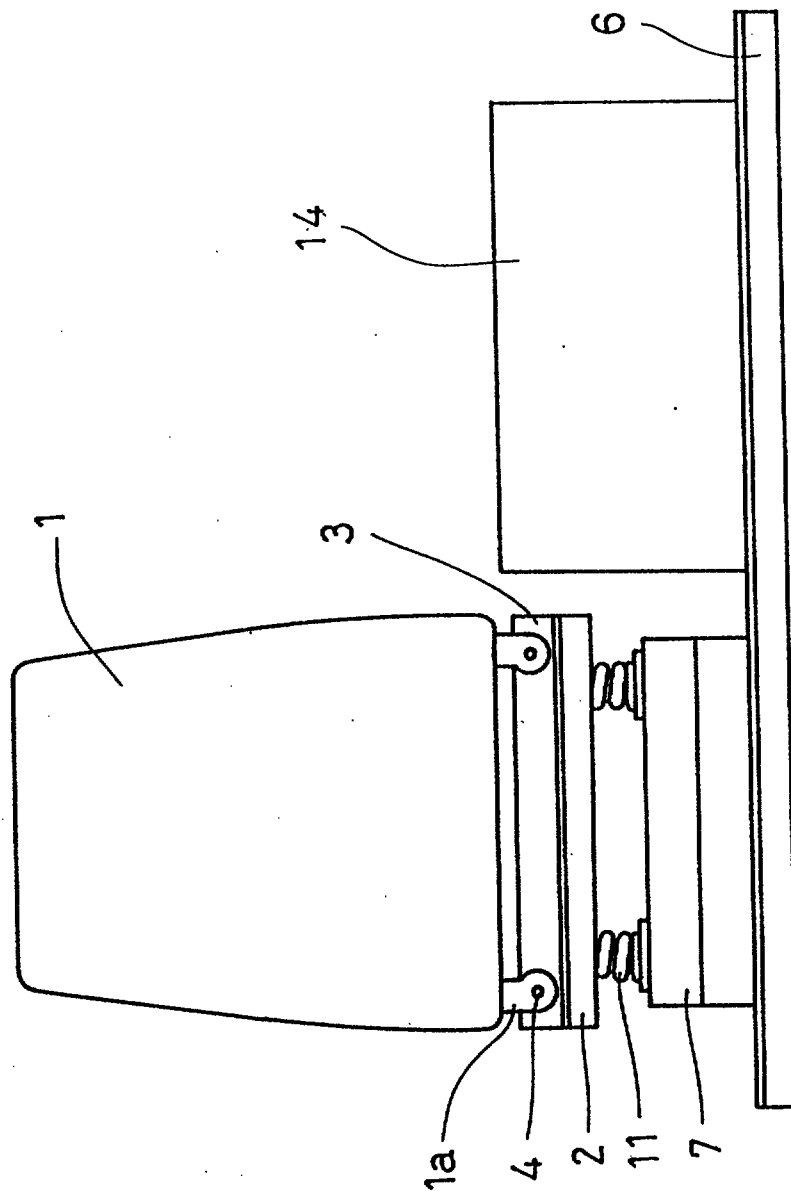


8/22

FIG 8

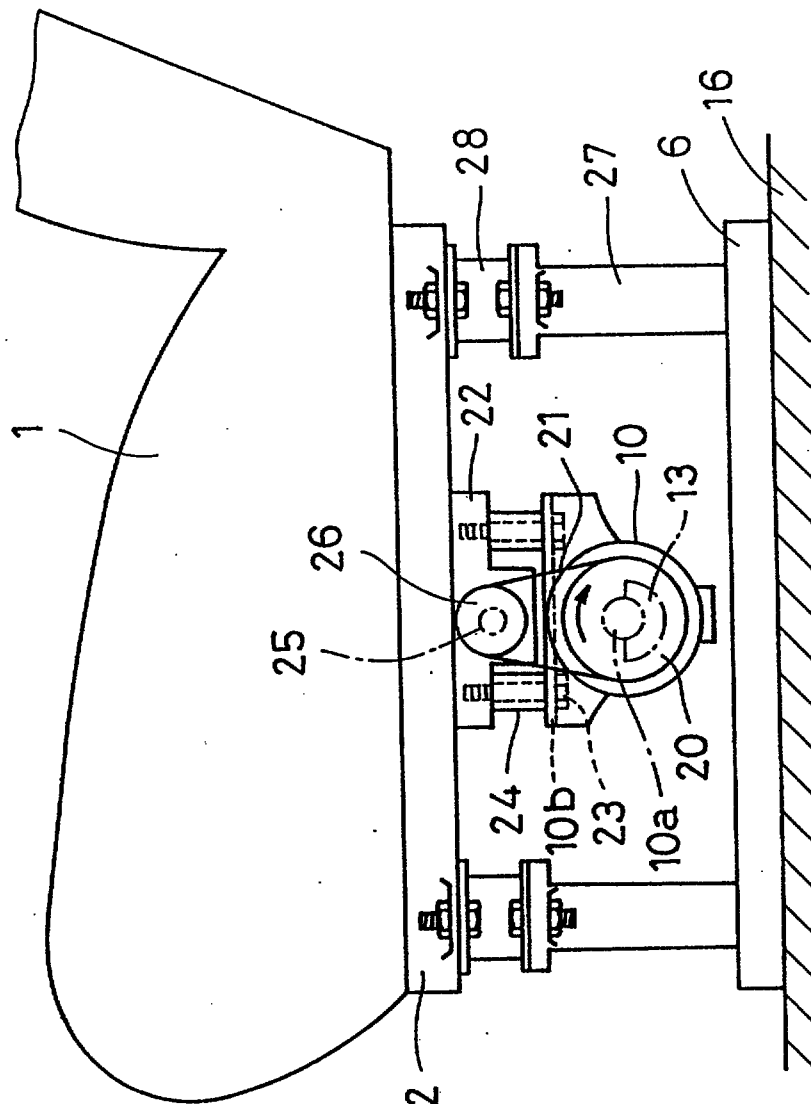

9/22

FIG 9

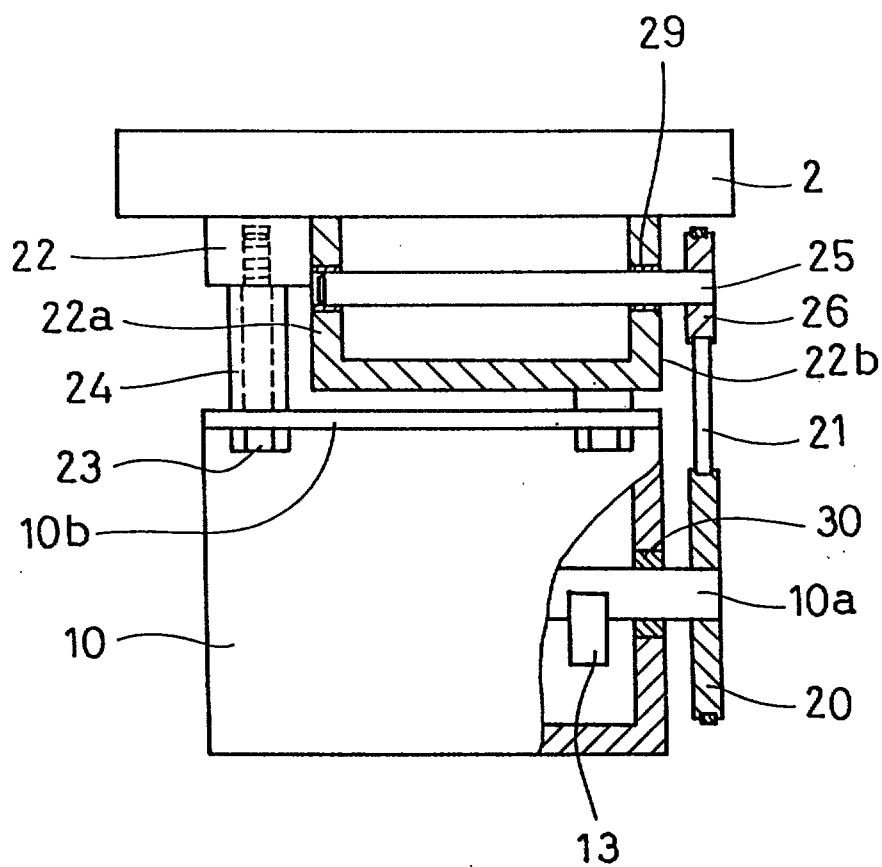

10/22

FIG 10



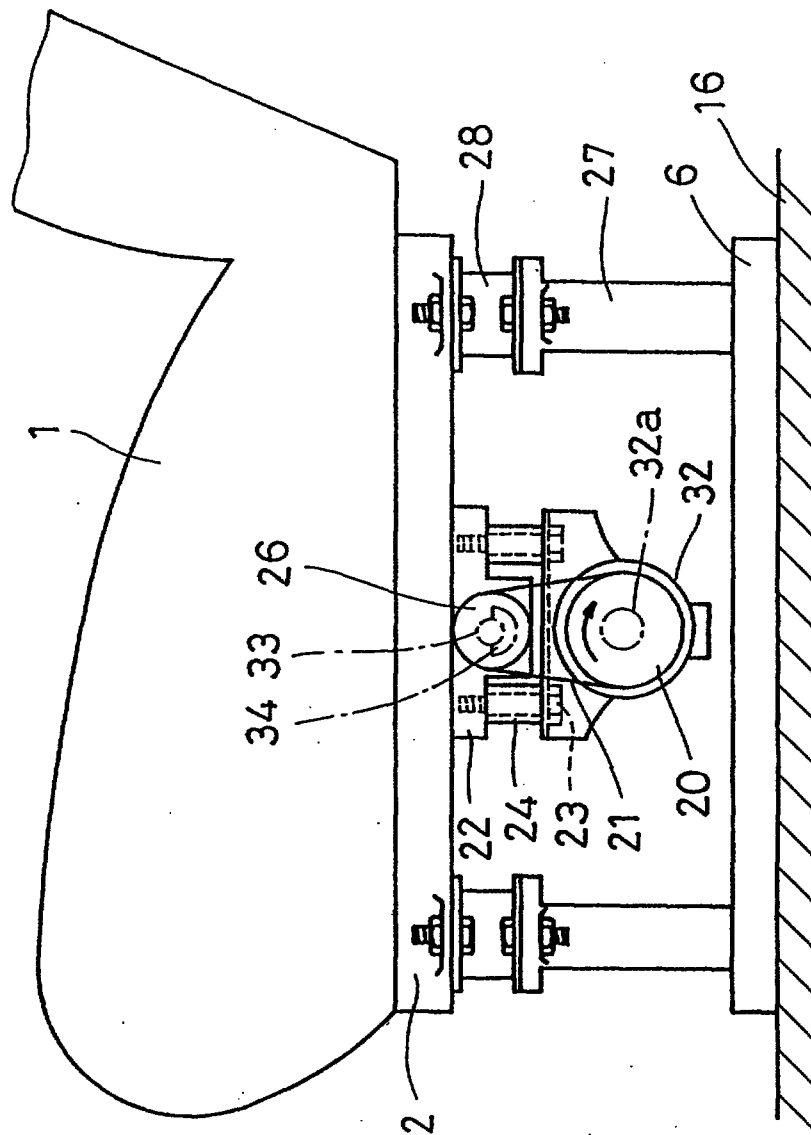


FIG 11

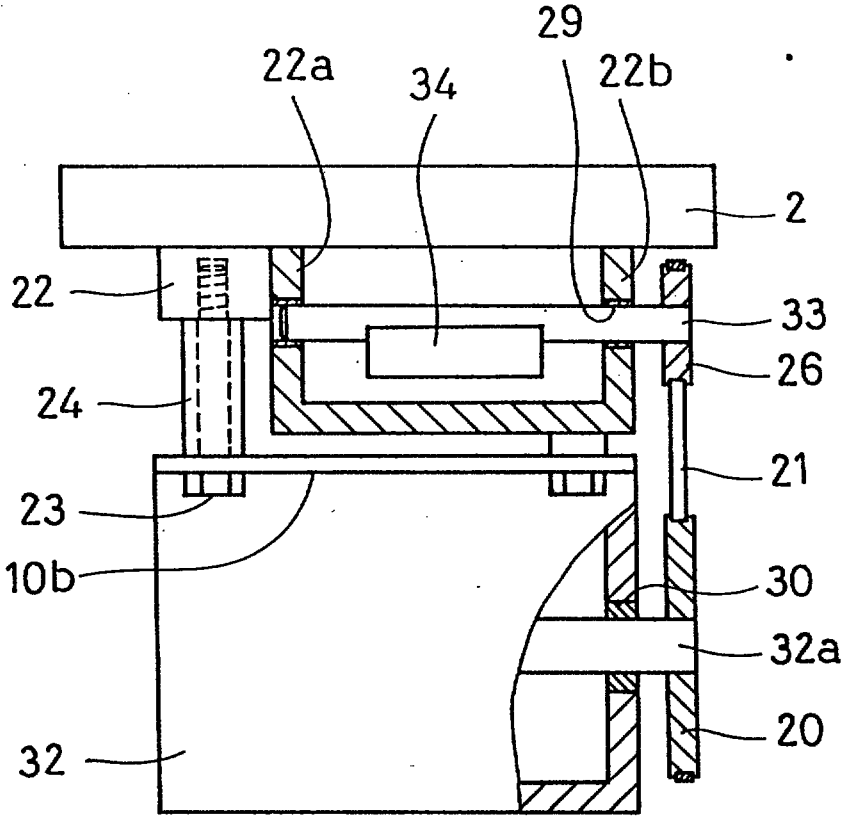


12/22

FIG 12

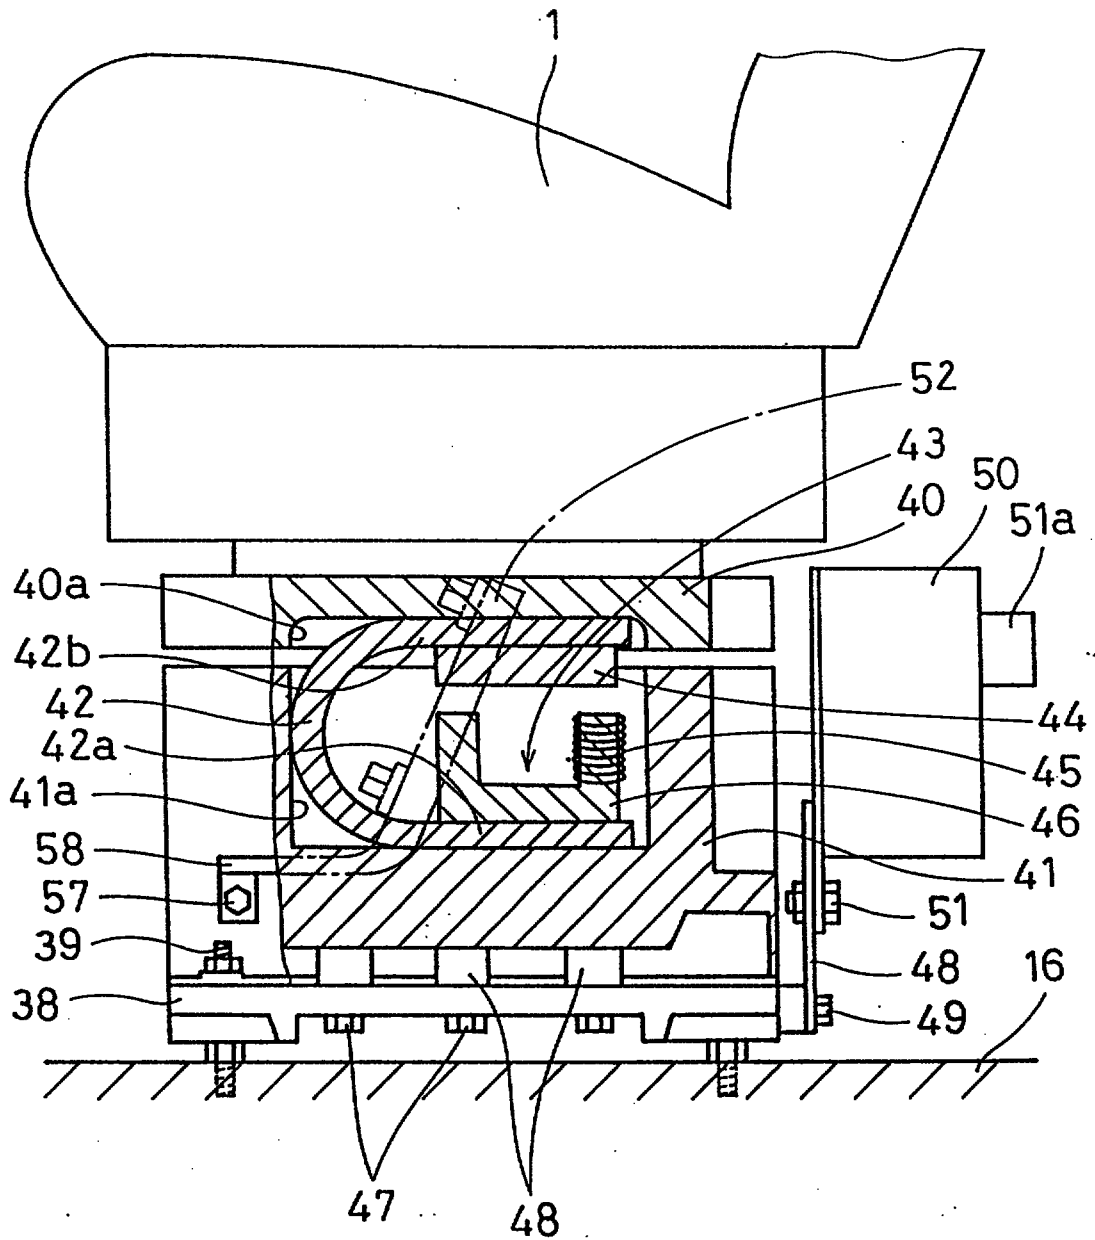


13/22

FIG 13

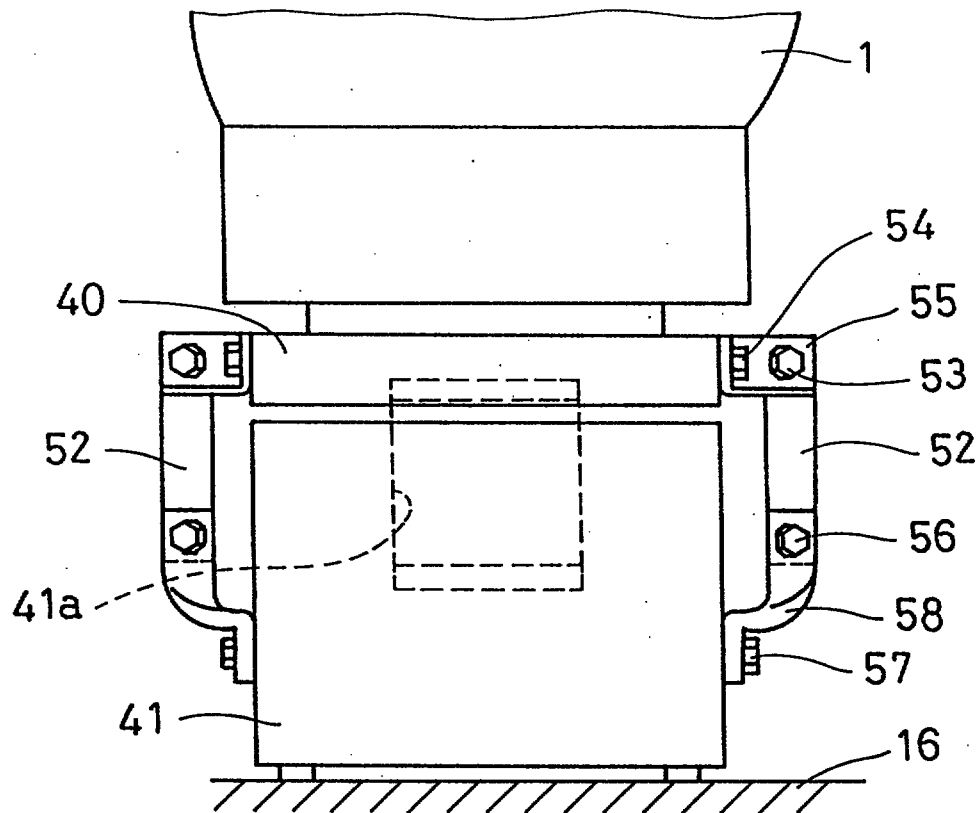


14/22

FIG 14

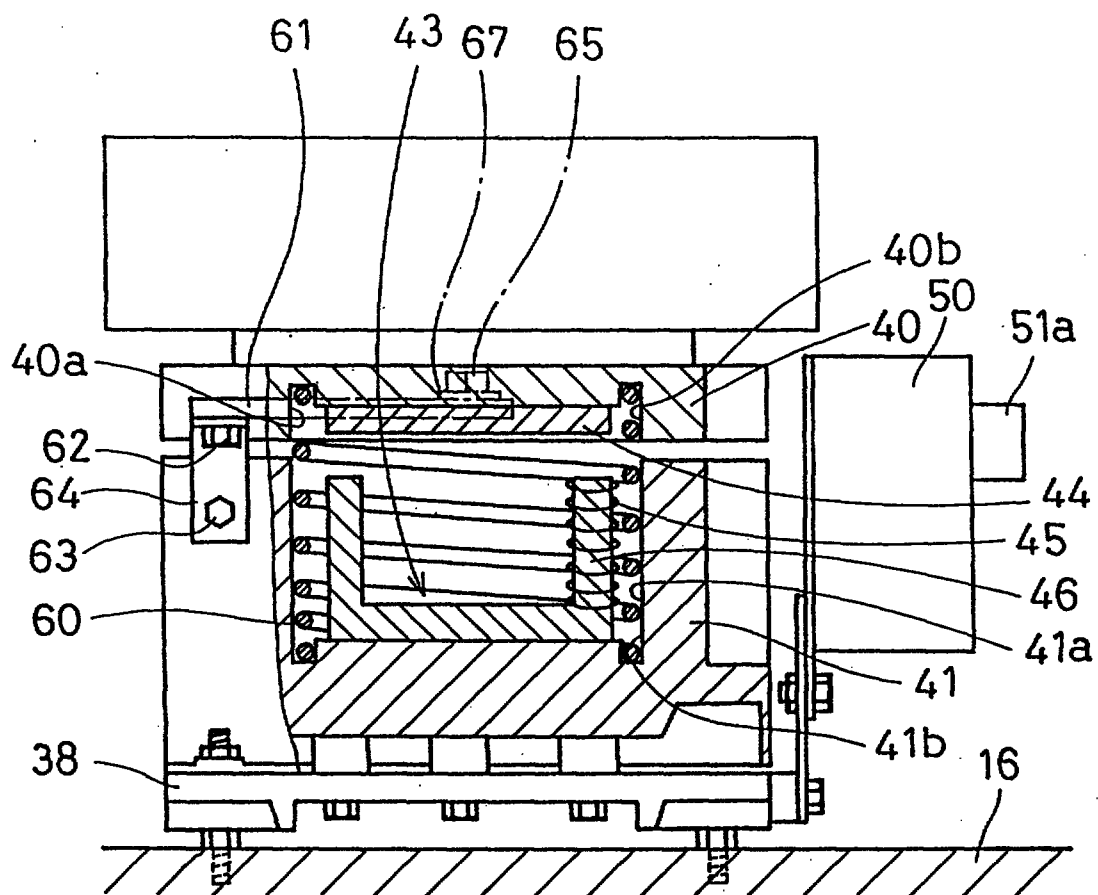


15/22

FIG 15

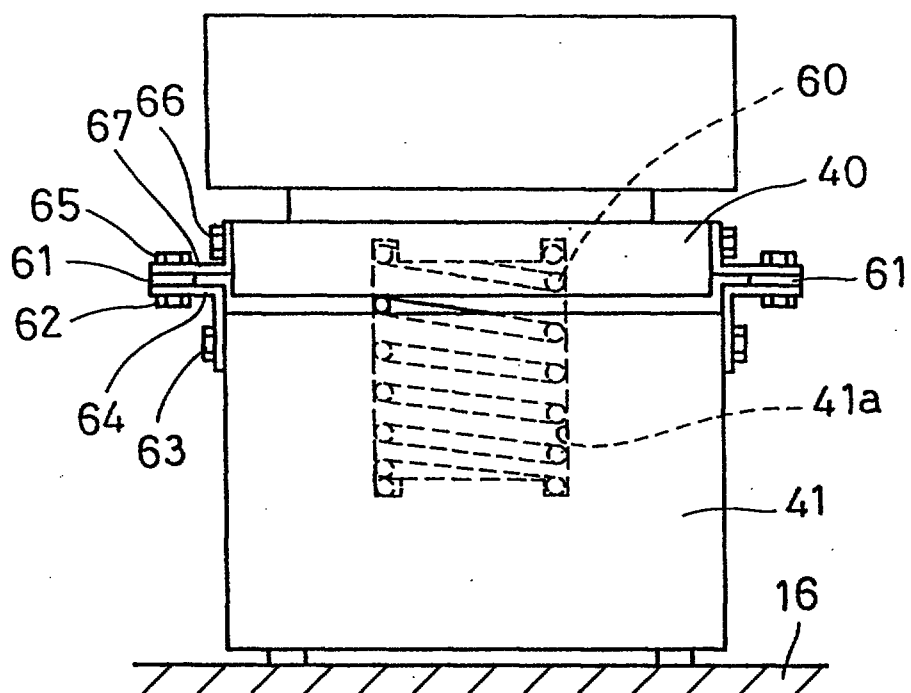


16/22

FIG 16

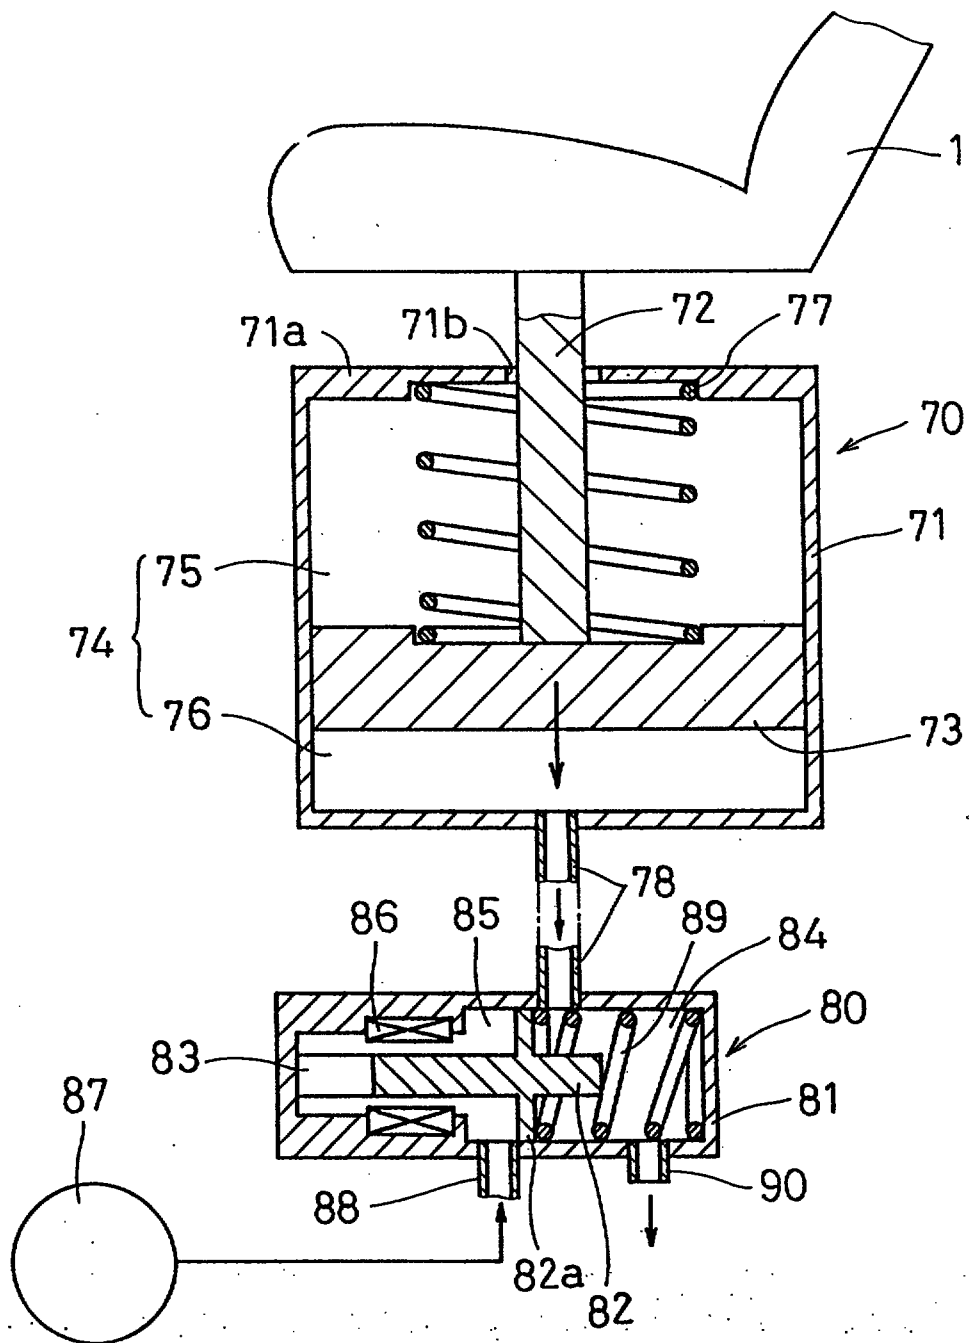


17/22

FIG 17

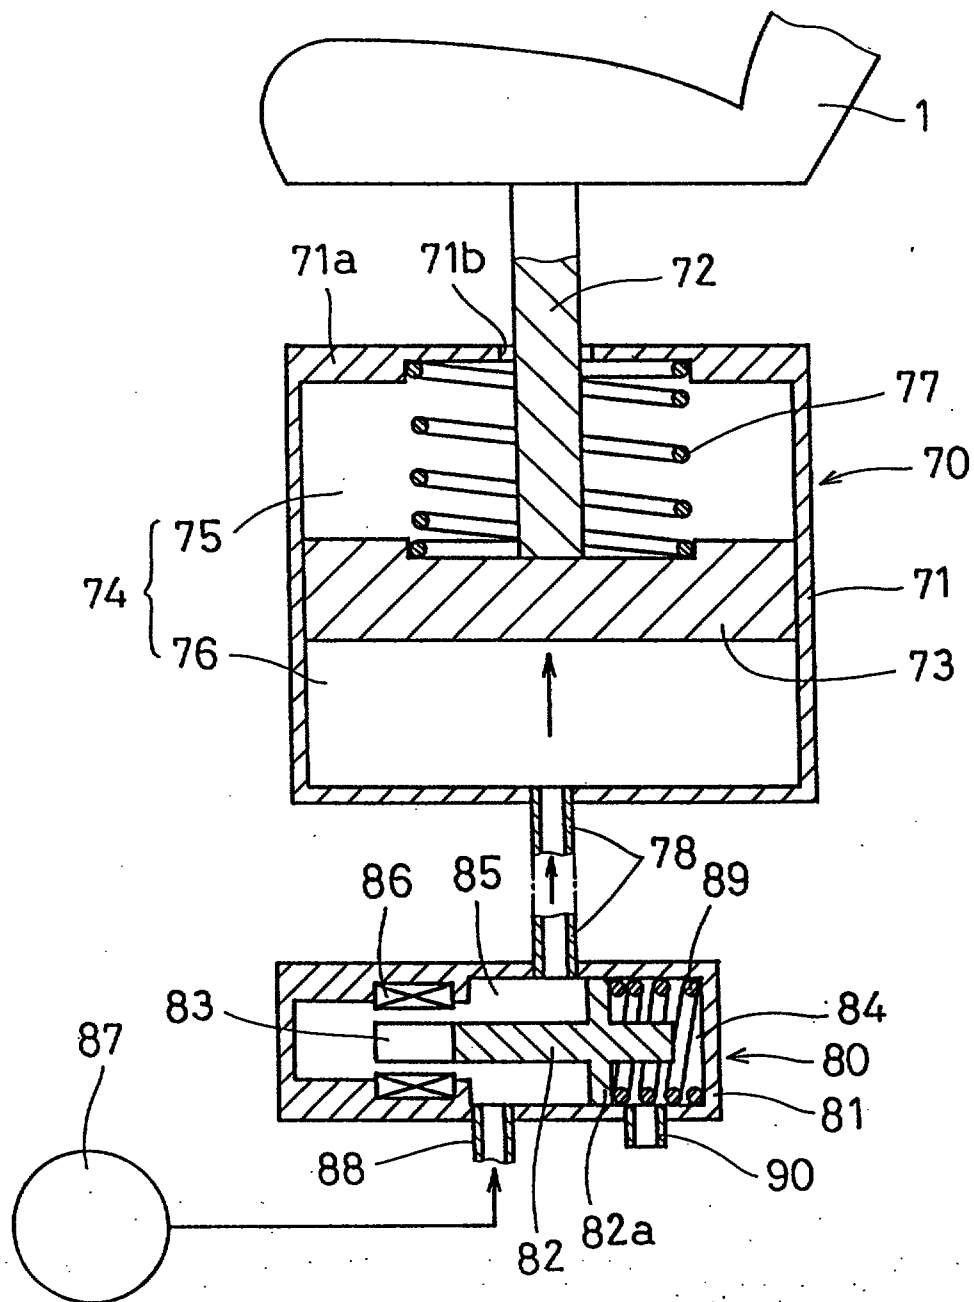


18/22

FIG 18

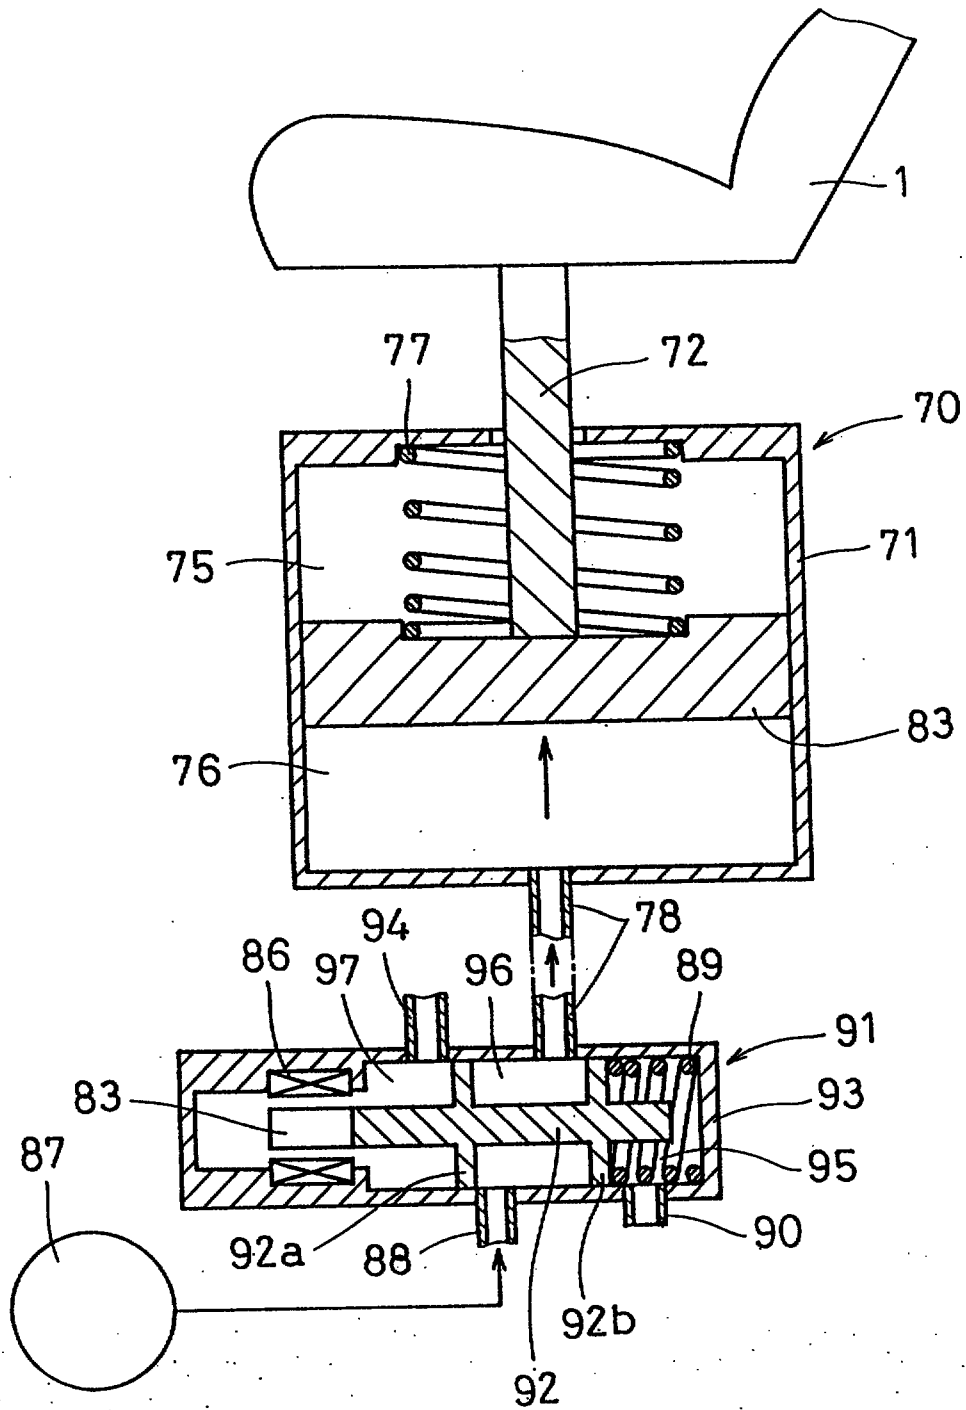

19/22


FIG 19

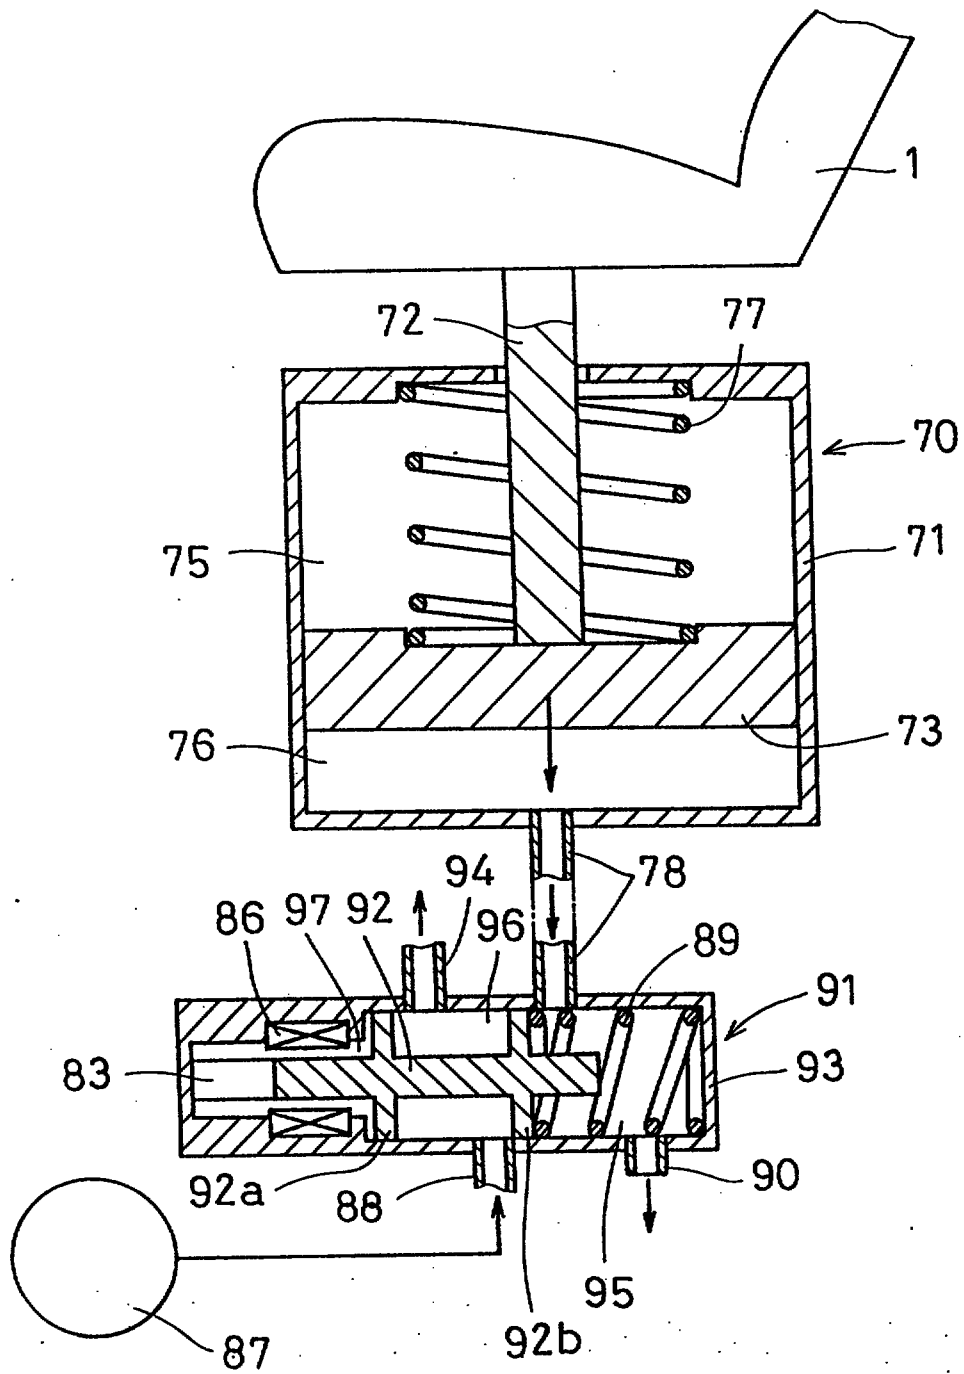

Date : 07 AUG 1996

20/22

FIG 20

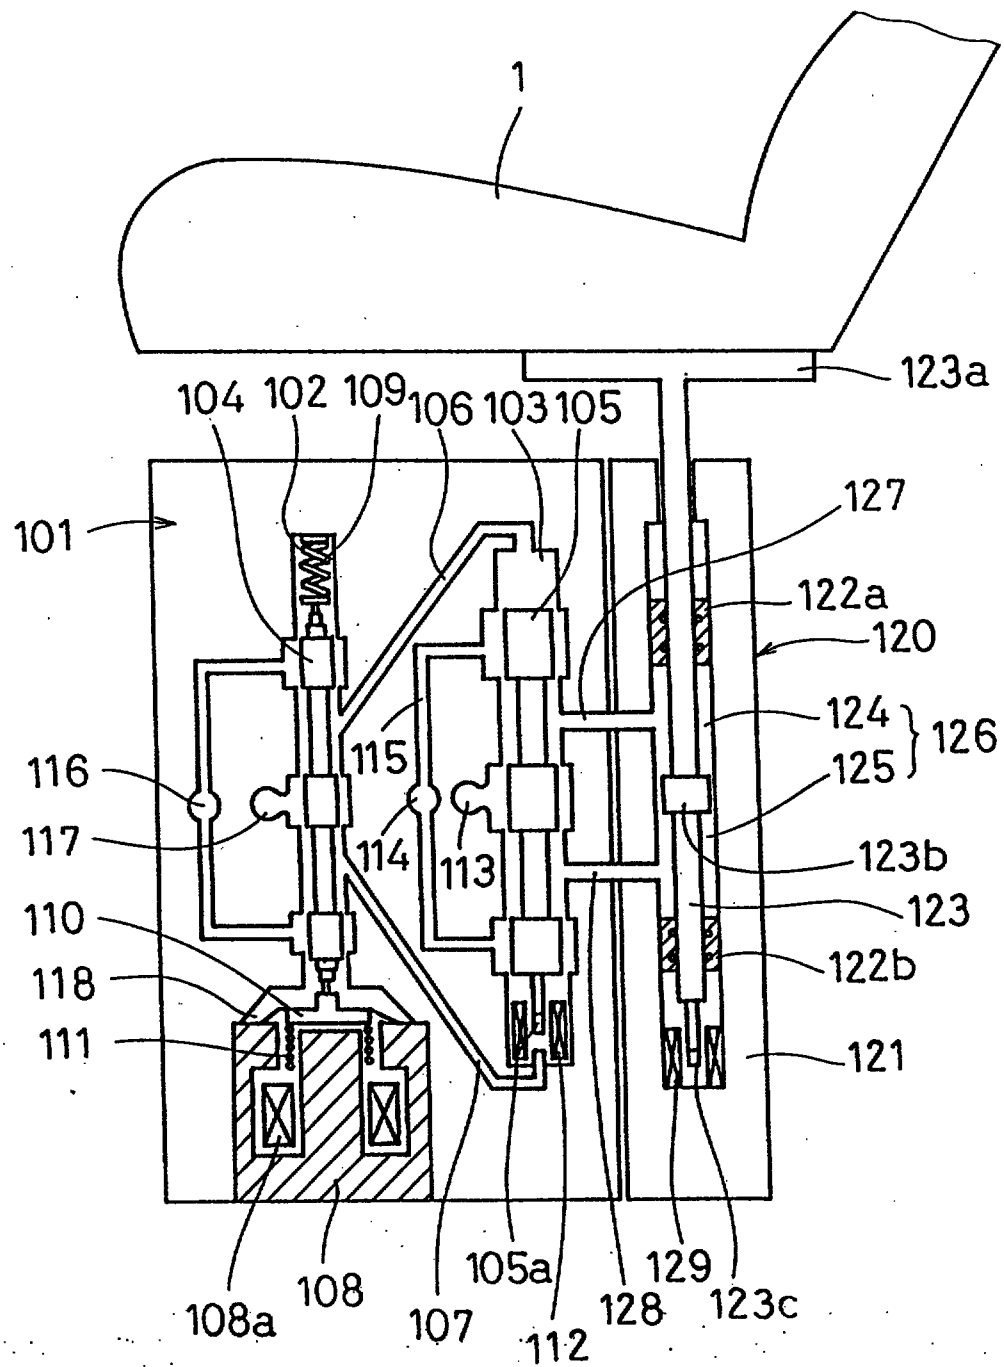

21/22

FIG 21

