

23/04/03
2003022852

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



162162

(43) International Publication Date
13 March 2003 (13.03.2003)

PCT

(10) International Publication Number
WO 03/020599 A1

(51) International Patent Classification⁷: **B65D 1/00**

(21) International Application Number: PCT/US02/22727

(22) International Filing Date: 17 July 2002 (17.07.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/316,759 31 August 2001 (31.08.2001) US
09/683,567 18 January 2002 (18.01.2002) US

(71) Applicant (for all designated States except US):
SONOCO DEVELOPMENT, INC. [US/US]; North
Second Street, Hartsville, SC 29550 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ANTAL, Keith, SR.**
[US/US]; 13 Knollwood Dr., Valatie, NY 12184 (US).

(74) Agent: **FASSNACHT, Harold**; Bullwinkel Partners, Ltd.,
19 S. LaSalle Street, Suite 1300, Chicago, IL 60603 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,

[Continued on next page]

(54) Title: SAFETY CAP FOR FLUID DISPENSING CARTRIDGES

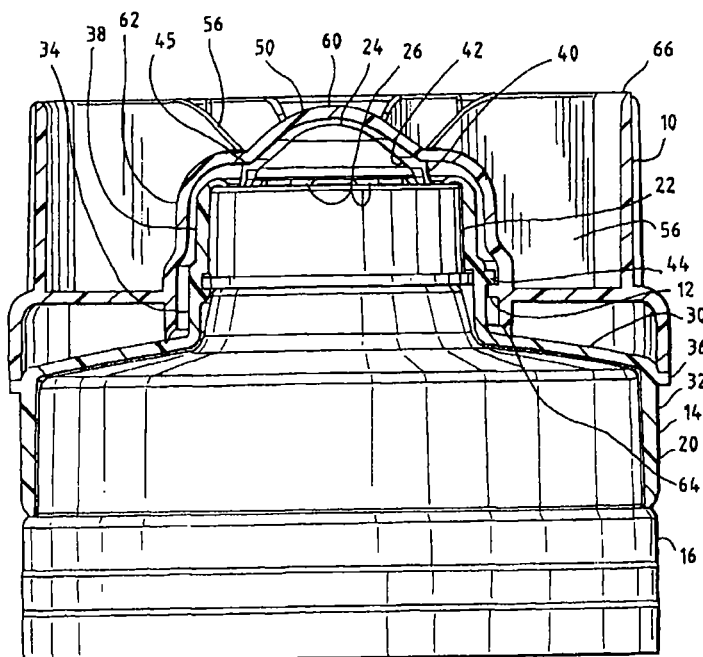

(57) Abstract: A removable safety cap (10) for use with an ink cartridge or other fluid holding container having a nozzle (34) extending from the dispensing end. The safety cap (10) prevents the flow of ink out of the cartridge or, if ink escapes past the dispensing nozzle seal, prevents the flow of ink outside the cap (10). The cap (10) also enables the ink cartridge to be set upright with the dispensing end down without the need for a nest or fixture to help support the cartridge.

WO 03/020599 A1



ACTION

- Published:**

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.