



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B26B 21/24, 21/52, B65D 83/10	A1	(11) International Publication Number: WO 98/36879 (43) International Publication Date: 27 August 1998 (27.08.98)
--	----	---

(21) International Application Number: PCT/US98/02949

(22) International Filing Date: 18 February 1998 (18.02.98)

(30) Priority Data:
08/802,382 19 February 1997 (19.02.97) US(63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Application
US 08/802,382 (CON)
Filed on 19 February 1997 (19.02.97)

(71) Applicant (for all designated States except US): THE GILLETTE COMPANY [US/US]; Prudential Tower Building, Boston, MA 02199 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): METCALF, Stephen, C. [US/US]; 16 Adella Avenue, West Newton, MA 02157 (US). PETRICCA, John, D. [US/US]; 128 Colburn Street #2, Leominster, MA 01453 (US). TROTTA, Robert, A. [US/US]; 312 West Elm Street, Pembroke, MA 02359 (US).


(74) Agents: GALLOWAY, Peter, D.; Ladas & Parry, 26 West 61st Street, New York, NY 10023 (US) et al.

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

*With international search report.**Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*

(54) Title: DISPENSING RAZOR BLADE CARTRIDGES USED WITH A HANDLE

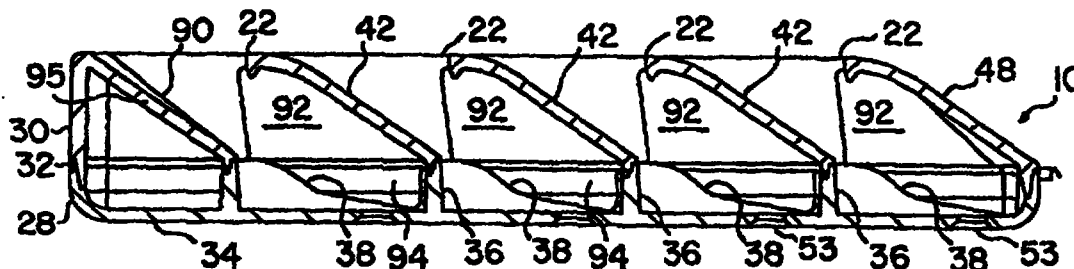

(57) Abstract

A cartridge dispenser (10) for razor blade cartridges (12) including latches (22) that retain cartridges in predetermined positions permitting connection to a handle connecting structure (64) on a handle (63) as the handle is moved toward the cartridge, each latch (22) having a latch camming structure (54) that is shaped and positioned to interact with corresponding handle camming structure (69) so as to cause the latch (22) to be deflected and to unlatch a cartridge (12) as the handle is moved toward and connected to cartridge connecting structure (16) of a cartridge. The dispenser (10) also has blade unit dividers (36) that extend from the base (34), are substantially perpendicular to the base, and define blade unit regions in which the blade units are received, and angled dividers (42) that extend from the ends of respective blade unit dividers (36) at acute angles with the base and define angled regions through which the blade units pass in delivery to and removal from the blade unit regions and in which the cartridge connecting structure is received.