



(51) International Patent Classification:
H01J 37/32 (2006.01) *B29C 33/56* (2006.01)

(21) International Application Number:
PCT/EP2009/050651

(22) International Filing Date:
21 January 2009 (21.01.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
08100923.5 25 January 2008 (25.01.2008) EP

(71) Applicant (for all designated States except US): **NO-VARTIS AG** [CH/CH]; Lichtstrasse 35, CH-4056 Basel (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **COCORA, Gabriela** [DE/DE]; Am Sonnenberg 39, 63820 Elsenfeld - Eichelsbach (DE). **HEINRICH, Axel** [DE/DE]; Beethoven Strasse 53b, 63743 Aschaffenburg (DE). **HAGMANN, Peter** [DE/DE]; Justin Kirchgässner Strasse 2, 63906 Erlenbach am Main (DE).

(74) Agent: **BOHEST AG**; P.O. Box 160, CH-4003 Basel (CH).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(88) Date of publication of the international search report:
29 October 2009

(54) Title: APPARATUS, CARRIER AND METHOD FOR THE PLASMA TREATMENT OF MOLDS

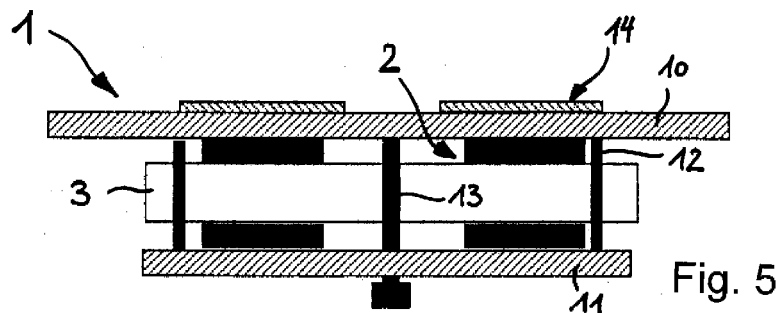


Fig. 5

(57) Abstract: An apparatus for the plasma treatment of molds (2), in particular for contact lens molds, comprises a treatment chamber (50), in which a first electrode (51) is arranged facing a carrier (1;4) for carrying the molds (2) to be treated. The carrier (1;4) forms the second electrode (52) and comprises a first metal plate (10;40) having holes (100;400) therein and a second metal plate (11;41) which is arranged spaced apart from the first metal plate (10;40), and which is connected to the first metal plate (10;40) in an electrically conductive manner (12,13;43). The molds (2) are arranged on the second metal plate (11;41) with their molding surfaces (210) facing towards the first electrode (51) and are exposable to plasma through the holes (100;400) in the first metal plate (10;40).