2003015260

27 MAR 2003

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

162162

(43) International Publication Date
2 May 2002 (02.05.2002)

PCT

(10) International Publication Number
WO 02/35204 A1

(51) International Patent Classification[7]: G01M 17/007, G01B 5/00, G01M 17/04

(21) International Application Number: PCT/EP01/10556

(22) International Filing Date:
13 September 2001 (13.09.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
VE2000A000043 23 October 2000 (23.10.2000) IT

(71) Applicant and
(72) Inventor: **ROSSATO, Eride** [IT/IT]; Via G. Galilei, 20, I-30035 Mirano (IT).

(74) Agent: **PIOVESANA, Paolo**; Corso del Popolo, 70, I-30172 Venezia Mestre (IT).


(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*
— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS FOR EFFECTING MEASUREMENTS ON THE GEOMETRY OF MOTOR VEHICLE SUSPENSIONS

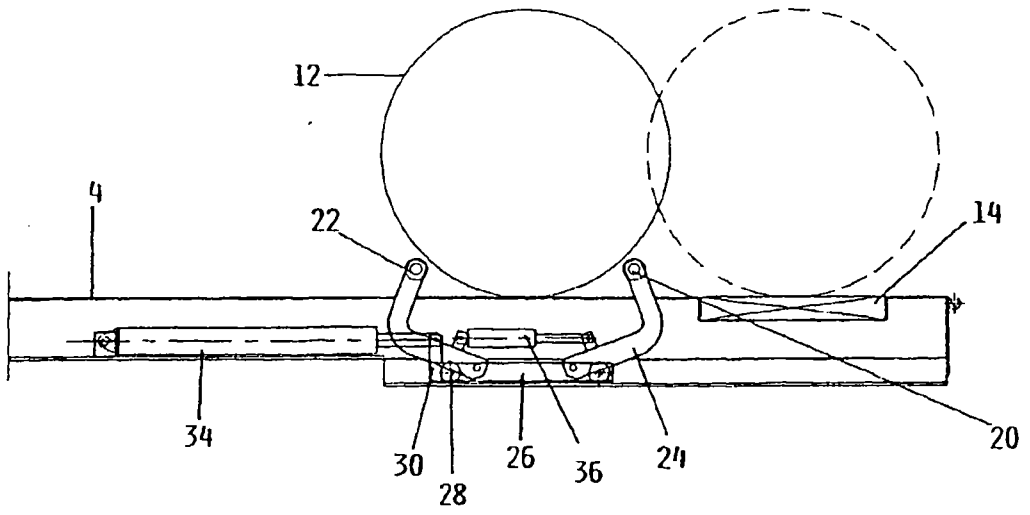

(57) Abstract: An apparatus for effecting measurements on the geometry of the suspensions of a motor vehicle, to be applied to a vehicle lift, characterised by comprising on at least one runway (4), in a position corresponding with at least one wheel (12, 40), a pair of rollers (20, 22; 50, 52) which substantially do not project from the runway surface when at rest, but can be raised to adhere to said wheel (12, 40) on opposite sides of the region of contact with said runway, said pair of rollers (20, 22; 50, 52) being associated with means (26, 36; 42, 68) for causing them to translate, when raised, along the corresponding runway (4).

WO 02/35204 A1

ACTION