

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
12 January 2023 (12.01.2023)



(10) International Publication Number
WO 2023/280565 A1

(51) International Patent Classification:
F26B 3/06 (2006.01) *F26B 17/26* (2006.01)

(21) International Application Number:
PCT/EP2022/066889

(22) International Filing Date:
21 June 2022 (21.06.2022)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
21183993.1 06 July 2021 (06.07.2021) EP

(71) Applicant: **RWE GENERATION NL B.V.** [NL/NL];
Amerweg 1, 4931 NC Geertruidenberg (NL).

(72) Inventors: **EURLINGS, Johannes Theodorus Gerardus Marie**; Brugstraat 4, 6125 RC Obbicht (NL). **DE BEST, Carlo Jacobus Johannes Maria**; Dorpstraat 88, 6659 CH Wamel (NL).

(74) Agent: **HEINE, Dr. Christian**; KEENWAY Patentanwälte
Neumann Heine Taruttis PartG mbB, 103363, 40024 Düsseldorf (DE).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

(54) Title: WASTE DRYING

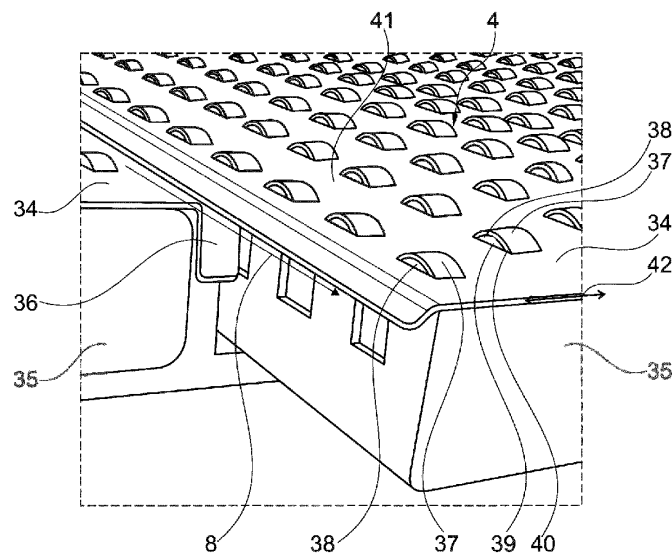


Fig. 3

(57) Abstract: According to the present invention waste (7) is dried by applying the waste (7) to a floor (4) comprising several floor segments (34, 44, 46) and by conveying the waste (7) by a push floor mechanism in which only a part of the floor segments (34, 44, 46) is moved at a time in a direction of movement (8) or a counter direction (61). The energy for drying the waste (7) is provided by warm air (11) through openings (38) in the floor segments (34, 44, 46) from a pressure chamber (3) through the floor (4) into the waste (7) and through the waste (7).

[Continued on next page]

EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))