



(51) International Patent Classification:

A61M 16/00 (2006.01) A61M 16/10 (2006.01)  
A61M 16/16 (2006.01)

(21) International Application Number:

PCT/IB2022/054939

(22) International Filing Date:

26 May 2022 (26.05.2022)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

63/193,551 26 May 2021 (26.05.2021) US

(71) Applicant: **FISHER & PAYKEL HEALTHCARE LIMITED** [NZ/NZ]; 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ).

(72) Inventors: **LUI, Minghon Carlton**; 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ). **HSU, Jack Che-Wei**; 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ). **ORTALI, Luca**; 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ). **HAN, Jae Chul**; 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ).

(74) Agent: **FLINT INTELLECTUAL PROPERTY**; PO Box 11058, Ellerslie, Auckland, 1542 (NZ).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: CONTROL OF COMPONENTS OF A BREATHING ASSISTANCE APPARATUS

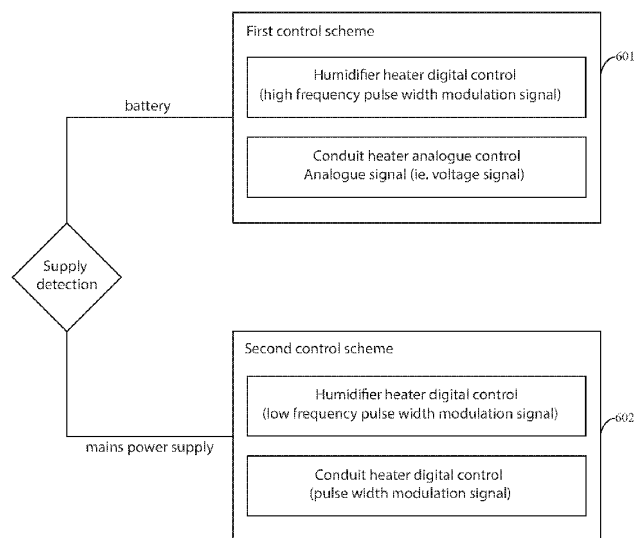


Figure 5

(57) Abstract: Disclosed is an apparatus, where a controller of the apparatus is configured to control at least one heater according to at least a first control scheme when powered by a battery and a second control scheme when powered by a mains power supply.

[Continued on next page]

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
KM, ML, MR, NE, SN, TD, TG).

**Published:**

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed  
contained color or greyscale and is available for download  
from PATENTSCOPE*