

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
28 October 2004 (28.10.2004)


PCT

(10) International Publication Number
WO 2004/091792 A2

- (51) International Patent Classification⁷: **B01L**
- (21) International Application Number:
PCT/US2004/011580
- (22) International Filing Date: 15 April 2004 (15.04.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/462,963 15 April 2003 (15.04.2003) US
10/454,742 3 June 2003 (03.06.2003) US
10/652,586 29 August 2003 (29.08.2003) US
- (71) Applicant (for all designated States except US): **ENTEGRIS, INC.** [US/US]; 3500 Lyman Boulevard, Chaska, MN 55318 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **EXTRAND, Charles, W.** [US/US]; 408 East Minnehaha Parkway, Minneapolis, MN 55419 (US). **WRIGHT, Michael** [US/US]; 5115 Meadville Street, Greenwood, MN 55331 (US).
- (74) Agents: **CHRISTENSEN, Douglas, J.** et al.; Patterson, Thunte, Skaar & Christensen, P.A., 4800 IDS Center, 80 South 8th Street, Minneapolis, MN 55402-2100 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: MICROFLUIDIC DEVICE WITH ULTRAPHOBIC SURFACES

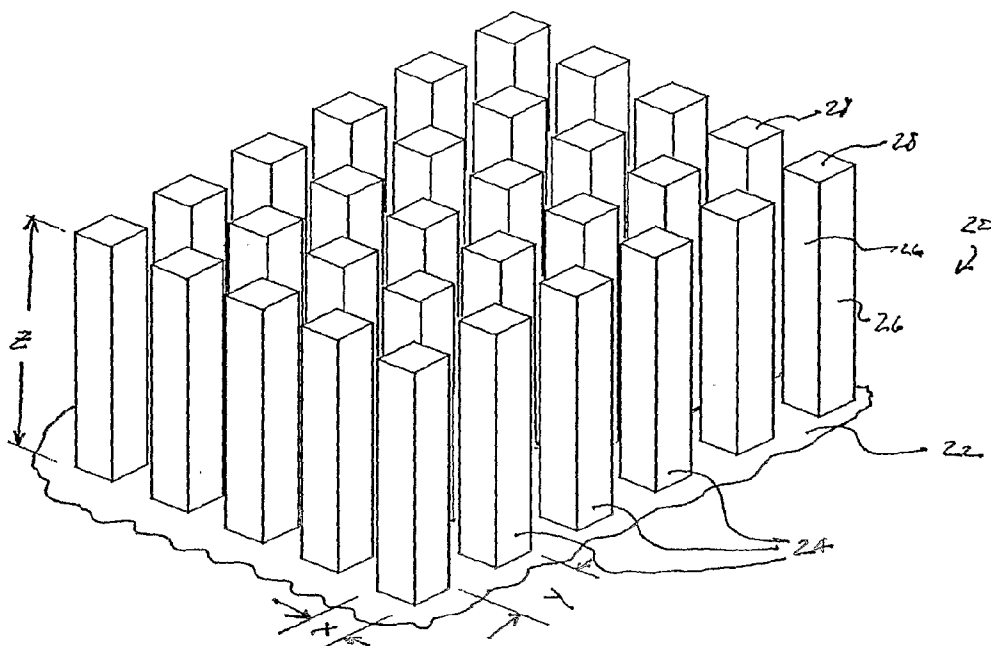

(57) Abstract: A microfluidic device having durable ultraphobic fluid contact surfaces in the fluid flow channels of the device. The ultraphobic surface generally includes a substrate portion with a multiplicity of projecting regularly shaped microscale or nanoscale asperities disposed in a regular array so that the surface has a predetermined contact line density equal to or greater than a critical contact line density, and so that the ratio of the cross-sectional dimension of the asperities to the spacing dimension of the asperities is less than or equal to 0.1.



Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.