



(51) International Patent Classification:

A61F 2/06 (2006.01) A61F 2/90 (2006.01)
A61F 2/84 (2006.01)

(21) International Application Number:

PCT/US2010/039041

(22) International Filing Date:

17 June 2010 (17.06.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12/492,770 26 June 2009 (26.06.2009) US

(71) Applicant (for all designated States except US):

BIOSENSORS INTERNATIONAL GROUP, LTD.
[US/US]; 20250 Acacia Street, Suite 200, Newport
Beach, California 92660 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **TUROVSKIY, Ro-**
man [US/US]; 240 N. Lake Merced Hills, San Francisco,
California 94132 (US). **NGO, Thuan** [VN/US]; 215
Callan Street, Milpitas, California 95035 (US). **DAVIS,**
Matthew [US/US]; 441 Woodbine Lane, Danville, Cali-
fornia 94526 (US).

(74) Agents: **HESLIN, James M.** et al.; Townsend and
Townsend and Crew LLP, Two Embarcadero Center,

Eighth Floor, San Francisco, California 94111-3834
(US).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report (Rule 48.2(g))

(54) Title: IMPLANT DELIVERY APPARATUS AND METHODS WITH ELECTROLYTIC RELEASE

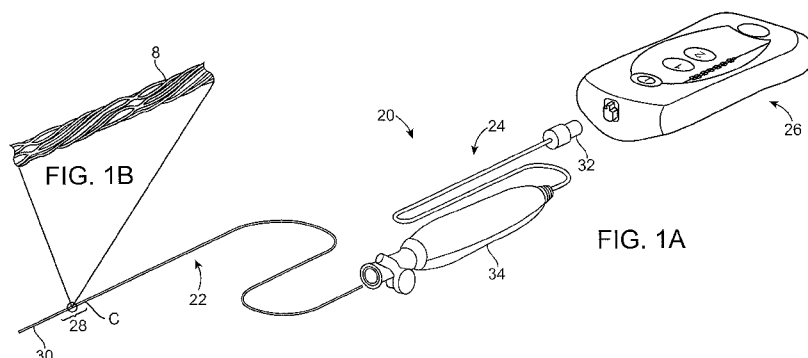

(57) Abstract: Implant release apparatus includes a connector connecting a lead having an electrolytically erodable portion and a restraint that restrains the implant. In one embodiment, the connector can include or comprise a nonconductive member.