

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 December 2003 (18.12.2003)

PCT

(10) International Publication Number
WO 03/104701 A1

(31) International Patent Classification⁷: **F16L 5/00**,
5/02, 5/14, H02G 3/22

(21) International Application Number: PCT/SE03/00772

(22) International Filing Date: 12 May 2003 (12.05.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0201704-4 5 June 2002 (05.06.2002) SE

(71) Applicant (for all designated States except US): **ROX-TEC INTERNATIONAL AB** [SE/SE]; Box: 540, S-371 23 Karlskrona (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KREUTZ, Tomas** [SE/SE]; Ringövägen 89, S-371 60 Lyckeby (SE).


(74) Agent: **STRÖM & GULLIKSSON IPC AB**; P.O. Box 4188, S-203 13 Malmö (SE).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: COMPRESSION UNIT

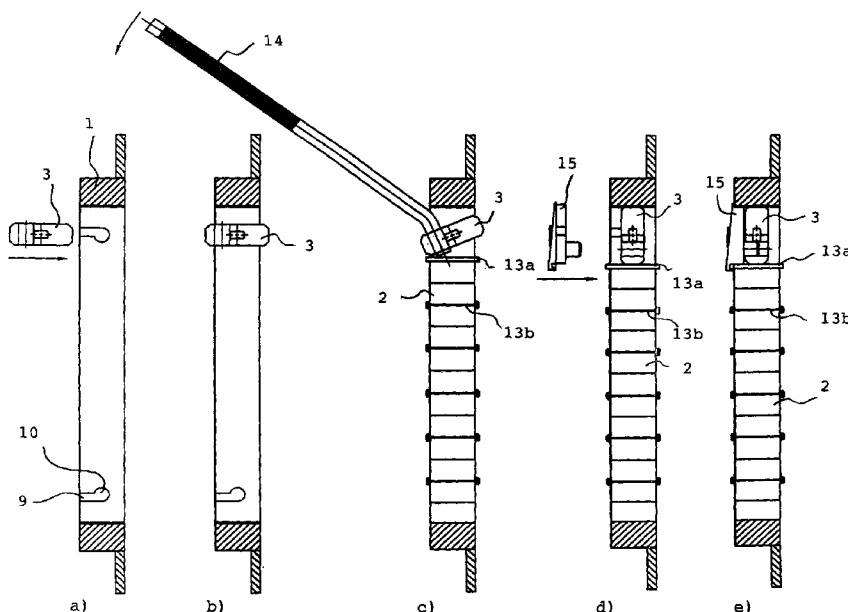

(57) Abstract: The present invention concerns a compression unit for a frame (1, 1'), receiving one or more separate units (2) for cable entries, pipe penetrations etc. The compression unit comprises a compression plate (3, 3', 4) to be received in the frame. The compression plate (3, 3', 4) has protrusions (5, 5') to be received in grooves (9, 10, 9', 10') of the frame (1, 1'). The grooves have a first straight part (9, 9') and a second rounded part (10, 10'). To put the compression plate (3, 3', 4) in a compressing position, the compression plate (3, 3', 4) is turned by use of a suitable tool (14), when the protrusions (5, 5') are in the rounded parts (10, 10') of the grooves.