



- (51) **International Patent Classification:**
H01F 27/36 (2006.01) *H01F 38/14* (2006.01)
B60L 11/18 (2006.01)
- (21) **International Application Number:**
PCT/EP2015/053233
- (22) **International Filing Date:**
16 February 2015 (16.02.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
1402761.9 17 February 2014 (17.02.2014) GB
- (71) **Applicant:** **BOMBARDIER TRANSPORTATION GMBH** [DE/DE]; Schöneberger Ufer 1, 10785 Berlin (DE).
- (72) **Inventors:** **WHALEY, John**; 67 Scarborough Road, North Yorkshire, Filey YO14 9NQ (GB). **GAO, Jing**; Mannheimstr. 109, 68519 Viernheim (DE).
- (74) **Agent:** **PATENTANWÄLTE BRESSEL UND PARTNER MBB**; Potsdamer Platz 10, 10785 Berlin (DE).

- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

[Continued on next page]

- (54) **Title:** A VEHICLE AND A METHOD OF MANUFACTURING A VEHICLE

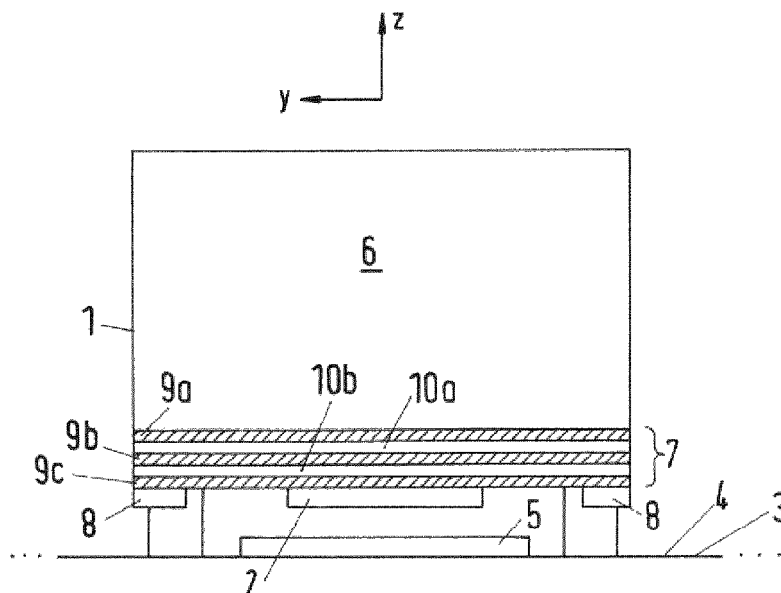


Fig.1

(57) **Abstract:** The invention relates to a vehicle, wherein the vehicle (1) comprises at least one receiving device (2) of a system for inductive power transfer, wherein the vehicle (1) comprises a cabin section (6), wherein at least one shielding layer (9a, b, 9c) is arranged between the receiving device (2) and the cabin section (6), wherein the vehicle (1) comprises a floor section (7), wherein the at least one shielding layer (9a, 9b, 9c) is integrated into the floor section (7) of the vehicle (1). The invention also relates to a method of manufacturing a vehicle (1).

WO 2015/121474 A1



Published:

— *with international search report (Art. 21(3))*