

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 April 2001 (12.04.2001)


PCT

(10) International Publication Number
WO 01/25707 A1

- (51) International Patent Classification⁷: **F26B 5/16**,
B65D 81/26
- (21) International Application Number: PCT/SE00/01904
- (22) International Filing Date: 3 October 2000 (03.10.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
9903604-8 7 October 1999 (07.10.1999) SE
- (71) Applicant (for all designated States except US): **AUXILIUM JERSBY AB** [SE/SE]; Lahällsvägen 48 A, S-183 30 Täby (SE).
- (72) Inventor; and
(75) Inventor/Applicant (for US only): **JERSBY, Ralf** [SE/SE]; Högklintsvägen 7, S-183 77 Täby (SE).
- (74) Agent: **CONIMAR AB**; P.O. Box 2086, S-141 02 Huddinge (SE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,

[Continued on next page]

(54) Title: MOISTURE ABSORPTION APPARATUS

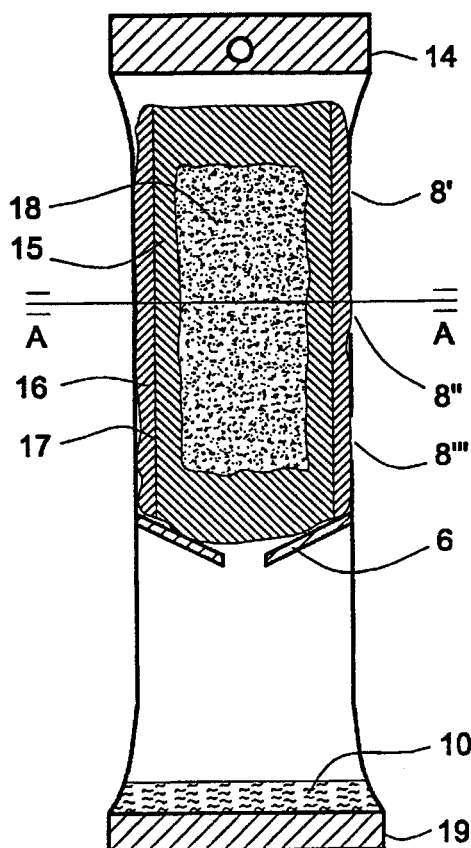

(57) Abstract: A moisture absorption apparatus comprises an elongate flexible plastic tube (1) having sealed upper and lower end portions (4, 7), one or several wall openings (8; 8', 8'', 8''') disposed in a wall portion adjacent to the upper end portion (4), a tubular desiccant container having gas and liquid permeable walls (15, 16; 23) disposed radially inwardly of said one or several wall openings (8; 8', 8'', 8'''), and spacer means (16; 24) interposed between the tube wall (20) and the desiccant container or integrated (16) in the desiccant container to prevent liquid formed in the container from leaving the apparatus through the wall openings (8; 8', 8'', 8''').

WO 01/25707 A1



IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *With international search report.*
- *Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.*