

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 December 2008 (24.12.2008)

PCT

(10) International Publication Number
WO 2008/156845 A1

(51) International Patent Classification:
F28F 9/013 (2006.01)

(21) International Application Number:

PCT/US2008/007728

(22) International Filing Date: 20 June 2008 (20.06.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/812,562 20 June 2007 (20.06.2007) US

(71) Applicant (for all designated States except US): **EXXON-MOBIL RESEARCH AND ENGINEERING COMPANY** [US/US]; 1545 Route 22 East, P.O. Box 900, Annandale, NJ 08801-0900 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WANNI, Amar, S.** [US/US]; 8131 Shadwell Park Lane, Falls Church, VA 22042 (US). **RUDY, Thomas, M.** [US/US]; 8336 Stable Gate Road, Warrenton, VA 20186 (US).

(74) Agents: **BAKUN, Estelle, C.** et al.; Exxonmobil Research And Engineering Company, 1545 Route 22 East, P.O. Box 900, Annandale, NJ 08801-0900 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,

[Continued on next page]

(54) Title: ANTI-VIBRATION TUBE SUPPORT WITH LOCKING ASSEMBLY

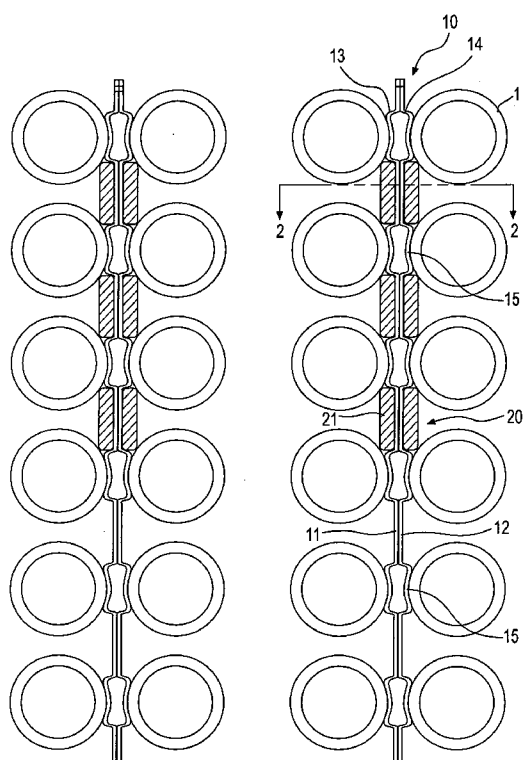


FIG. 1

(57) Abstract: A support device (10) for a bundle of elongated members comprising an elongated support (11, 12) adapted to be located between adjacent spaced rows of elongated members (1), having a first and a second side, wherein the first side is positioned adjacent one row of elongated members (1) and the second side is positioned adjacent another row of elongated members (1), and a plurality of support members spaced along the elongated support, wherein each support member (13, 14) have a first supporting assembly (13) located on the first side for supporting one of the elongated members in the one row and a second supporting assembly (14) located on the second side for supporting one of the elongated members in the other row, and at least one locking assembly (20) for locking the support device (10) between the adjacent rows of elongated members, wherein each of the locking assembly is located on at least one of the first side and the second side between adjacent supporting assemblies (13, 14).

WO 2008/156845 A1



NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

Published:

— *with international search report*