



- (51) **International Patent Classification:**
E05B 67/38 (2006.01) *E05B 67/06* (2006.01)
- (21) **International Application Number:**
PCT/FI2014/050484
- (22) **International Filing Date:**
18 June 2014 (18.06.2014)
- (25) **Filing Language:** Finnish
- (26) **Publication Language:** English
- (30) **Priority Data:**
20135715 28 June 2013 (28.06.2013) FI
- (71) **Applicant:** ABLOY OY [FI/FI]; Wahlforssinkatu 20, FI-80100 Joensuu (FI).
- (72) **Inventors:** KYLLÖNEN, Veli-Pekka; Hirviseläntie 6, FI-80780 Kontioniemi (FI). VIITANEN, Veikko; Puro-suunkatu 4 B 29, FI-80160 Joensuu (FI). HEDMAN, Toni; Lampitie 11 A, FI-81100 Kontiolahti (FI).
- (74) **Agent:** BERGGREN OY AB; P.O. Box 16, (Antinkatu 3 C), FI-00101 Helsinki (FI).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CL, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

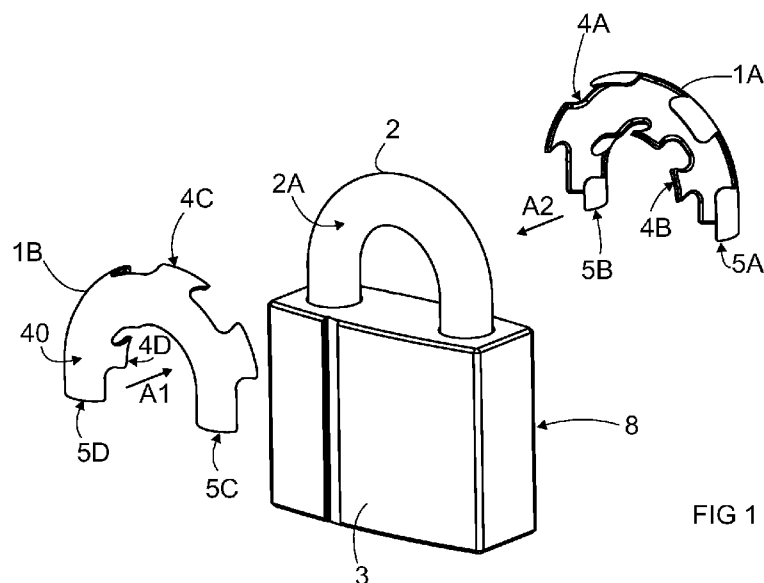
(54) **Title:** PADLOCK PROTECTOR

FIG 1

(57) **Abstract:** The invention relates to a padlock protector comprising a shackle protector. The shackle protector is composed from two parts. The parts are to be placed to the opposite sides of the shackle, and they are formed into the shape of the loop and surface of the shackle. The side edges of the parts are jigsaw puzzle edges in their shape.