



(51) International Patent Classification:
H04N 1/44 (2006.01)

(21) International Application Number:
PCT/IB2011/052799

(22) International Filing Date:
24 June 2011 (24.06.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1010735.7 25 June 2010 (25.06.2010) GB

(71) Applicant (for all designated States except US): **OMAR-CO NETWORK SOLUTIONS LIMITED** [GB/GB];
First Floor, Millennium House, Victoria Road, Douglas
IM2 4RW (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **OMAR, Ralph Mahmood** [US/GB]; 3rd Floor, Heliport House, 38 Lombard
Road, London SW11 3RP (GB).

(74) Agents: **AHMAD, Sheikh** et al.; Keltie, Fleet Place
House, 2 Fleet Place, London EC4M 7ET (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(88) Date of publication of the international search report:
16 February 2012

(54) Title: DATA TRANSMISSION SECURITY IMPROVEMENTS

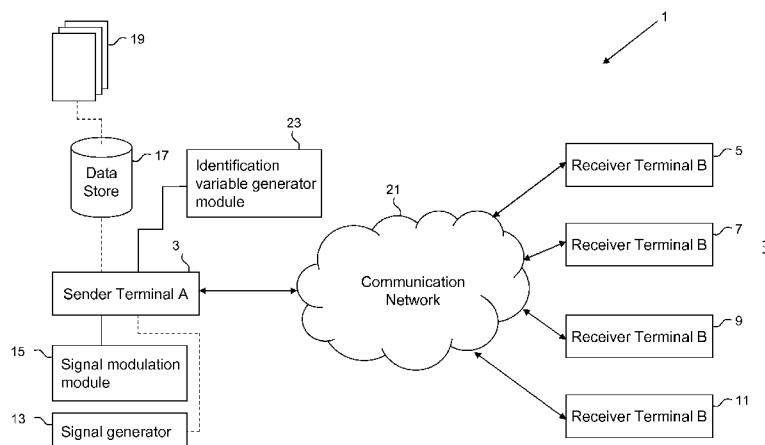


Fig. 1

(57) Abstract: Securely transmitting communication information from a first terminal operating in a first coordinate measurement domain to a second remotely-located terminal operating in a second coordinate measurement domain includes: combining the communication information with extraneous information to create a data signal; determining a value of an identification variable expressed with respect to the first coordinate measurement domain, the identification variable value enabling the location of the communication information concealed within the data signal to be determined; transmitting the data signal and the identification variable value from the first terminal to the second terminal; using a coordinate transform function configured to map coordinate values from the first coordinate measurement domain to the second coordinate measurement domain to calculate a value of the received identification variable expressed with respect to the second coordinate measurement domain; and extracting the information from the received data signal using the calculated identification variable value.

