



- (51) International Patent Classification:
F02C 3/00 (2006.01) *F02K 3/00* (2006.01)
F02C 7/00 (2006.01)
- (21) International Application Number:
PCT/US2013/033036
- (22) International Filing Date:
20 March 2013 (20.03.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/429,671 26 March 2012 (26.03.2012) US
- (71) Applicant: UNITED TECHNOLOGIES CORPORATION [US/US]; One Financial Plaza, Hartford, CT 06101 (US).
- (72) Inventors: COFFIN, James B.; 35 Hobson Avenue, Windsor, CT 06095 (US). DOMONKOS, Richard E.; 54 Two Brook Road, Wethersfield, CT 06109 (US). SHARMA, Sunil; 10 Augusta Circle, Rocky Hill, CT 06067 (US).
- (74) Agent: GOTTSCHALK, William S.; Carlson, Gaskey & Olds/Pratt & Whitney, c/o CPA Global, P.O. Box 52050, Minneapolis, MN 55402 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: TORQUE FRAME BUSHING ARRANGEMENT FOR GAS TURBINE ENGINE FAN DRIVE GEAR SYSTEM

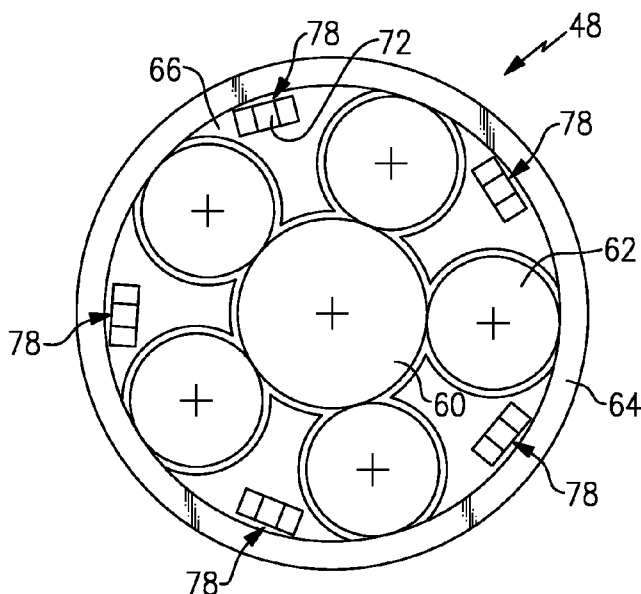


FIG. 2

(57) Abstract: A fan drive gear system for a gas turbine engine includes a carrier that supports circumferentially arranged gears. A torque frame has circumferentially arranged fingers with each finger including a bore having a bore axis. A bushing is arranged in each bore and provides an aperture. At least one bushing has a bushing axis offset from the bore axis. A pin is disposed in the aperture and secures the carrier to the torque frame.



Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))