




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A01M 1/20, A61L 9/03	A1	(11) International Publication Number: WO 99/66791 (43) International Publication Date: 29 December 1999 (29.12.99)
<p>(21) International Application Number: PCT/US99/13090</p> <p>(22) International Filing Date: 10 June 1999 (10.06.99)</p> <p>(30) Priority Data: 09/102,135 22 June 1998 (22.06.98) US</p> <p>(71) Applicant: S.C. JOHNSON & SON, INC. [US/US]; 1525 Howe Street, Racine, WI 53403 (US).</p> <p>(72) Inventors: O'ROURKE, Lynn, M.; 4136 Eastridge Drive, Janesville, WI 53546 (US). MIKKONEN, John, W.; 7100 Mariner Drive #104, Racine, WI 53406 (US). DAVIS, Brian, T.; 540 Madison Street, Burlington, WI 53105 (US). GATZEMBEYER, John, J.; 85 Rohill Road, Neshanic Station, NJ 08853 (US).</p> <p>(74) Agents: HOUSER, David, J. et al.; S.C. Johnson & Son, Inc., Patent Section, 1525 Howe Street, MS 077, Racine, WI 53403 (US).</p>	<p>(81) Designated States: AU, BR, CN, CZ, HU, ID, IL, IN, JP, KR, MX, NO, NZ, PL, RU, SG, SK, TR, UA, VN, ZA, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report.</i></p>	

(54) Title: VOLATILE CARRIER FOR USE WITH A HEATING DEVICE

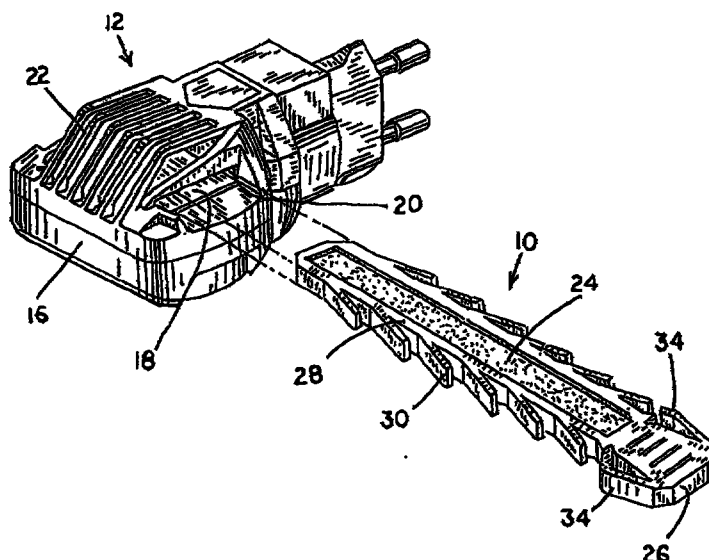

(57) Abstract

A volatile carrier (10) for supplying a volatile ingredient to a heating device (12) to be dispensed thereby, the heating device (12) having a heat transfer site and a pass-through path to receive an inserted volatile carrier at one end of the pass-through path to position the volatile carrier adjacent to the heat transfer site. The volatile carrier has a substantially unitary reservoir block containing a supply of the volatile ingredient. The reservoir block is greater in size than the heat transfer site. An advancement device is supplied by which a user can manually advance the reservoir block past the heat transfer site to expose different portions of the reservoir block to heat. A method of supplying a volatile ingredient to such a heating device by use of such a volatile carrier is also described.