



(51) International Patent Classification:
E04B 1/32 (2006.01)

(21) International Application Number:
PCT/US2011/029291

(22) International Filing Date:
22 March 2011 (22.03.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/659,886 24 March 2010 (24.03.2010) US

(71) Applicant (for all designated States except US): **M.I.C. INDUSTRIES, INC.** [US/US]; 11911 Freedom Drive, One Fountain Square, Reston, VA 20190 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ANDERSON, Todd, E.** [US/US]; 1020 Edgewood Drive, Duncansville, PA 16635 (US). **MORELLO, Frederick** [US/US]; 304 Terlyn Drive, Johnstown, PA 15904 (US).

(74) Agents: **CORUZZI, Laura, A.** et al.; Jones Day, 222 East 41st Street, New York, NY 10017-6702 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SYSTEM AND METHOD FOR ATTACHING A WALL TO A BUILDING STRUCTURE

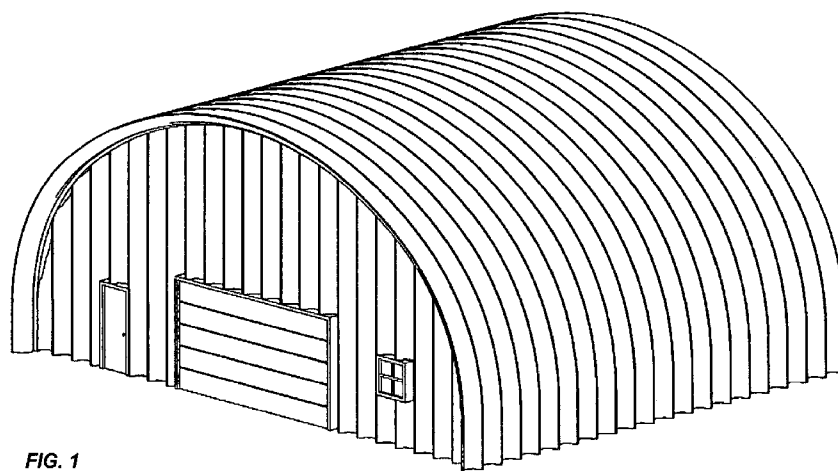


FIG. 1

(57) Abstract: An attachment member formed from sheet material configured to connect a wall to a curved roof of a building structure. The attachment member includes at least two segments: a first segment having a flat center portion and a pair of walls extending perpendicular to the center portion in cross section, the pair of walls defining a recess oriented in a direction perpendicular to the center portion, wherein the recess is adapted to accommodate a portion of a wall of a building structure; and a second segment extending from one of the walls of the first segment, the second segment being oriented in a same plane as the flat center portion of the first segment in cross section, the second segment including a longitudinal rib, the longitudinal rib protruding in cross section from the second segment, the longitudinal rib being adapted to mate with a rib of a curved building panel.