



(51) International Patent Classification:

F24F 11/02 (2006.01) F24F 1/00 (2006.01)
F24F 11/00 (2006.01)

(21) International Application Number:

PCT/US2010/041532

(22) International Filing Date:

9 July 2010 (09.07.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/224,994 13 July 2009 (13.07.2009) US

(71) Applicant (for all designated States except US): **CARRIER CORPORATION** [US/US]; One Carrier Place, Farmington, CT 06034 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CHEN, Yu, H.** [US/US]; 4745 Edgeworth Drive, Manlius, New York 13104 (US). **GAN, Mingfei** [CN/US]; 4590 Red Fox Drive, Manlius, New York 13104 (US).

(74) Agent: **HABELT, William, W.**; 250 South Clinton Street, Suite 300, Syracuse, New York 13202 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: TRANSPORT REFRIGERATION SYSTEM, TRANSPORT REFRIGERATION UNIT, AND METHODS FOR SAME

100 ↘

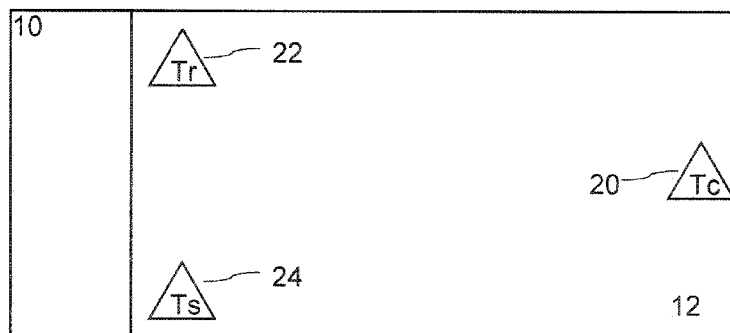


FIG. 1

(57) Abstract: Embodiments of systems, apparatus, and/or methods can control temperature within a transport refrigeration unit using remote sensor or sensors. Embodiments can monitor cargo temperature with remote sensor(s) and air temperature to adjust air delivery speed or cooling capacity. Selected operation parameters can be determined with consideration of both energy conservation and/or cargo quality. Embodiments of systems, apparatus, and/or methods can control temperature within a transport refrigeration unit using a first selected mode of operation or a second mode of operation.

