

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 September 2001 (20.09.2001)

PCT

(10) International Publication Number
WO 01/69097 A2

(51) International Patent Classification⁷: **F16C 13/00**

(21) International Application Number: PCT/US01/07078

(22) International Filing Date: 5 March 2001 (05.03.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/525,607 14 March 2000 (14.03.2000) US

(71) Applicant: **THE GATES CORPORATION** [US/US];
900 South Broadway, Denver, CO 80209 (US).

(72) Inventors: **SERKH, Alexander**; 316 Falling Brook Drive,
Troy, MI 48098-4696 (US). **HODJAT, Yahya**; 410 North
Baldwin, Oxford, MI 48371-3410 (US).

(74) Agent: **THURNAU, Jeffrey**; The Gates Corporation, Mail
Stop: 31-4-1-A3, 900 S. Broadway, Denver, CO 80209
(US).

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ,
BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK,
DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL,
IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU,
LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT,
RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA,
UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE, TR).

Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: IDLER PULLEY

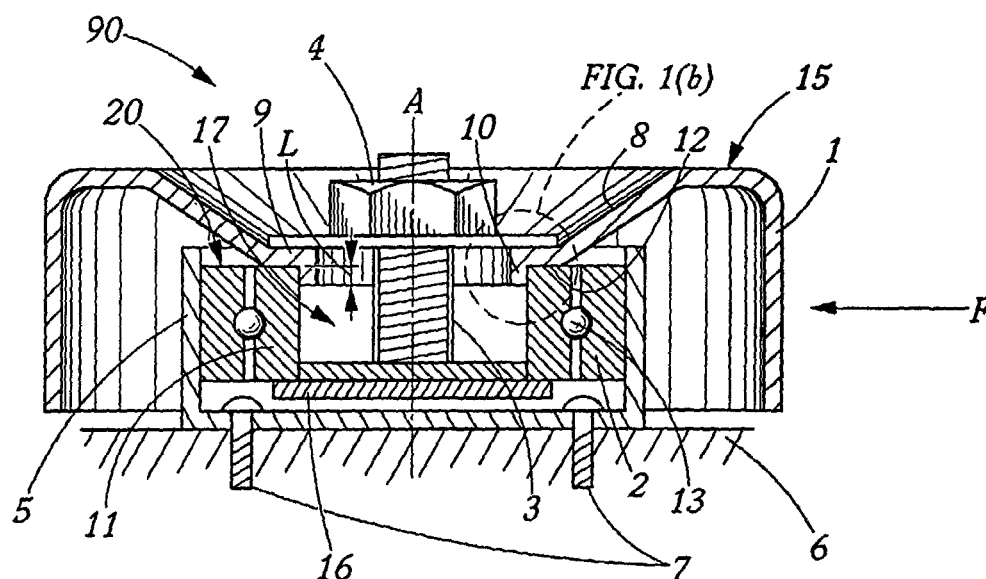

(57) **Abstract:** The invention comprises an idler pulley, the pulley having a web and a belt bearing surface connected to the web. The web is aligned with and affixed to an inner race outer surface of a bearing by a fastener. The pulley is stamped, formed or spun out of sheet metal and may have a central hole described by a lip for alignment with a central axis of the bearing. The outer race of the bearing may be affixed to a mounting surface.