

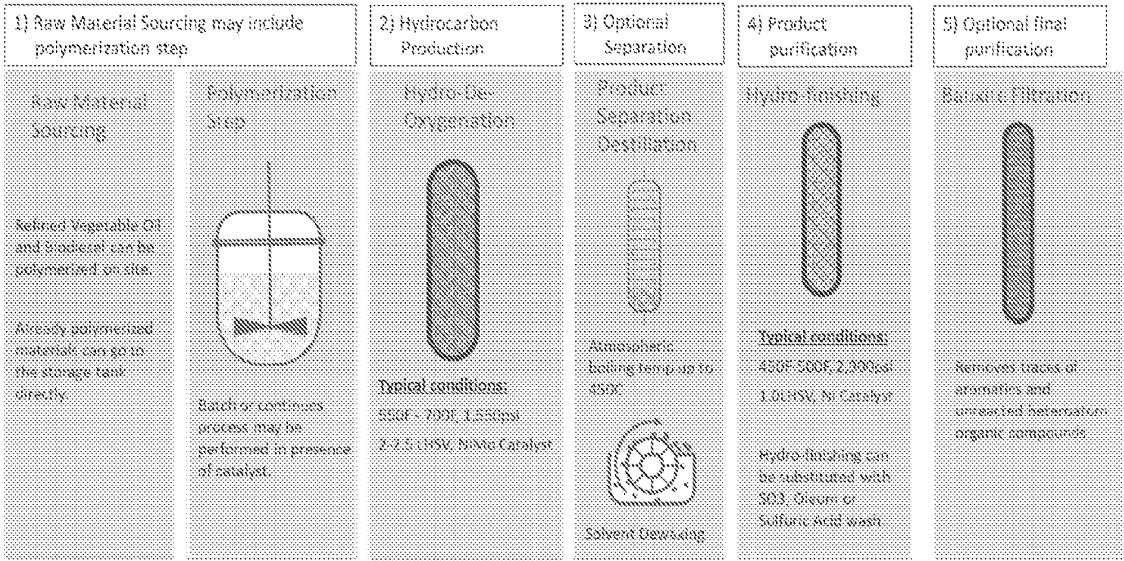


FIG. 1

2/4

		WA-60	WA-20	WA-6	WA-4
Density at 15 °C, kg/l	ASTM D4052	0.8565	0.8379	0.8072	0.8006
Viscosity at 40, cSt (SUS @100 °F)	ASTM D445	60.6 (280.6)	22.1 (97.7)	5.7 (26.4)	3.7 (17.1)
Viscosity at 100	ASTM D445	8.9	4.6	1.9	1.5
Viscosity Index	ASTM D2270	117	124	141	194
Flash Point, PM, C	ASTM D93	228	175.5	156	113
Color, Saybolt	ASTM D156	+25	+25	+25	+25
Limit for Aromatics and Polyaromatics	USP (white mineral oil monograph)	PASS	PASS	PASS	PASS
Readily Carbonizable Substances	USP (white mineral oil monograph)	PASS	PASS	PASS	PASS

FIG. 2

3/4

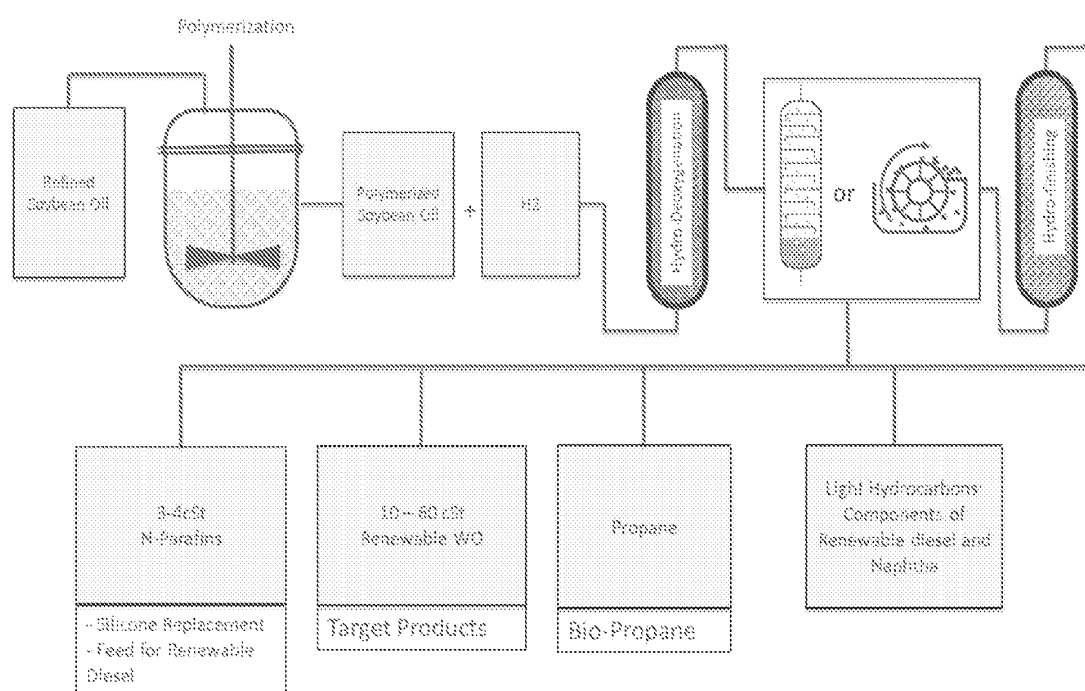


FIG. 3

4/4

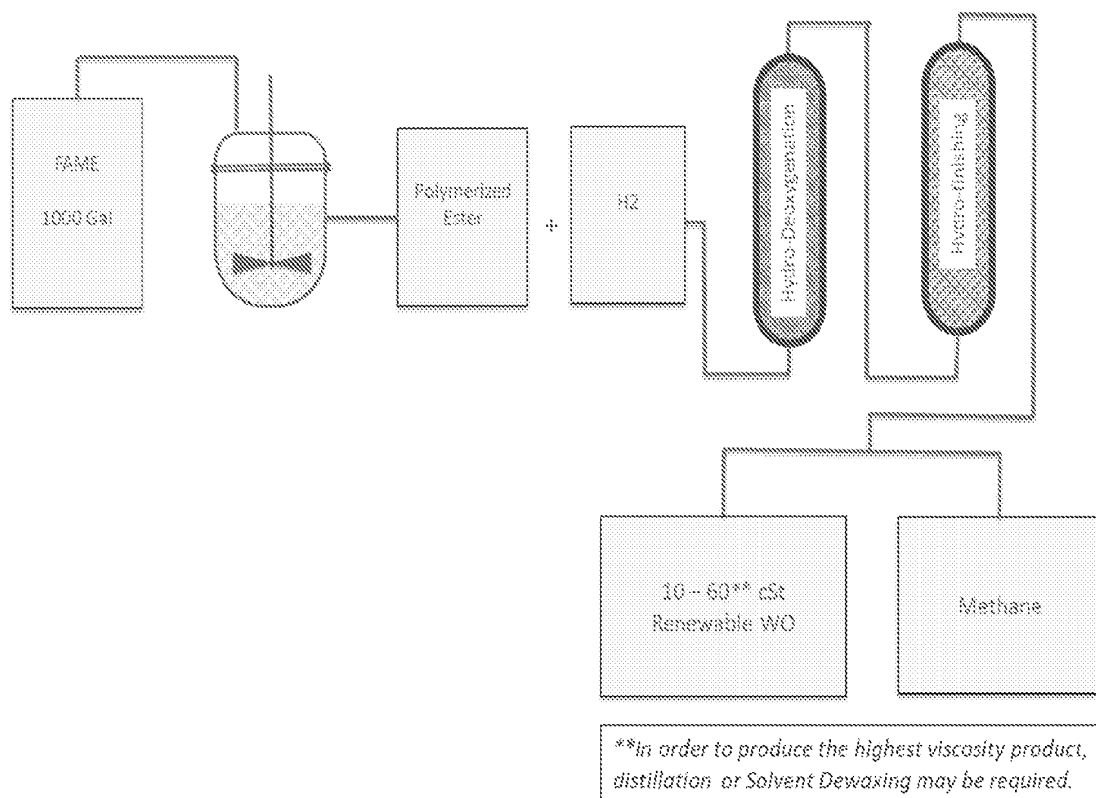


FIG. 4