

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
14 June 2018 (14.06.2018)



(10) International Publication Number
WO 2018/106119 A3

(51) International Patent Classification:
E21B 34/02 (2006.01)

(21) International Application Number:
PCT/NO2017/050313

(22) International Filing Date:
04 December 2017 (04.12.2017)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20161936 05 December 2016 (05.12.2016) NO

(71) Applicant: PETROLEUM TECHNOLOGY COMPAN-
NY AS [NO/NO]; Slettestrandveien 13, 4032 Stavanger
(NO).

(72) Inventor: HARESTAD, Kristian; Harestadveien 4, 4070
Randaberg (NO).

(74) Agent: ZACCO NORWAY AS; P.O.Box 2003 Vika, 0125
Oslo (NO).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: VALVE DEVICE AND METHOD

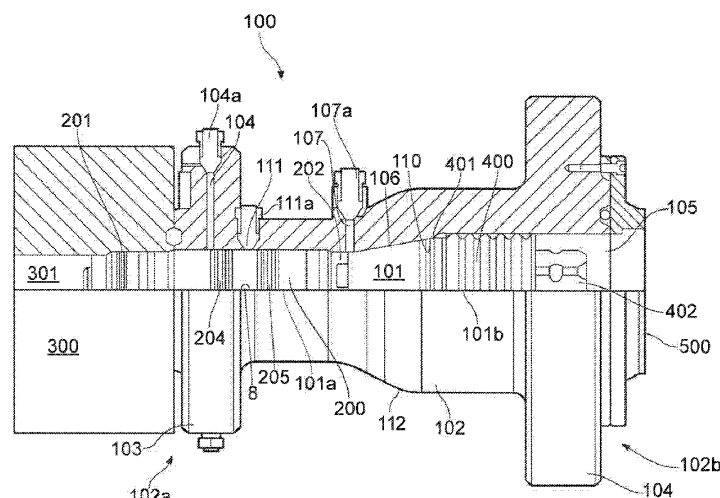


FIG. 3

(57) Abstract: A valve device (100) having a valve (200) with first connection elements (201) for mounting the valve (200) in a port (301) of a wellhead (300), a spool unit (102) having a through-channel (101), second connection elements (110) arranged in the through-channel (101), and a flange (103), the flange (103) configured for sealingly mounting the spool unit (102) to the wellhead (300), aligning the through-channel (101) with the port (301), and a plug (400) comprising third connection elements (401) configured for sealingly and removably engaging the second connection elements (110) and attach the plug (400) in the through-channel (101). A method for removing, replacing or arranging a valve (200) located in a port (301) of a wellhead (300) is also provided.

[Continued on next page]

WO 2018/106119 A3

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:

04 October 2018 (04.10.2018)