

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
21 July 2022 (21.07.2022)



(10) International Publication Number
WO 2022/152411 A1

(51) International Patent Classification:
H05K 7/20 (2006.01) *H02G 5/10* (2006.01)

(21) International Application Number:
PCT/EP2021/069381

(22) International Filing Date:
12 July 2021 (12.07.2021)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
17/148,776 14 January 2021 (14.01.2021) US


(71) Applicant: **LIQUIDSTACK HOLDING B.V.** [NL/NL];
STRAWINSKYLAAN 3051, 1077ZX AMSTERDAM
(NL).

(72) Inventor: **LAU, Kar-Wing**; Flat C, 33/F Tower 11, Tierra Verde, Tsing Yi, N.T., Hong Kong (CN).

(74) Agent: **BARKER BRETTELL LLP**; 100 Hagley Road, Edgbaston, Birmingham West Midlands B16 8QQ (GB).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(54) Title: BUSBAR ASSEMBLY FOR IMMERSION COOLING

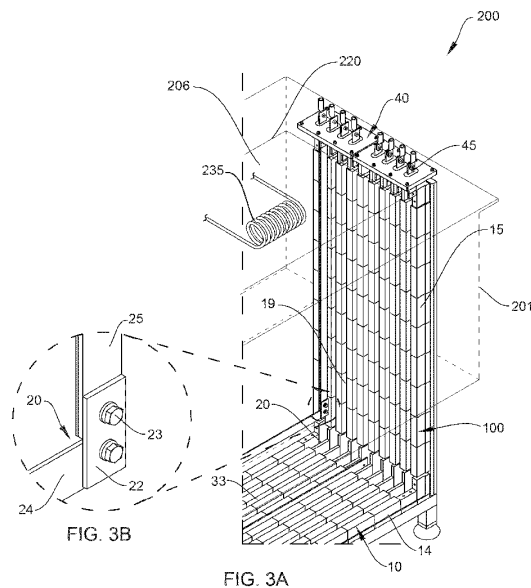

(57) Abstract: Embodiments of busbar assemblies for immersion cooling are described herein. In one embodiment, a busbar assembly (100) can include an insulator block (10) and a busbar (20). The insulator block can include a first barrier extending from a first end of the insulator block to a second end of the insulator block. The insulator block (10) can include a second barrier extending from the first end to the second end. The first barrier can include a first support surface. The second barrier can include a second support surface. The insulator block (10) can include a channel between the first barrier and the second barrier. The channel can extend from the first end to the second end. The busbar (20) can be positioned in the channel. The busbar may have a top surface that is recessed below the first support surface and the second support surface. Other examples may be described and claimed. To be accompanied, when published, by figure 3A of the drawings.

[Continued on next page]

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))