



(51) International Patent Classification:
B65D 88/30 (2006.01)

(21) International Application Number:
PCT/MY2013/000090

(22) International Filing Date:
24 April 2013 (24.04.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PI 2012001899 27 April 2012 (27.04.2012) MY

(71) Applicant: **DIALOG CONSTRUCTION SDN. BHD.**
[MY/MY]; 109 Block G, Phileo Damansara 1, No. 9 Jalan
16/11, 46350 Petaling Jaya, Selangor Darul Ehsan (MY).

(72) Inventor: **GALLAGHER, Phil;** c/o Dialog Construction
Sdn. Bhd., 109 Block G, Phileo Damansara 1, No. 9 Jalan
16/11, 46350 Petaling Jaya, Selangor Darul Ehsan (MY).

(74) Agent: **CHEW, Phye Keat;** c/o Raja, Darryl & Loh, 18th
Florr, Wisma Sime Darby, Jalan Raja Laut, 50350 Kuala
Lumpur (MY).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) Title: A BULK STORAGE CONTAINER

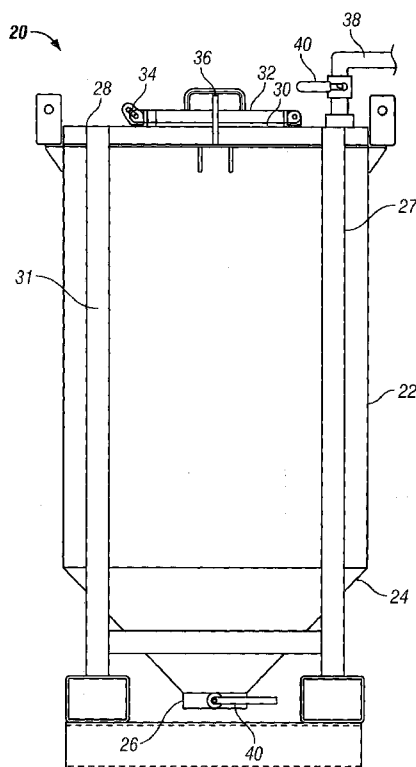


FIG. 2

(57) Abstract: An intermediate bulk storage container (1) for the storage or transport of particulate catalyst material comprises a vessel (2) having an inner wall defining a containment volume for particulate catalyst material. The vessel (20) comprises a cylindrical wall section (22), a top panel (28) closing the upper end of the cylindrical wall section (22) and a conical base section (24) connected to and tapering inwardly away from the lower end of the cylindrical wall section (22). An opening (30) is provided in the top panel (28) of the container (20) for receiving the catalyst material and a closure member (32) is provided for closing the opening (30). An air tight seal is provided when the opening (30) is closed by the closure member (32). A gas duct (38) is in fluid connection with the vessel (20) for supplying an inert gas to the sealed container (20) or removing gas from the vessel (20) to place the container (20) under a vacuum to mitigate the risk of combustion. The gas duct is closed by a valve (40) for transit or storage.



MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

— *of inventorship (Rule 4.17(iv))*

Published:

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii))*

— *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*