(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
12 February 2009 (12.02.2009)

PCT

(10) International Publication Number
WO 2009/019439 A1

(51) International Patent Classification:
A61M 5/20 (2006.01) *A61M 5/32* (2006.01)

(21) International Application Number:
PCT/GB2008/002580

(22) International Filing Date: 28 July 2008 (28.07.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0715459.4 8 August 2007 (08.08.2007) GB

(71) Applicant *(for all designated States except US)*: **CILAG GMBH INTERNATIONAL** [CH/CH]; Landis & Gyrstrasse 1, CH-6300 (CH).

(72) Inventor; and

(75) Inventor/Applicant *(for US only)*: **JENNINGS, Douglas, Ivan** [GB/GB]; 73 Redwing Rise, Royston, Hertfordshire SG8 7XU (GB).

(74) Agents: **TUNSTALL, Christopher, Stephen** et al.; Carpmaels & Ransford, 43-45 Bloomsbury Square, London WC1A 2RA (GB).


(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: INJECTION DEVICE

FIG. 3

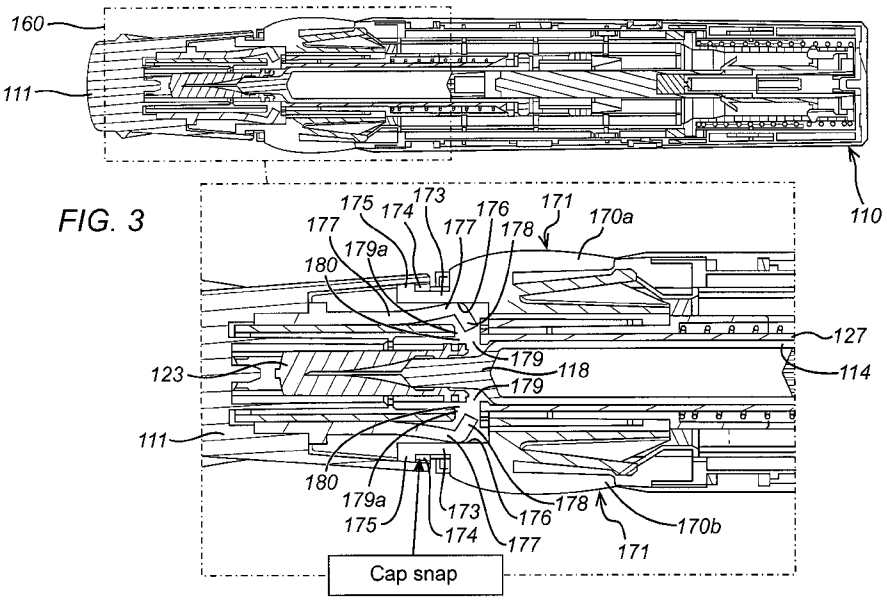

(57) Abstract: An injection device comprises a locking-mechanism in the form of two buttons (17) located on the front end of the injection device. In an engaged position, the locking mechanism prevents removal of a cap (111) from the injection device and, in a disengaged position, prevents movement of a syringe carrier (127) holding a syringe but permits removal of the cap from the housing. This assists in preventing damage to the syringe prior to actuation of the injection device.

WO 2009/019439 A1

Published:
— *with international search report*