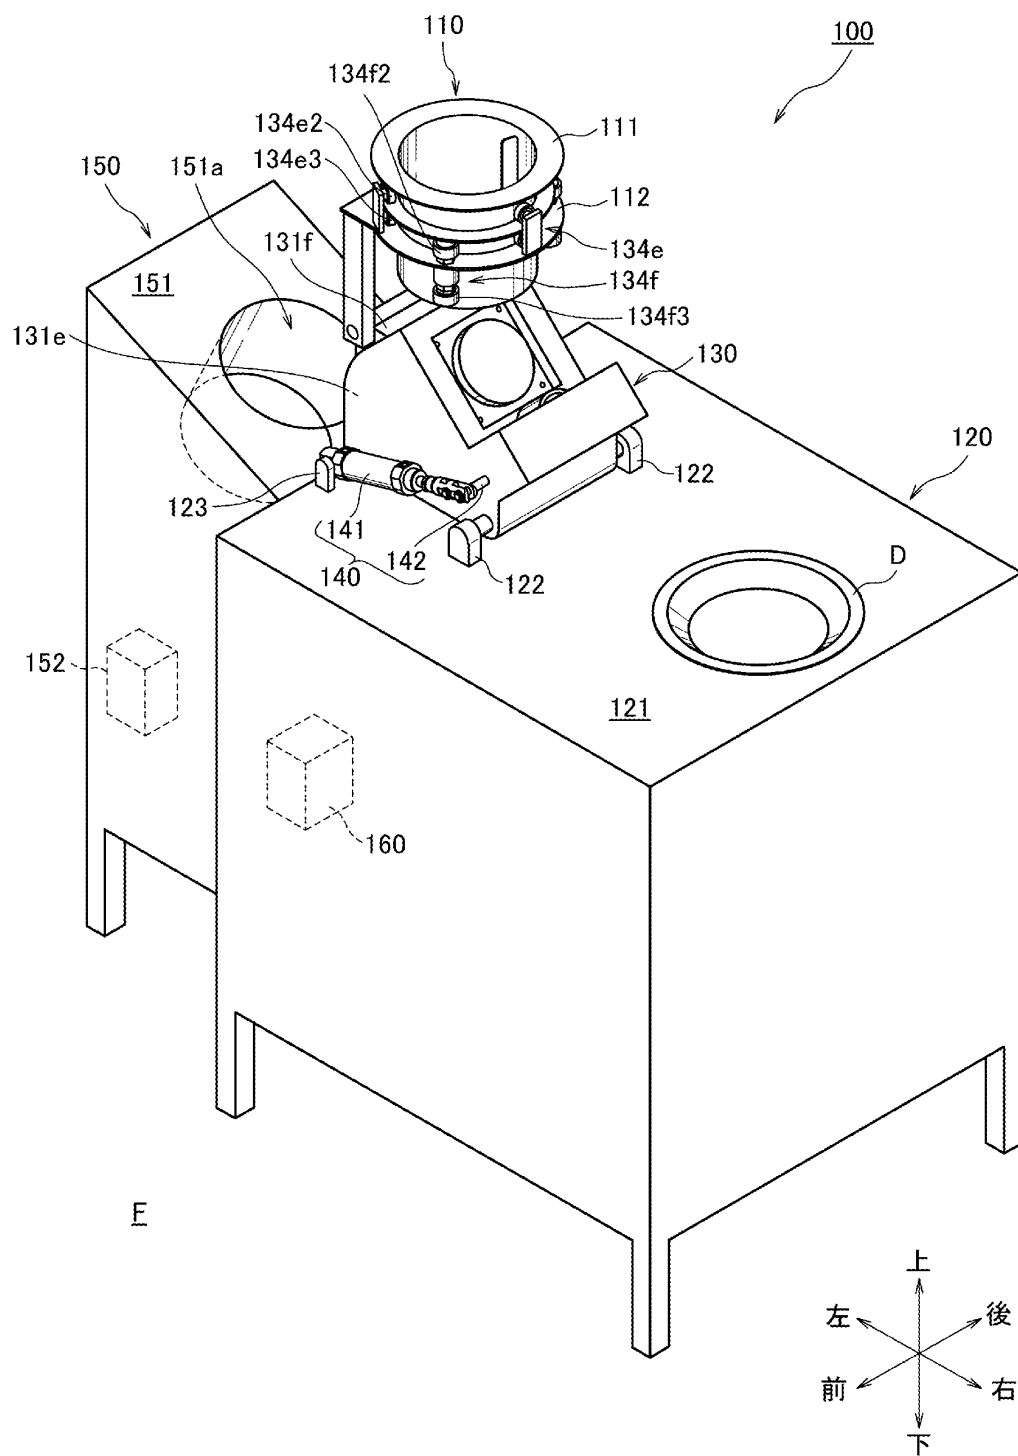


[図1]





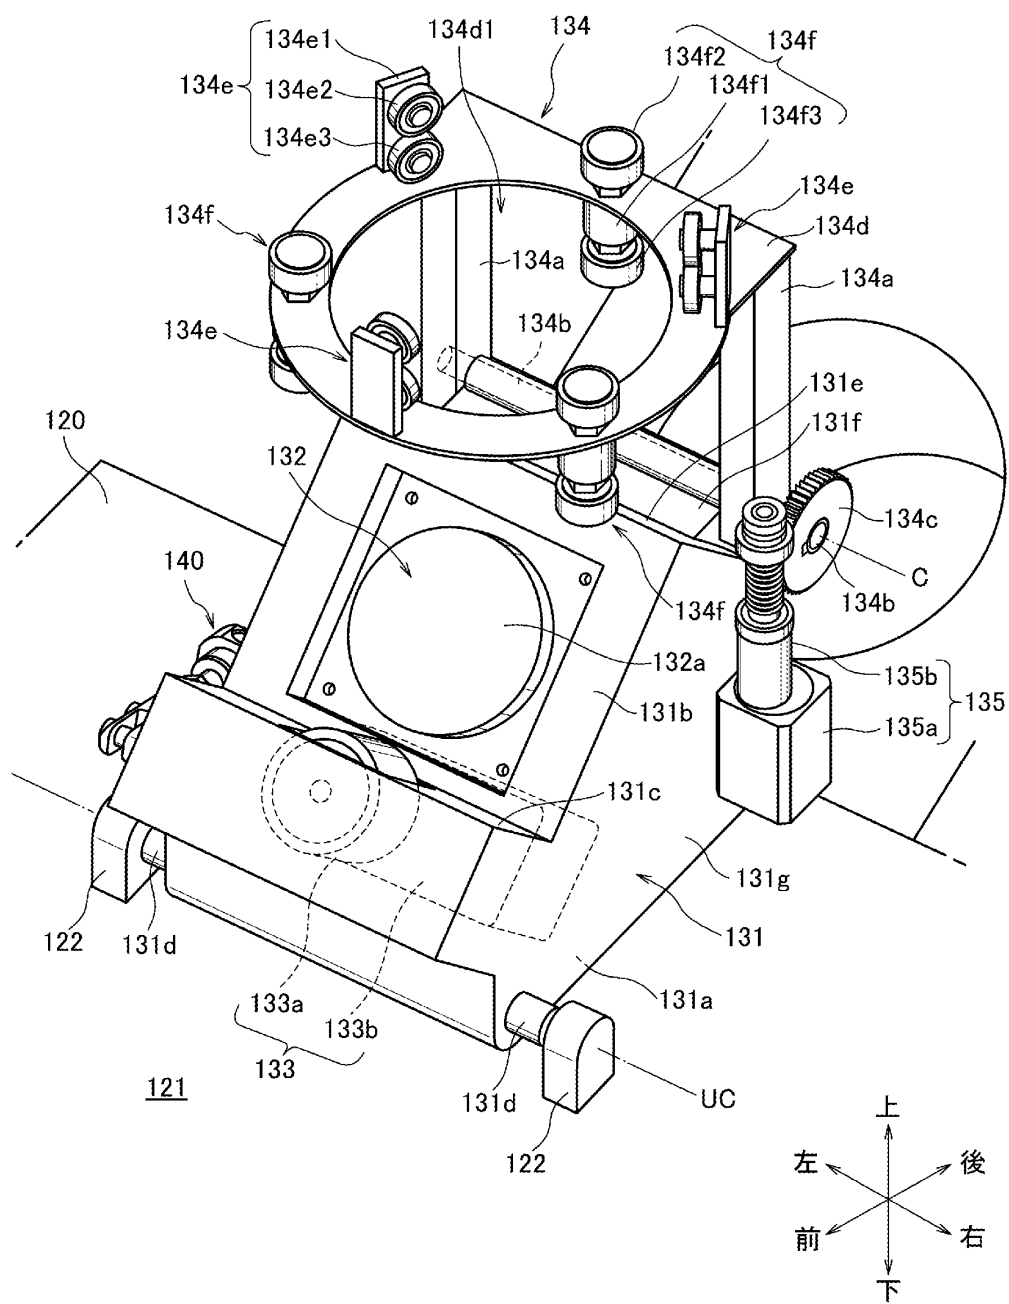


FIG. 10 is a top view of a circular device 110. The device includes a central circular component 113, which contains a sub-component 113a. A probe 116 is positioned near the central component. The device is defined by concentric circular boundaries: an inner solid line 111, a middle dashed line 112, and an outer solid line 117. Section lines III-B are indicated at the top and bottom of the device.

[図4]

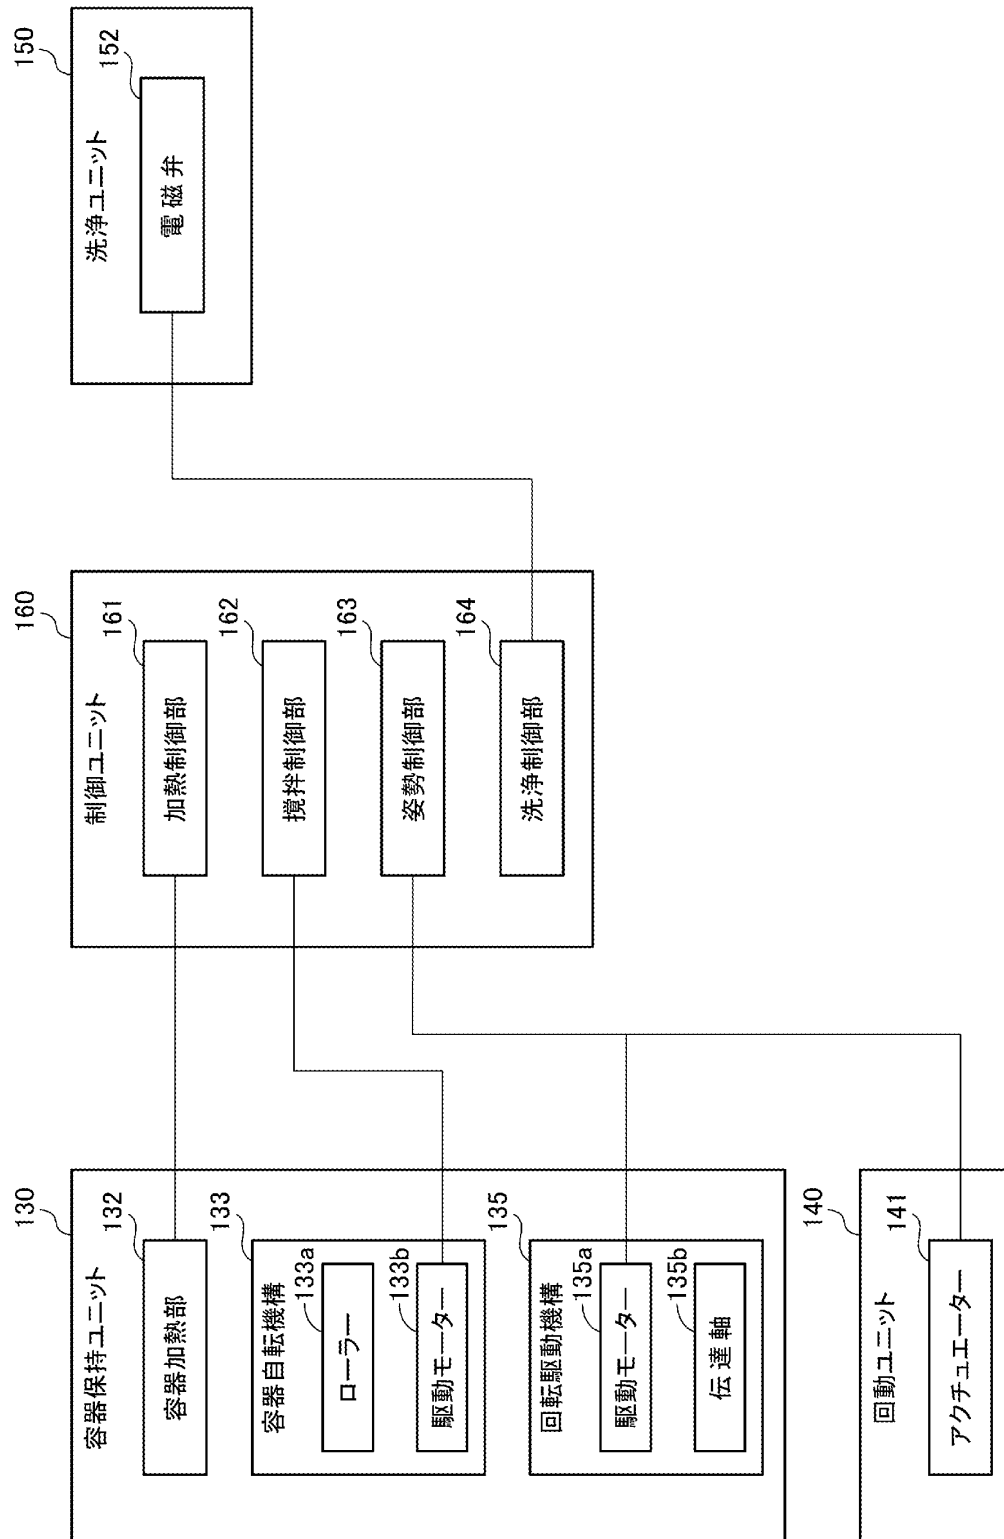


[図5]

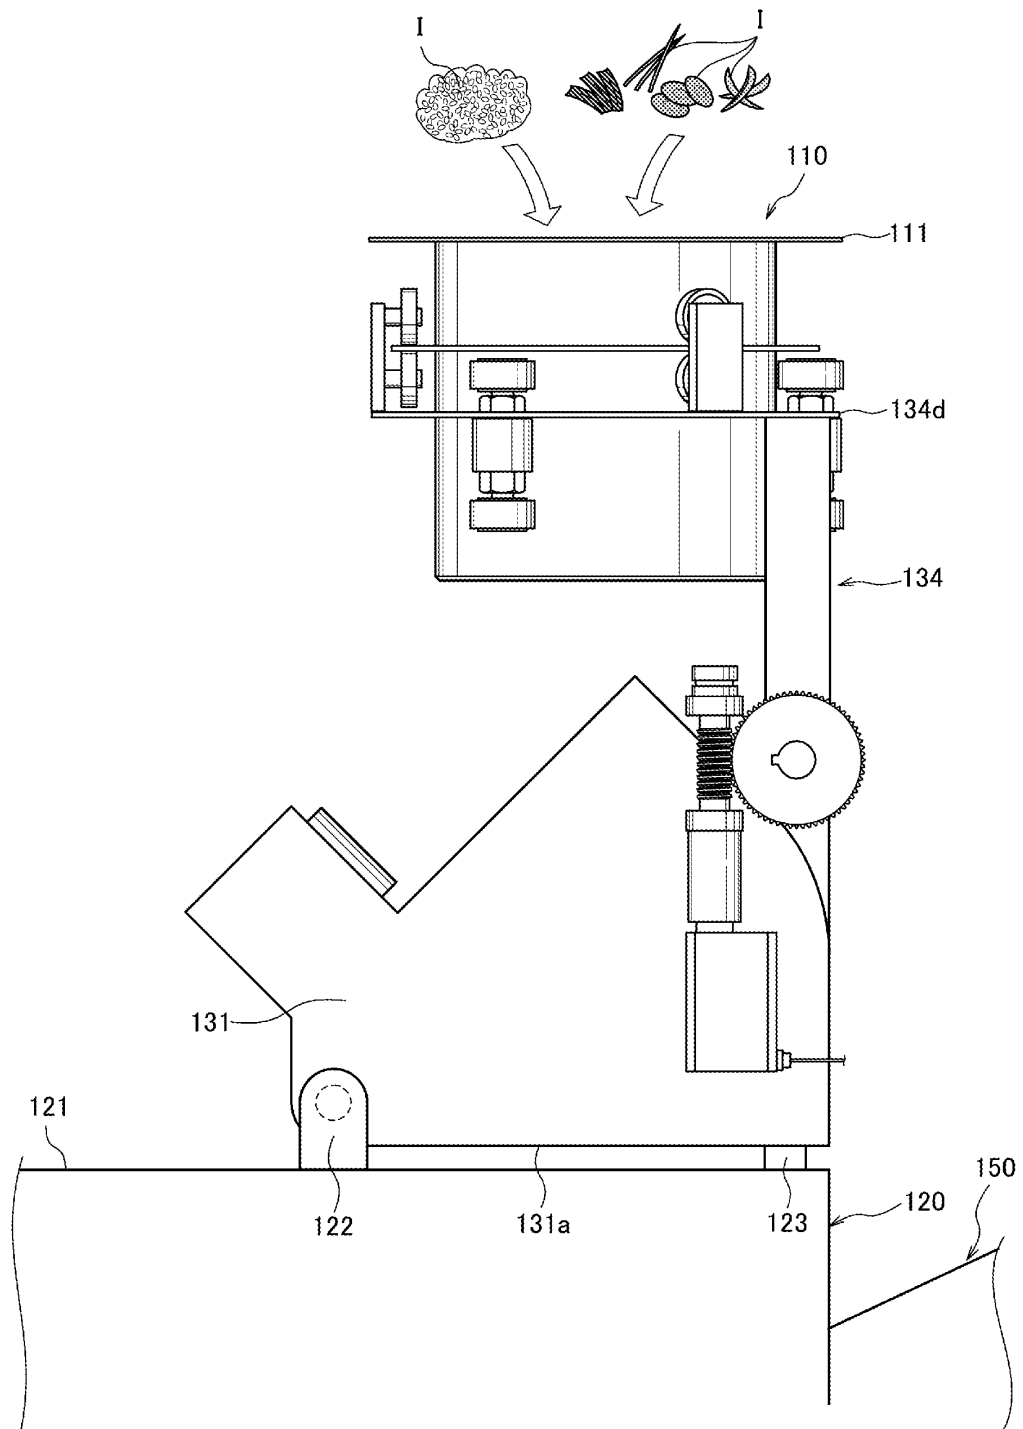


前 ← → 後

[図6A]

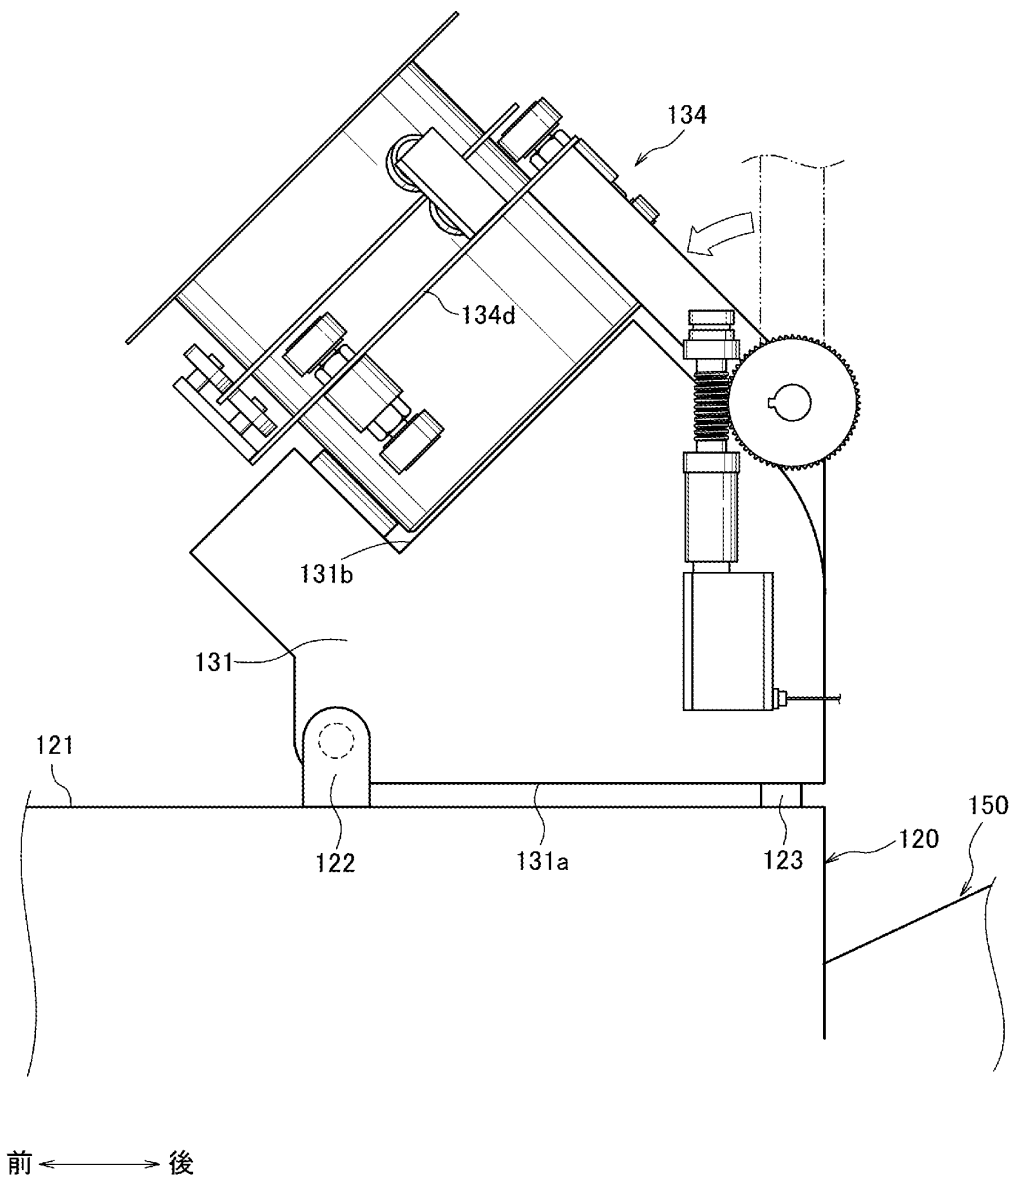


前 $\longleftrightarrow$ 後


[図6B]

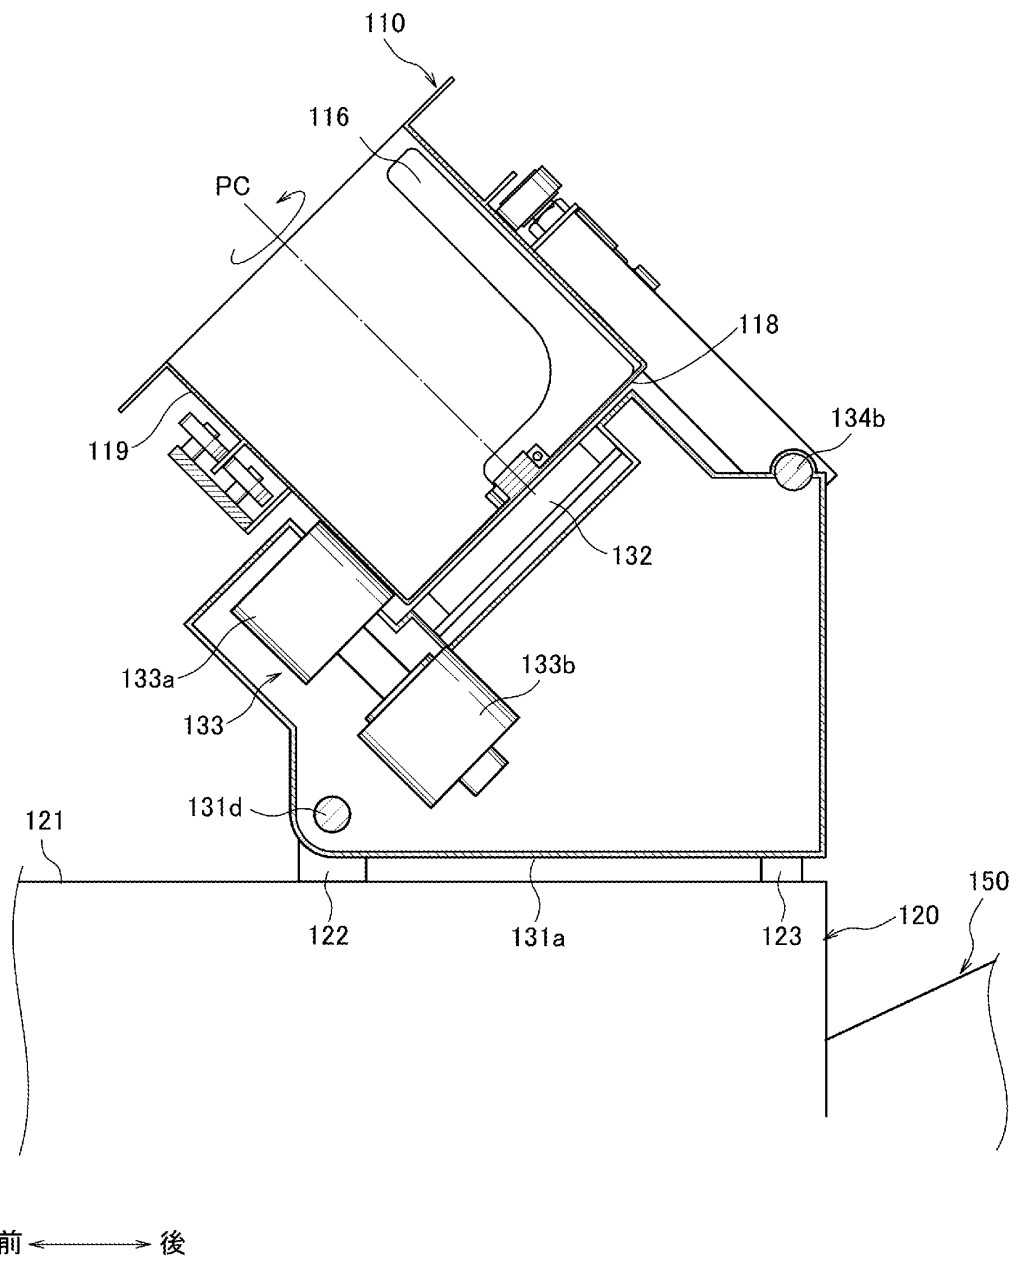


[図7]

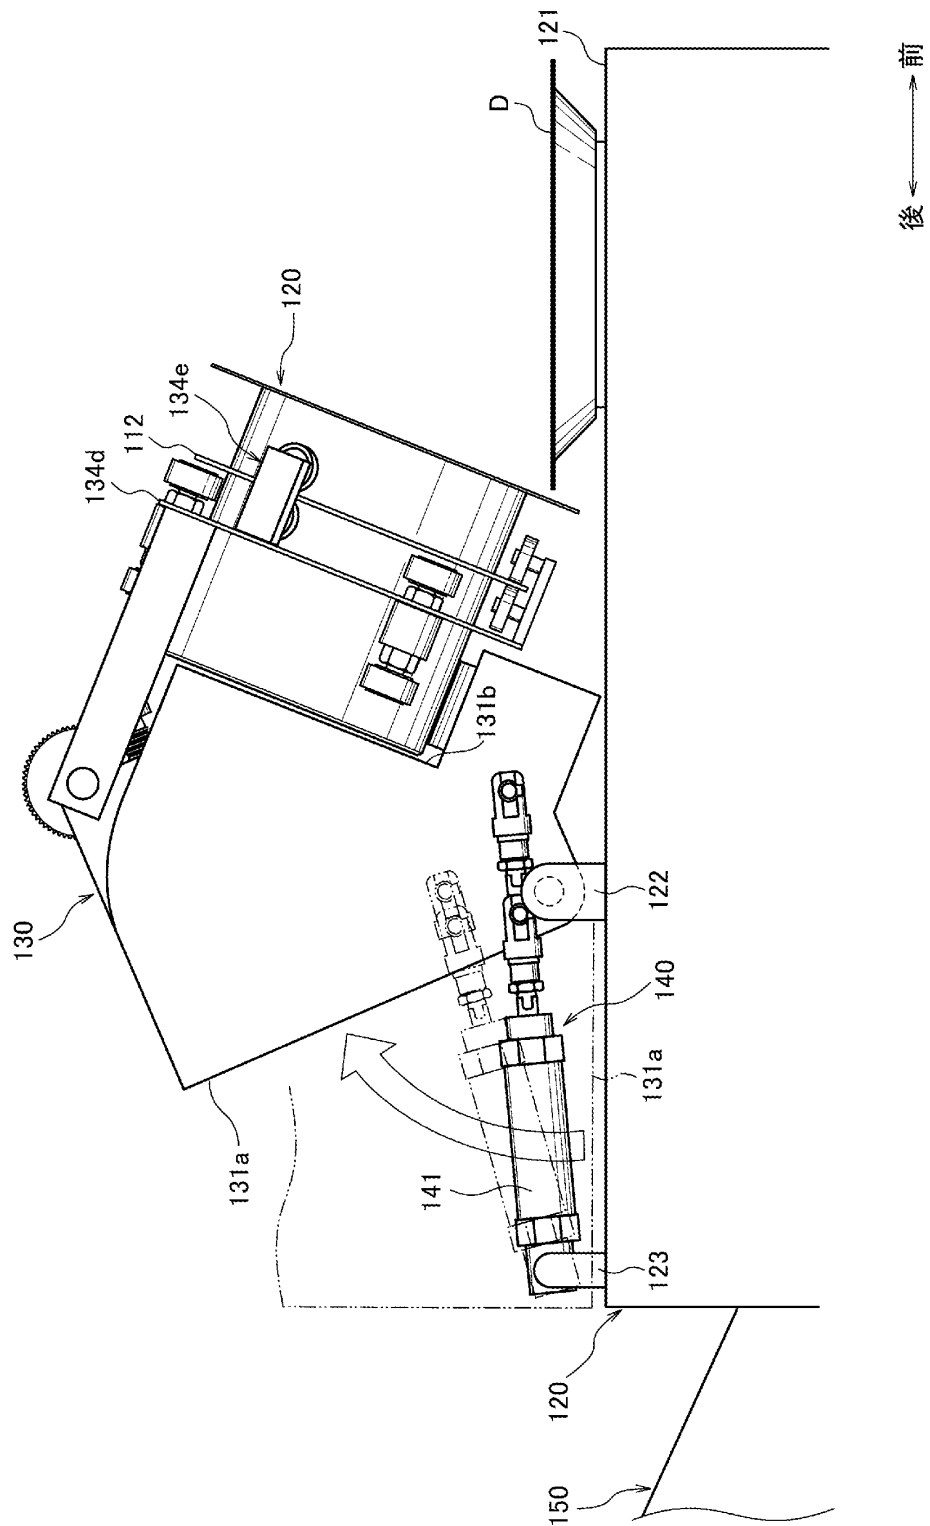

[図8]

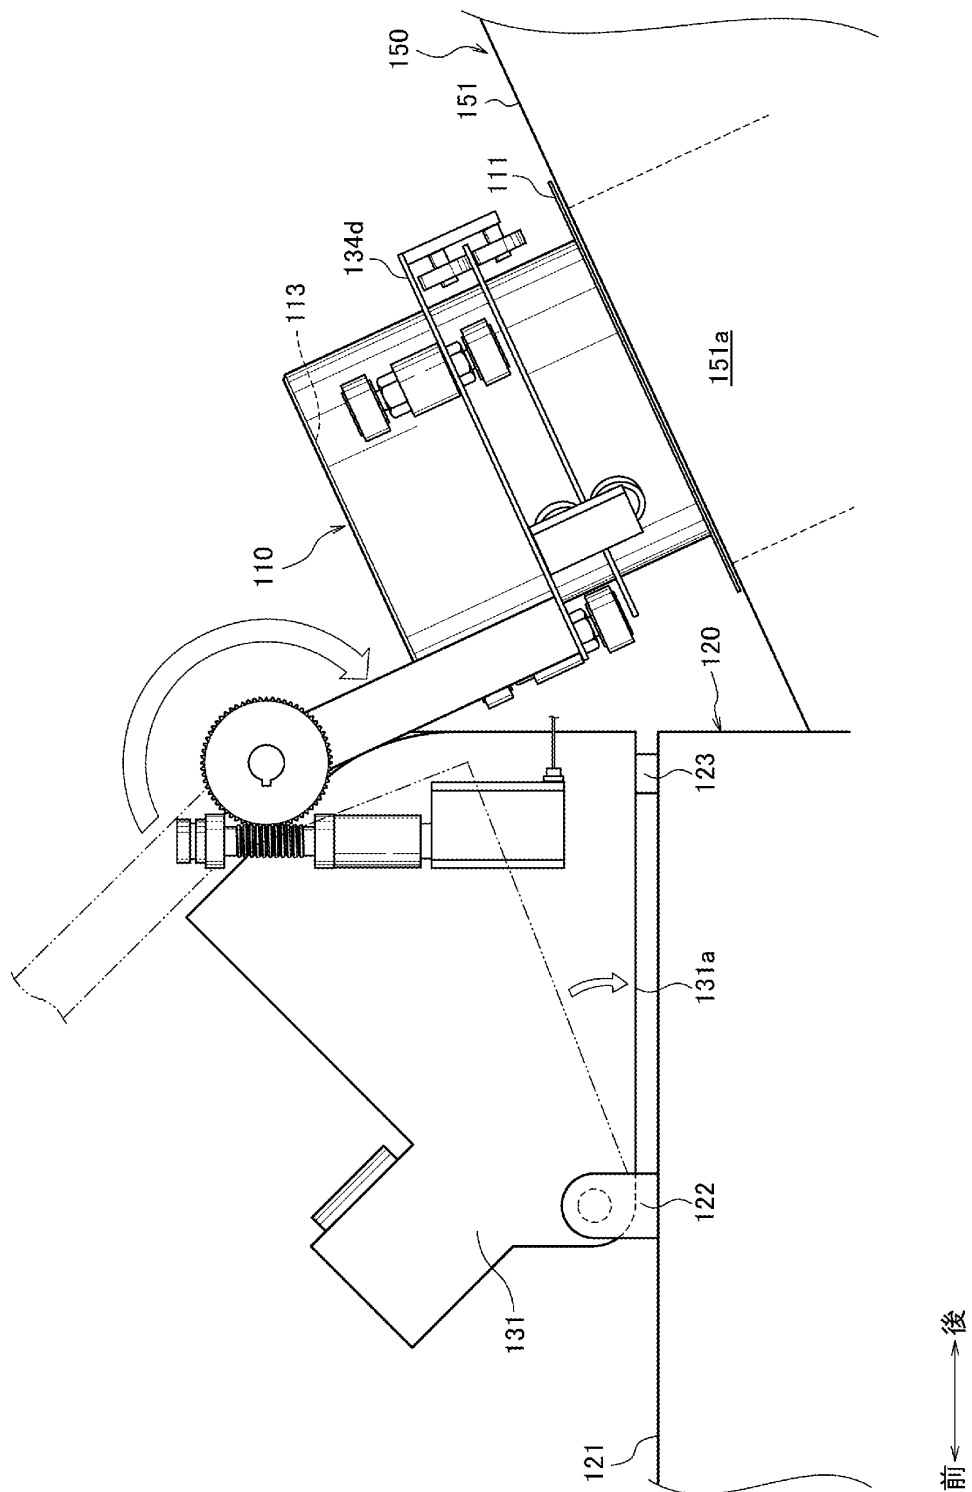

[図9A]

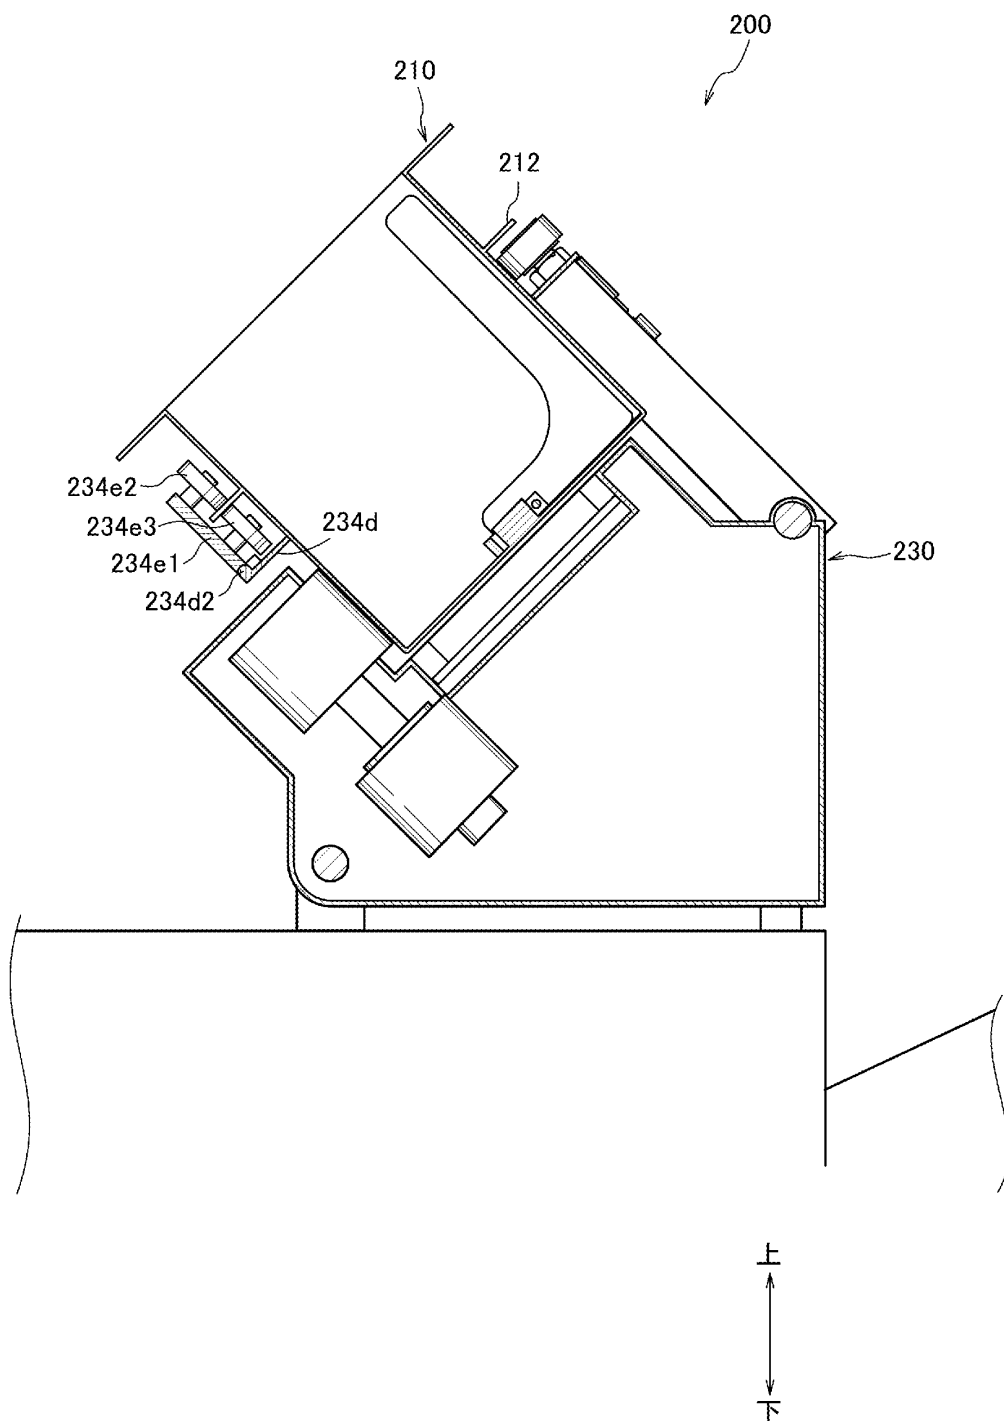

[図9B]

