

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



G00002

(43) International Publication Date
21 November 2002 (21.11.2002)

PCT

(10) International Publication Number
WO 02/092459 A2

(51) International Patent Classification⁷: **B65D 75/58**,
B32B 27/08

C/o Yugen Kaisha Obara Giken, 367-21, Azuma-cho
5-chome, Koshigaya-shi, Saitama 343-0826 (JP).

(21) International Application Number: PCT/JP02/04133

(74) Agent: **ISHIKAWA, Yasuo**; Park Shiba Building 4F,
17-11, Shiba 2-chome, Minato-ku, Tokyo-to 105-0014
(JP).

(22) International Filing Date: 25 April 2002 (25.04.2002)

(25) Filing Language: English

(81) Designated States (*national*): AU, CN, KR, NZ, SG, US,
ZA.

(26) Publication Language: English

(30) Priority Data:
2001-140543 10 May 2001 (10.05.2001) JP
2002-105714 8 April 2002 (08.04.2002) JP

(84) Designated States (*regional*): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE, TR).

Published:

— without international search report and to be republished
upon receipt of that report

(71) Applicant (*for all designated States except US*):
HOSOKAWA YOKO CO., LTD. [JP/JP]; 11-5, Ni-
ban-cho, Chiyoda-ku, Tokyo 102-0084 (JP).

(72) Inventor; and


(75) Inventor/Applicant (*for US only*): **OBARA, Sho** [JP/JP];

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



162162

(54) Title: PACKAGING BAG WITH TEAR-OFF OPENING

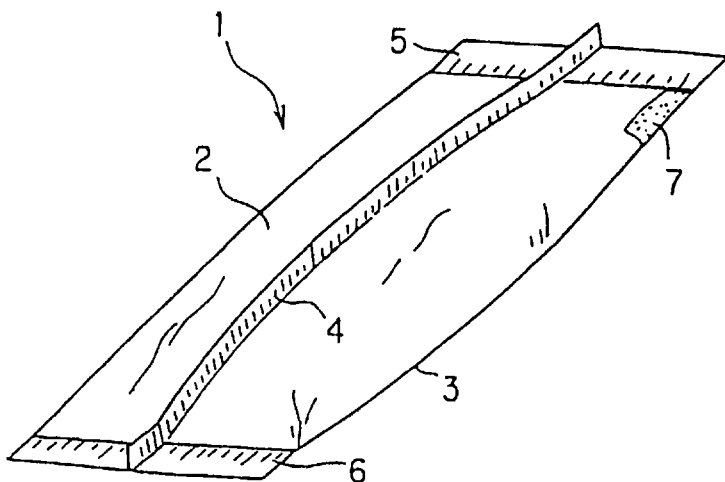

(57) Abstract: A packaging bag comprises a bag body (1), the first heat sealed portion (5), and the second heat sealed portion (6) and a tear-starting portion. The bag body is made of a plastic laminate film having a pair of opposite side edges (2, 3). The bag body is formed by bringing the pair of opposite side edges into contact with each other and heat-sealing them (4) over their entirety to form a tubular shaped body having a rear heat sealed (5) portion, and collapsing the tubular shaped body into a flatten shaped body having a front face, a rear face opposing the front face, a pair of opposite side edge (2, 3) portions connecting the front face and the rear face to each other, a first opened portion and a second opened portion opposing the first opened portion. The rear heat sealed portion is placed on the rear face. The first heat sealed

portion is formed by heat-sealing the first opened portion (5). The second heat sealed portion is formed by heat-sealing the second opened portion (6). The tear-starting portion is provided on at least one of the pair of opposite side edge portions and the rear heat sealed portion. The tear-starting portion (7) comprises fine concavities opening outwardly.

WO 02/092459 A2