




- (51) International Patent Classification:
F41A 5/18 (2006.01) *F41A 5/26* (2006.01)
- (21) International Application Number:
PCT/US2012/042711
- (22) International Filing Date:
15 June 2012 (15.06.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/498,226 17 June 2011 (17.06.2011) US
61/594,075 2 February 2012 (02.02.2012) US
- (71) Applicant (for all designated States except US): **COLT DEFENSE, LLC** [US/US]; 547 New Park Avenue, West Hartford, CT 06110-1336 (US).
- (72) Inventors; and
- (71) Applicants : **LANGEVIN, Kevin** [US/US]; 35 Harris Street, Berlin, CT 06037 (US). **JOSEY, Michael, A.** [US/US]; 7 Blueberry Lane, Farmington, CT 06032 (US).
- (74) Agent: **BOEHM, Christopher, C.**; Cantor Colburn LLP, 20 Church Street, 22 nd Floor, Hartford, CT 06103 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: GAS REGULATOR FOR A FIREARM AND FIREARM WITH GAS REGULATOR

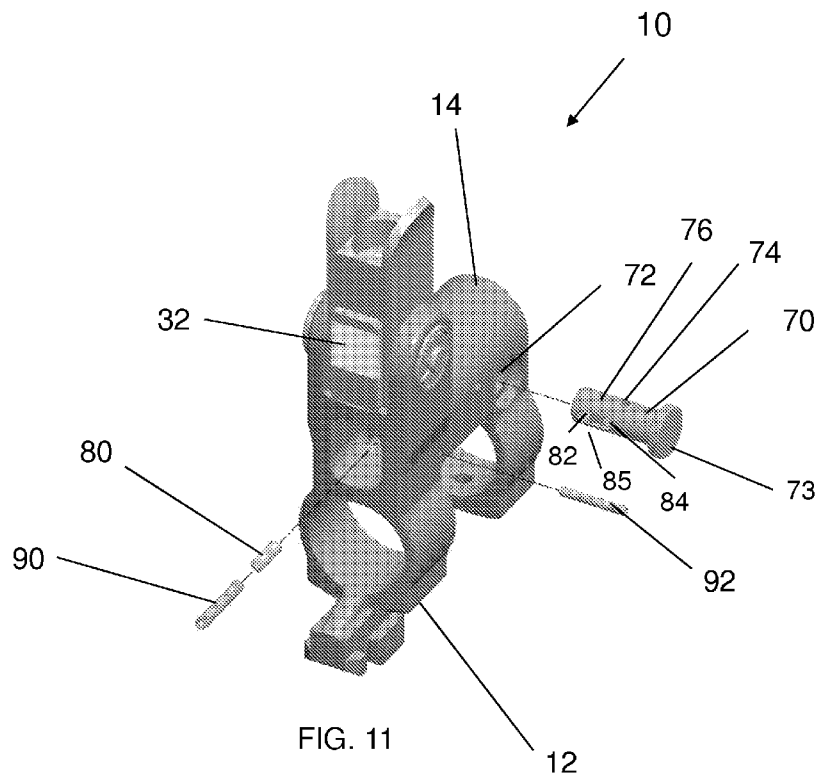

(57) Abstract: A gas regulator for a rifle is provided, the gas regulator having: an elongated member having a first end and a second end; a head portion located at the first end; a pair of openings passing through the elongated member, wherein one of the pair of openings is larger than the other one of the pair of openings; and a recessed area located at the second end.

**Published:****(88) Date of publication of the international search report:**

25 July 2013

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*