

1/15

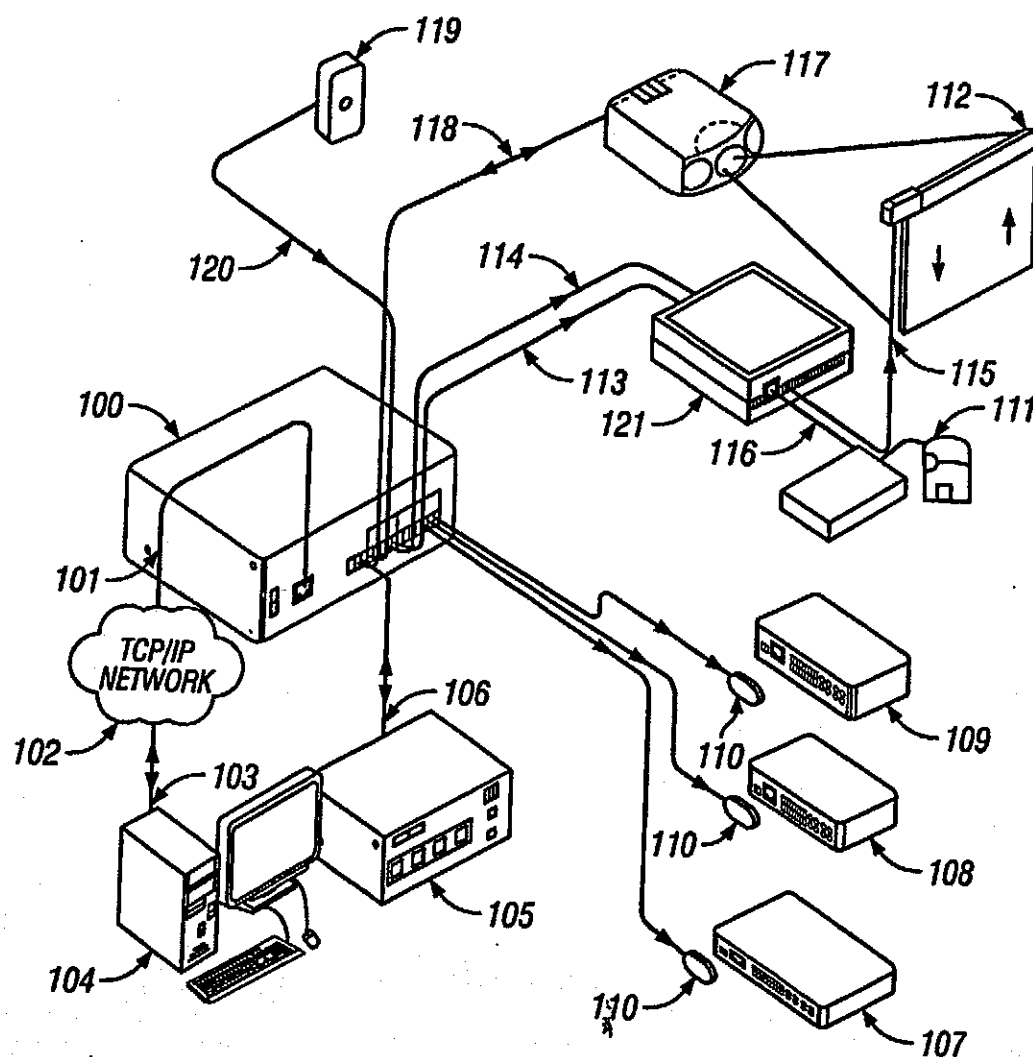


FIG. 1

2/15

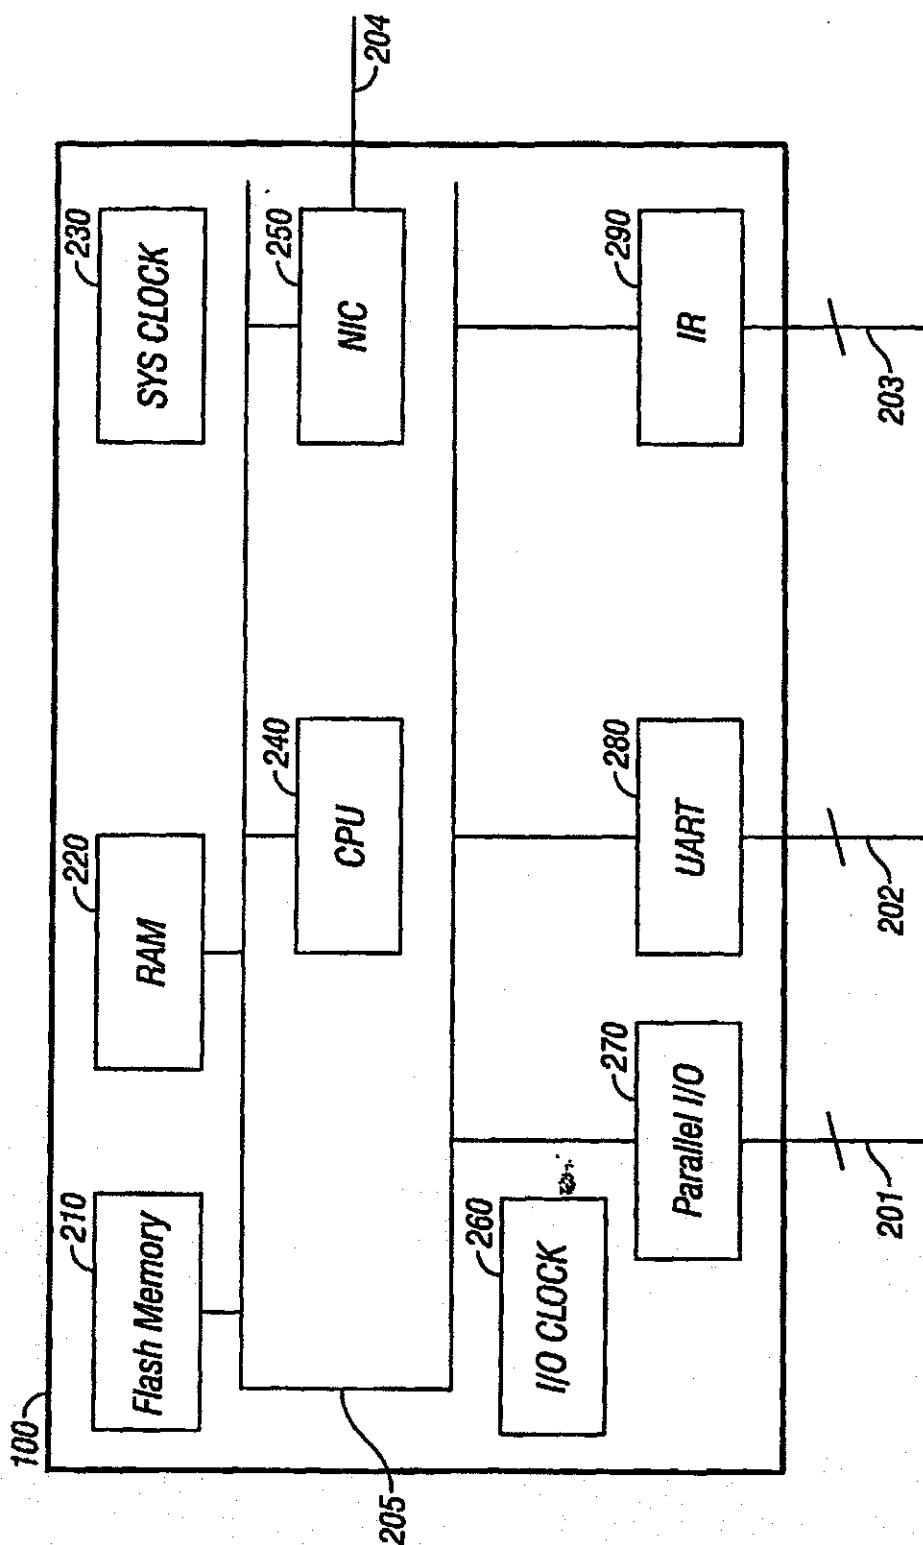


FIG. 2

3/15

Serial Port Settings

Serial Port:

☒ 1
 ☐ 2

Port type:

RS-232

Baud rate:

9600

Data bits:

8

Parity:

None

Stop bits:

1

Flow control:

None

Submit

Cancel

FIG. 3

4/15

Flex I/O Port Settings

Port	Mode	Pull-up	Threshold*	Lower* (0.25,3V)	Upper* (0.25,3V)	Status
1	Digital Input	☒	☒	0.9	1.0	Off
2	Digital Output	☒	☐			Off (5V)
3	Digital Output	☒	☐			Off (5V)
4	Digital Output	☒	☐			Off (5V)

* Lower and Upper Threshold settings are for Digital Input only.

FIG. 4

5/15

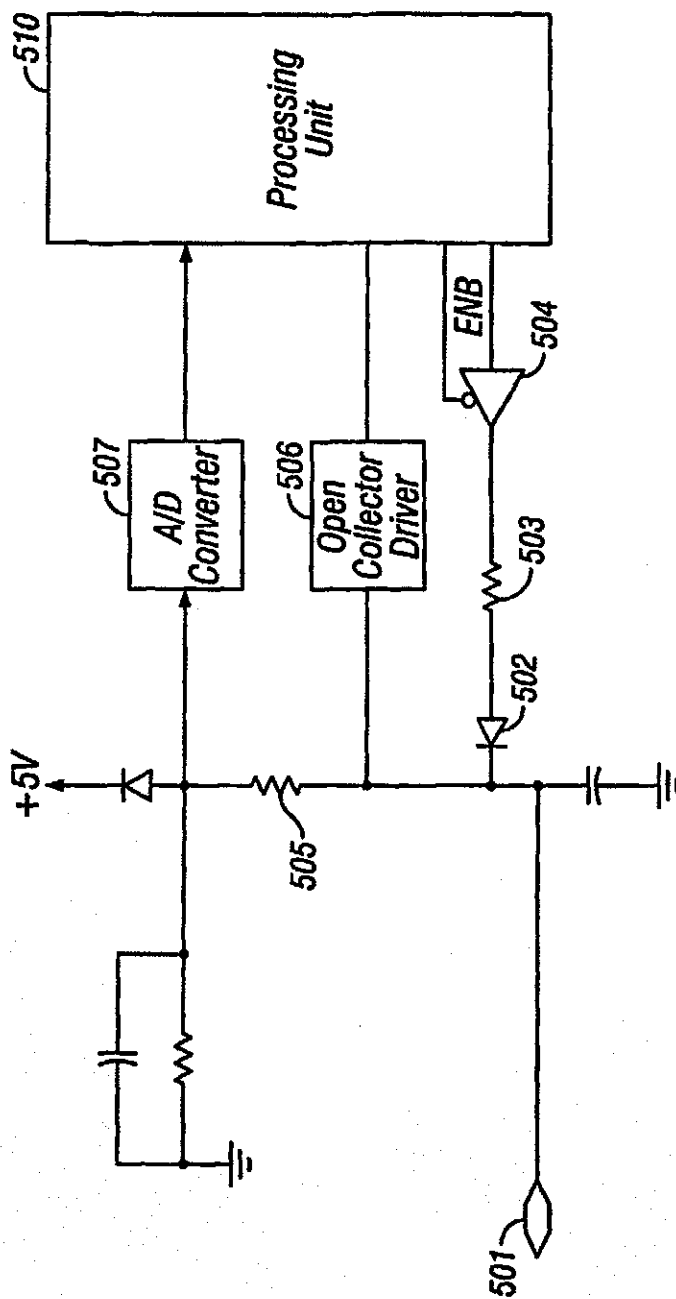


FIG. 5

6/15

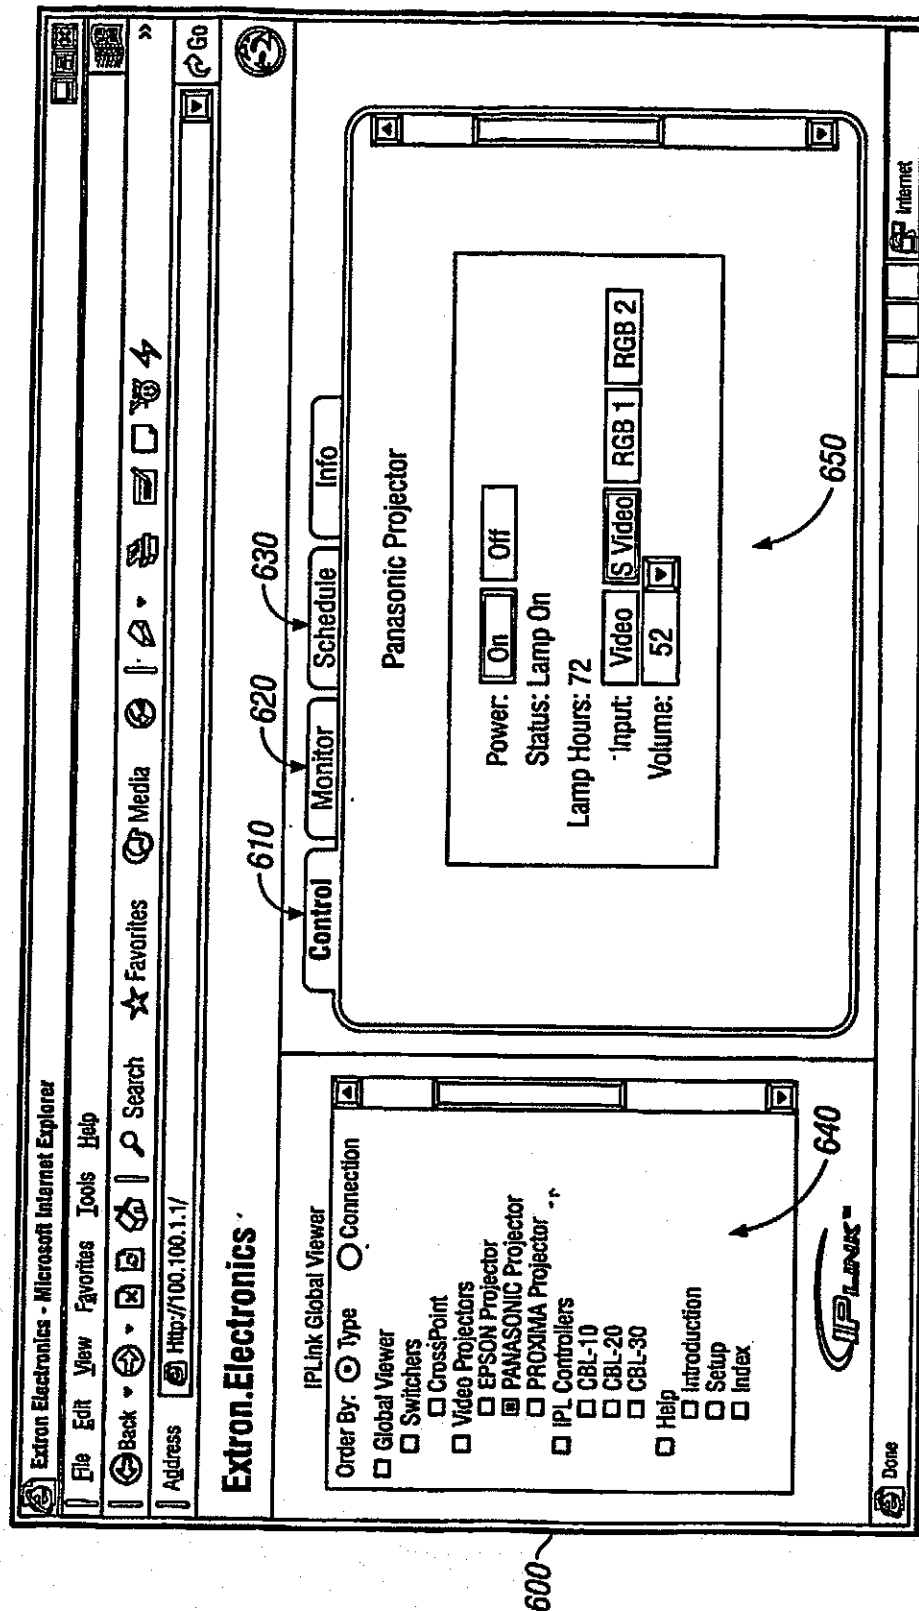


FIG. 6

7/15

Control

Monitor

Schedule

Info

Samsung SyncMaster 403T

Power:

On

Off

Input:

Video 1

Video 2

Component

RGB 1

RGB 2

RGB 3

Connection Status: Disconnected

Aspect Ratio (Video):

Expand 1

Expand 2

1:1

Panorama

Zoom 1

Zoom 2

Aspect Ratio (RGB):

Expand 1

Expand 2

1:1

Auto Image:

Auto Image

FIG. 7

8/15

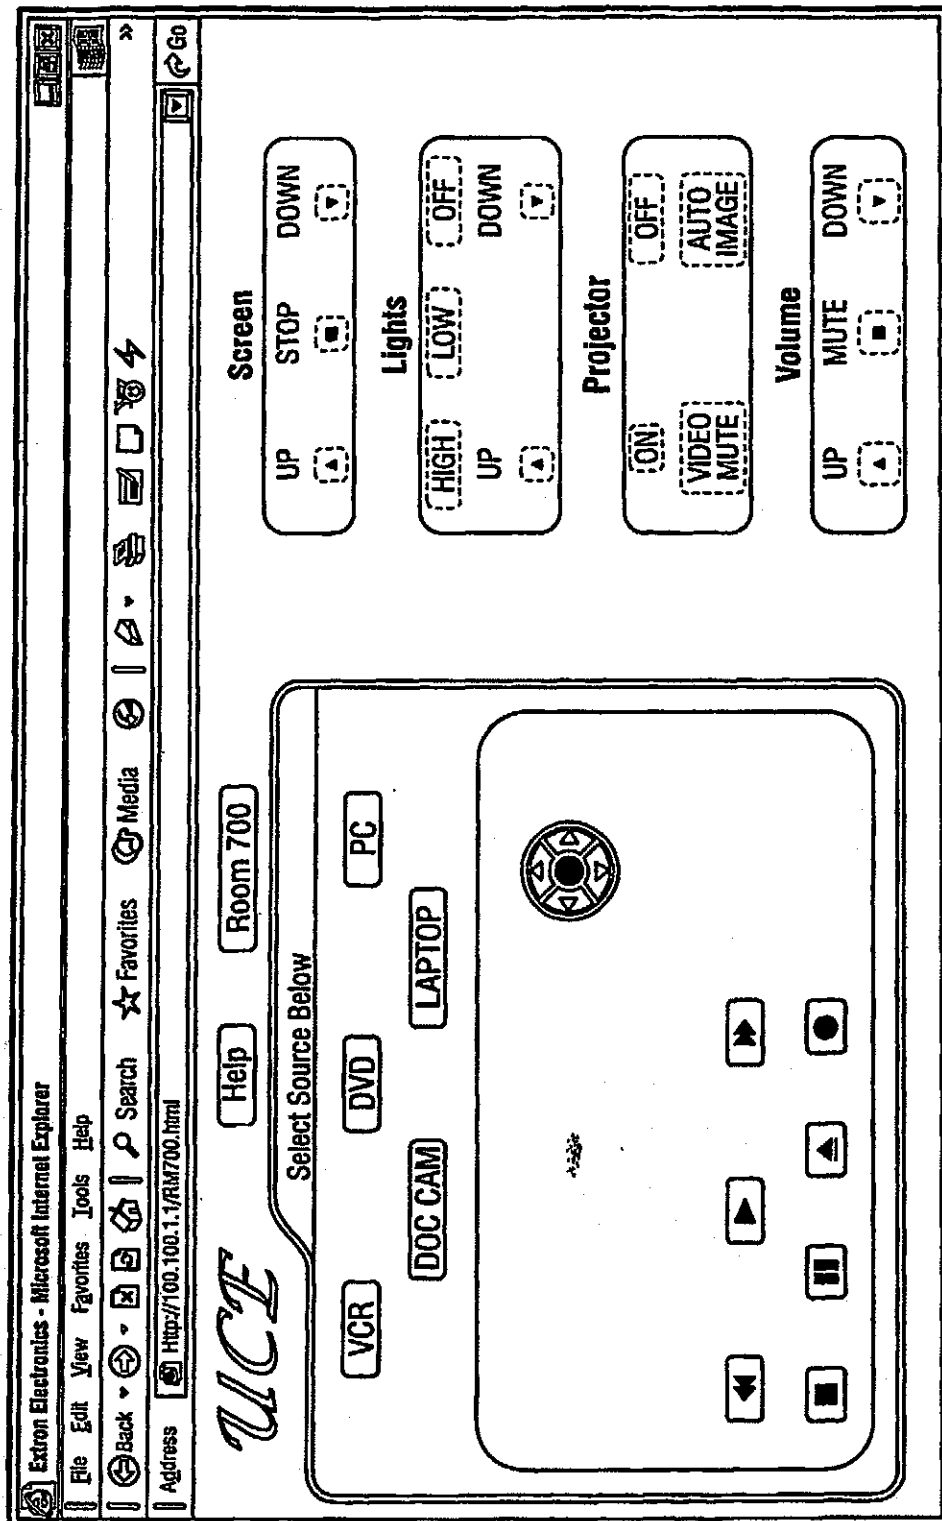


FIG. 8

9/15

Control **Monitor** **Schedule** **Info**

Samsung SyncMaster 403T

Monitor Connection Status: ☒ Enabled

Current: Disconnected

When: Disconnected

Notify Addresses: ☒ Enabled

OK

Wed, 13 Feb 2003 18:32

FIG. 9

10/15

Control

Monitor

Schedule

Info

Samsung SyncMaster 403T

Scheduled At:

12

:

00

▼

▼

Enabled

Mon	Tue	Wed	Thu	Fri	Sat	Sun
☒	☒	☒	☒	☒	☐	☐

Actions: Power Control : off

Wed, 13 Feb 2003 18:33

FIG. 10

11/15

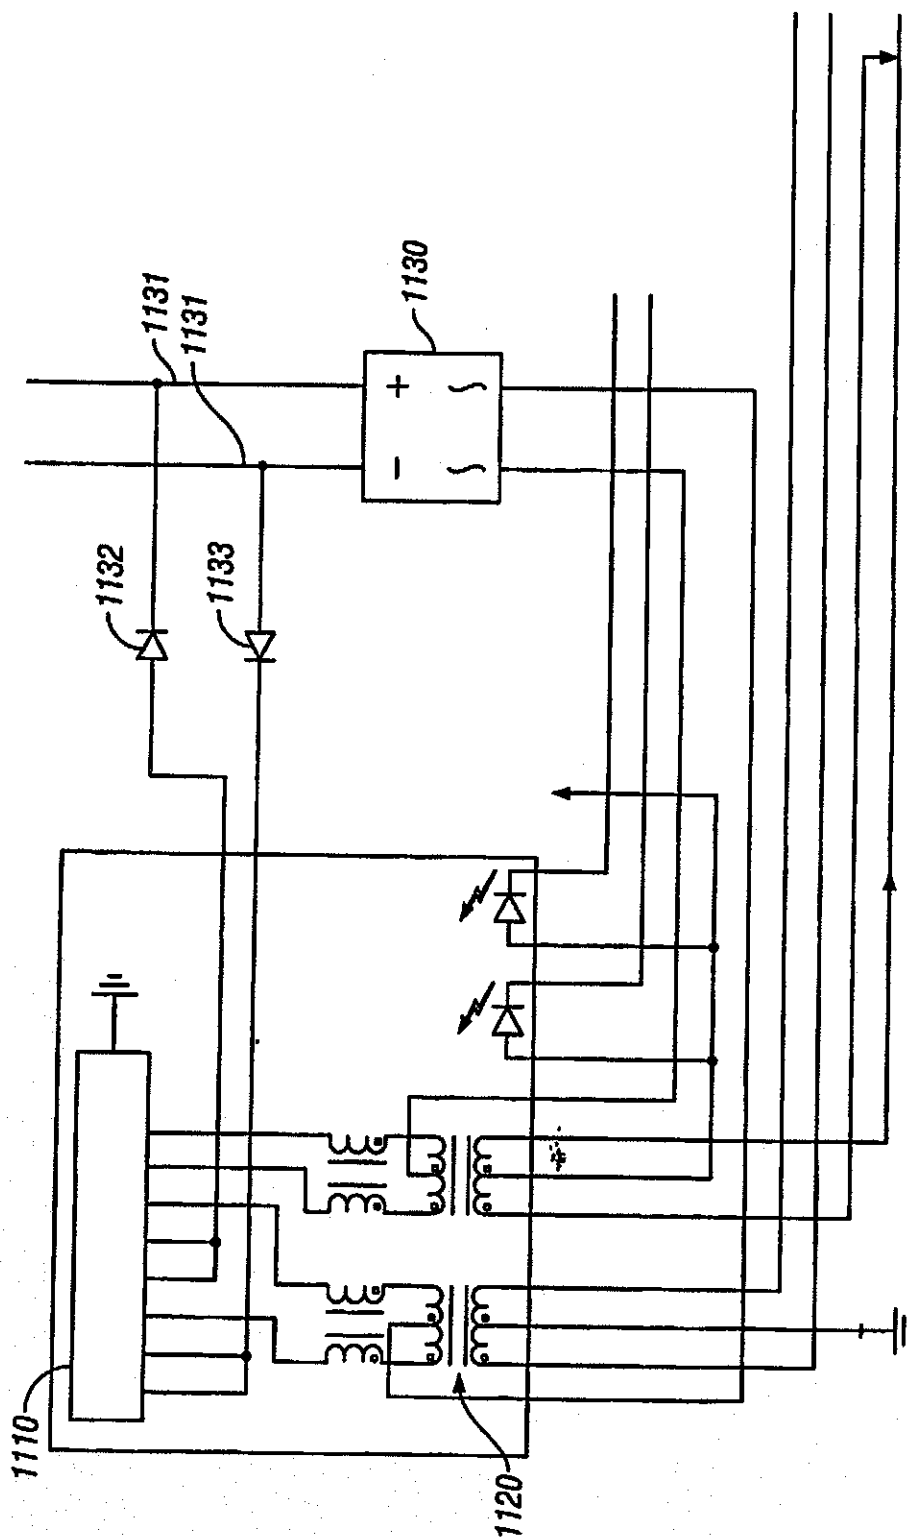


FIG. 11A

12/15

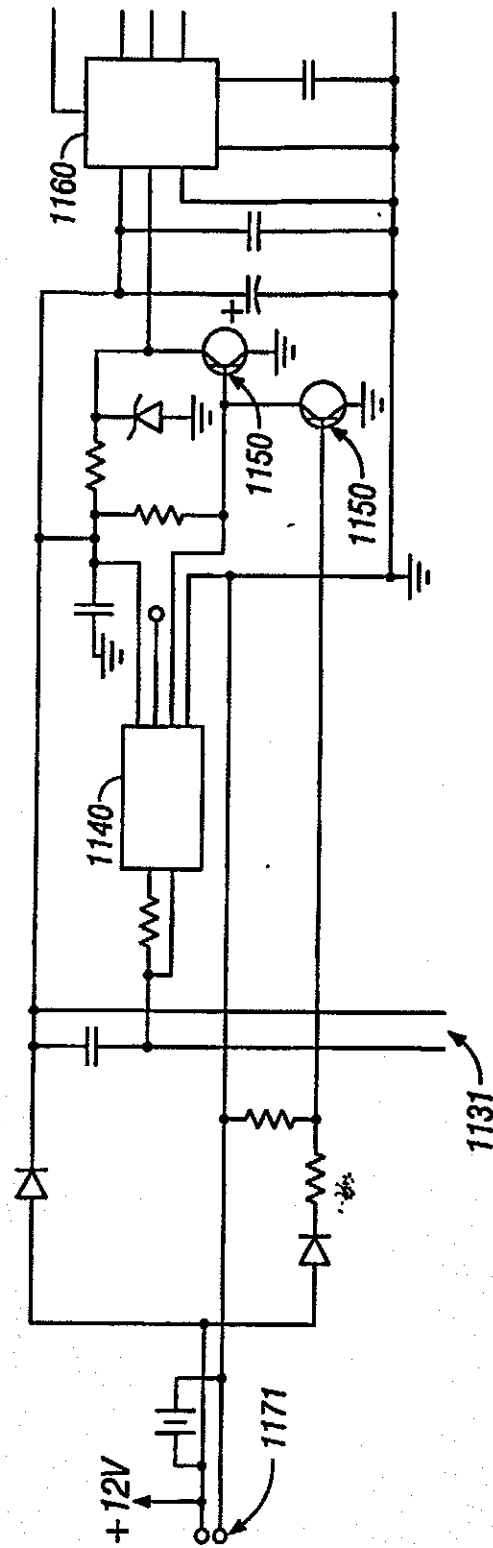


FIG. 11B

13/15

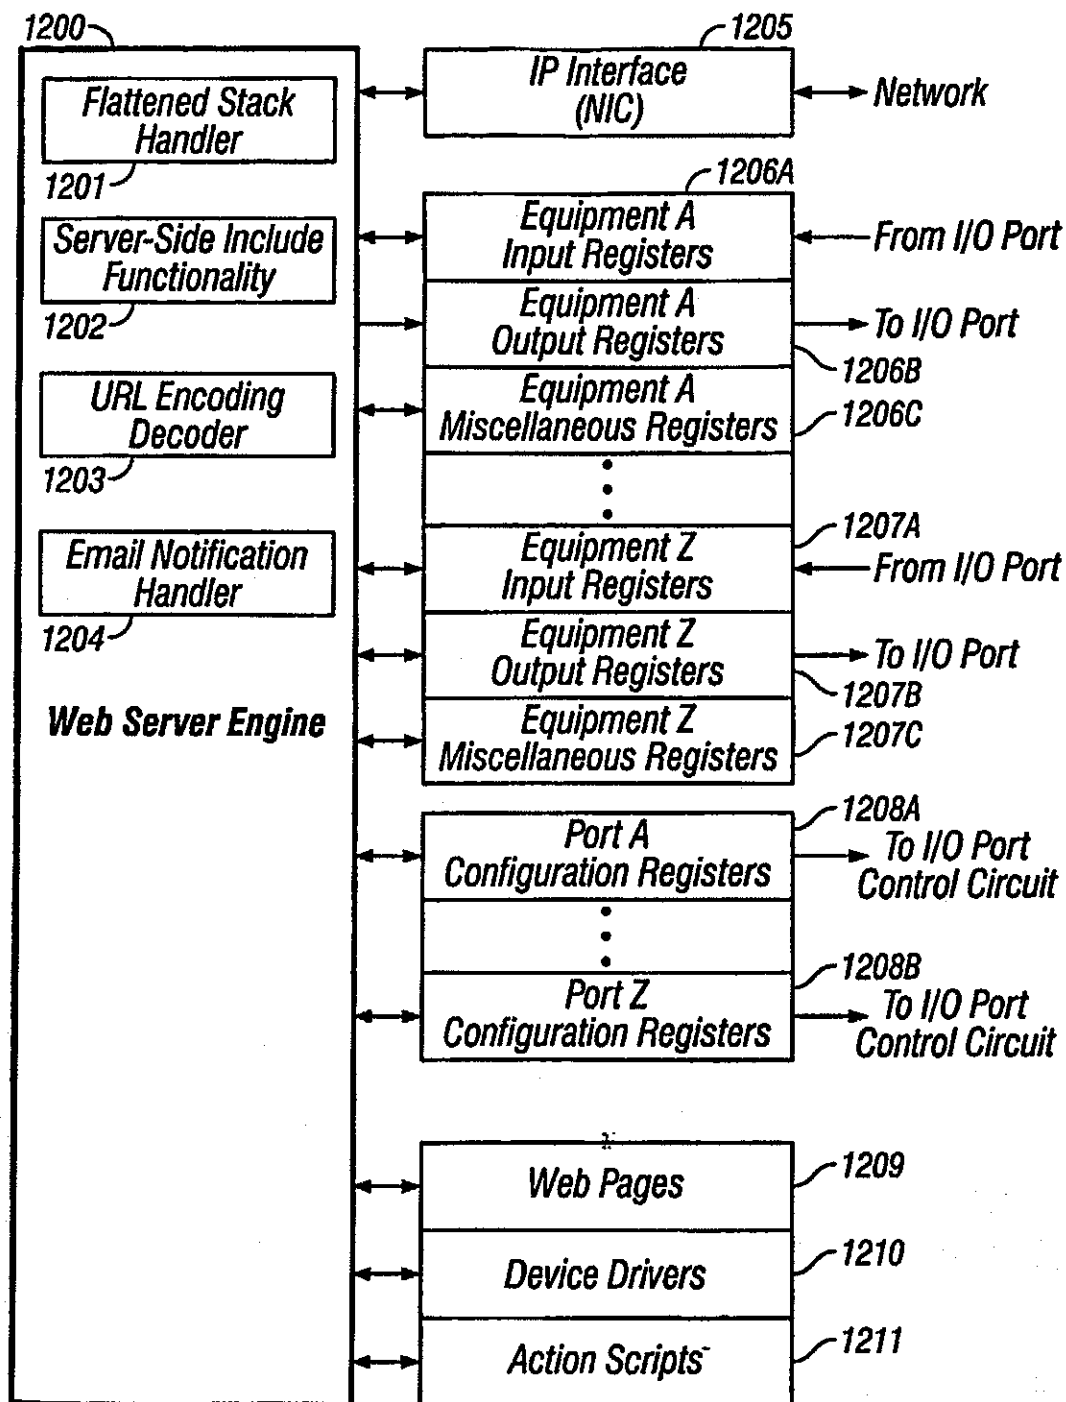


FIG. 12

14/15

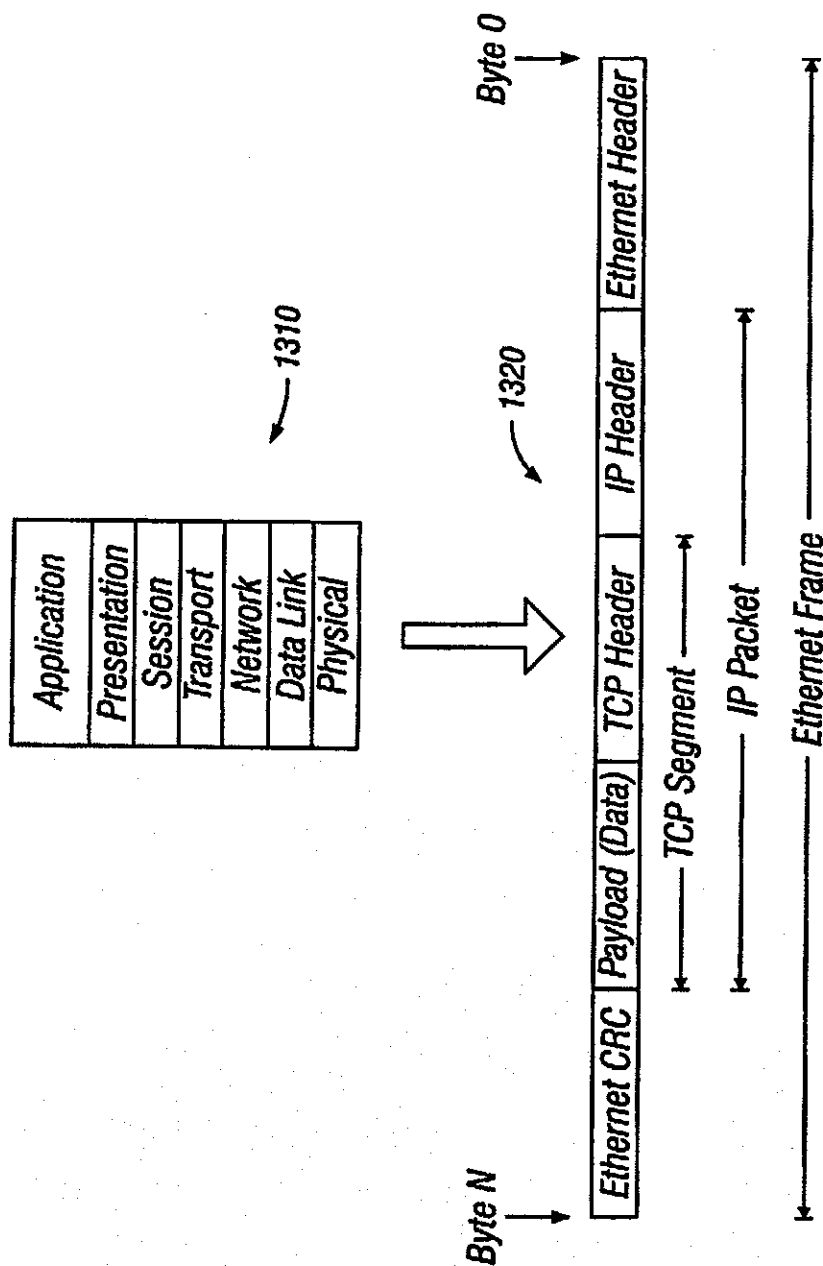


FIG. 13

15/15

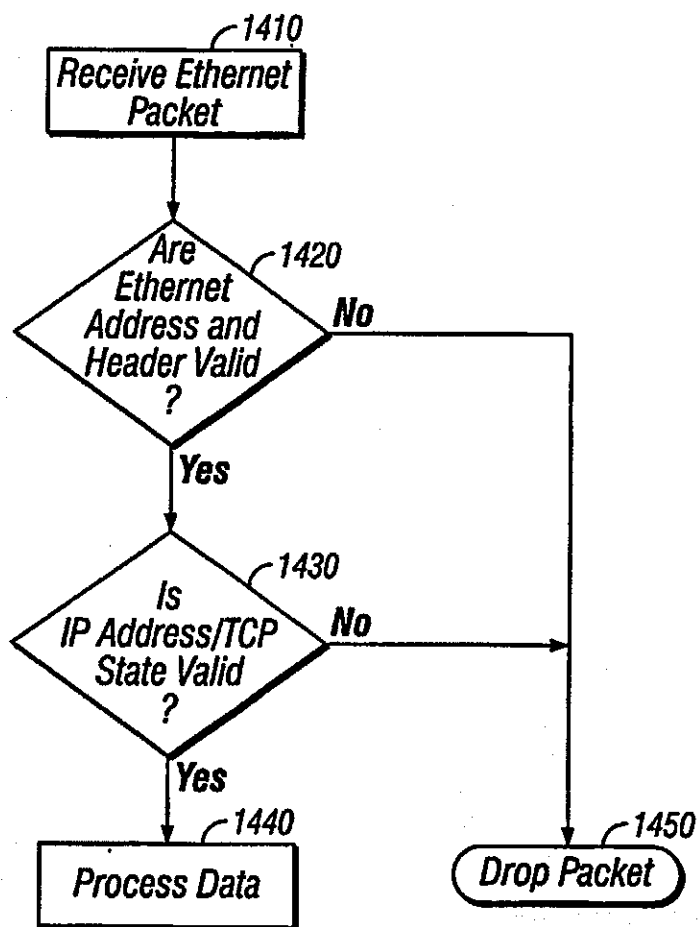


FIG. 14