

(51) International Patent Classification:
B63B 25/14 (2006.01) *F17C 13/00* (2006.01)(21) International Application Number:
PCT/NO2010/000166(22) International Filing Date:
3 May 2010 (03.05.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20092477 30 June 2009 (30.06.2009) NO(71) Applicant (for all designated States except US): **HAM-WORTHY GAS SYSTEMS AS** [NO/NO]; Solbråveien 10, N-1383 Asker (NO).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **RUMMELHOFF, Carl Jørgen** [NO/NO]; Veverbakken 157, N-1536 Moss (NO).(74) Agent: **ZACCO NORWAY AS**; P.O. Box 2003 Vika, N-0125 OSLO (NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

— with amended claims (Art. 19(1))

(54) Title: METHOD AND SYSTEM FOR STORAGE AND TRANSPORT OF LIQUEFIED PETROLEUM GASES

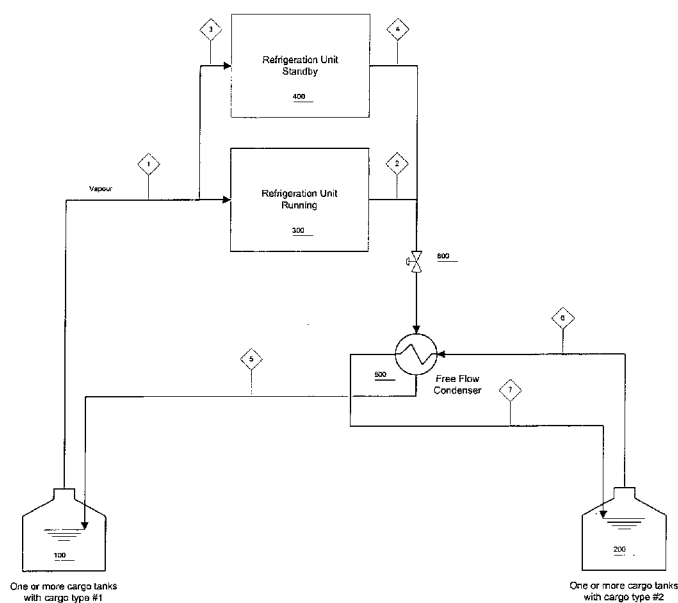

(57) Abstract: A method for storage and transport of LPG on LPG carriers, in particular two cargoes of different LPG types on same shipment, having reliquefaction units (300, 400) in which vaporized gases are condensed and then returned into at least one cargo tank (100) for the respective LPG cargo type. The method is further comprising: using the reliquefaction units (300, 400), at a minimum one running, as to condense vapour from the first cargo type; passing the condensed vapour through a heat exchanger (500); simultaneously flowing vapour from the second cargo type through the heat exchanger (500) as to condense vapour by means of heat exchanging with the condensed vapour; and returning the condensed vapours leaving the heat exchanger back into the respective cargo types. The present invention is also disclosing a system for storage and transport of LPG on LPG carriers.