

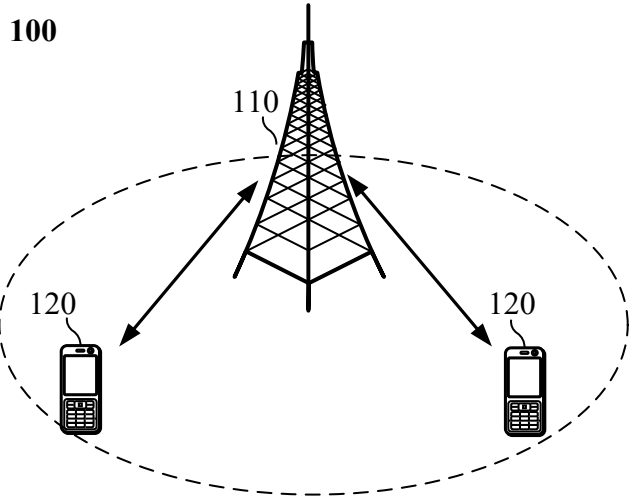


FIG. 1

A terminal device sends a first message to a network device, here, the first message includes a parameter for blind detection of a downlink control channel in a target resource region by the terminal device

201

FIG. 2

A network device receives a first message sent by a terminal device, here, the first message includes a parameter for blind detection of a downlink control channel in a target resource region by the terminal device

301

FIG. 3

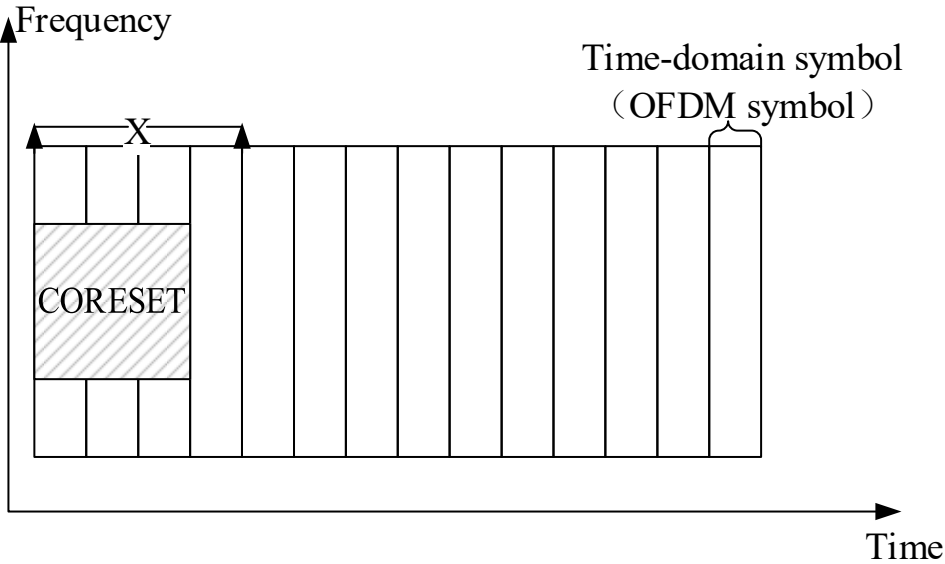


FIG. 4

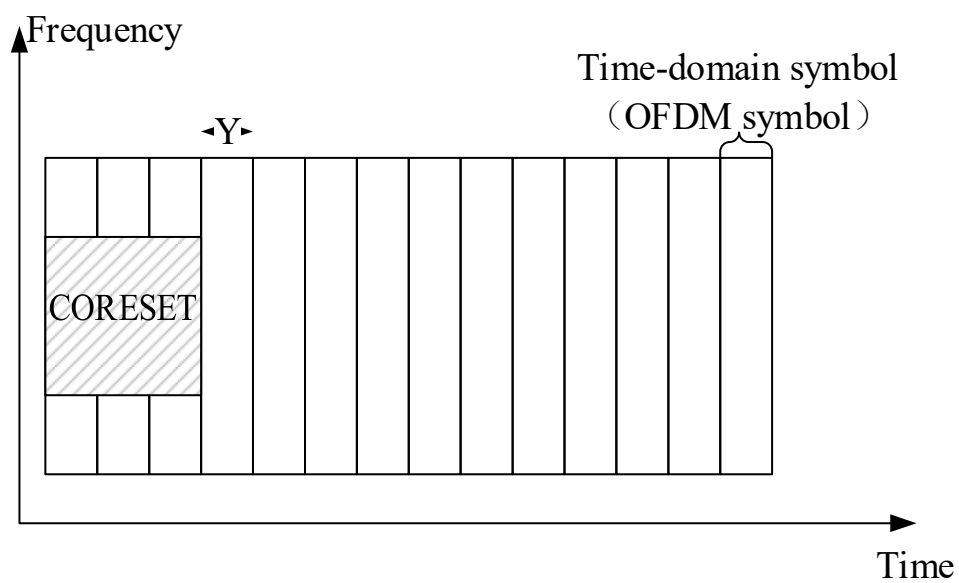


FIG. 5

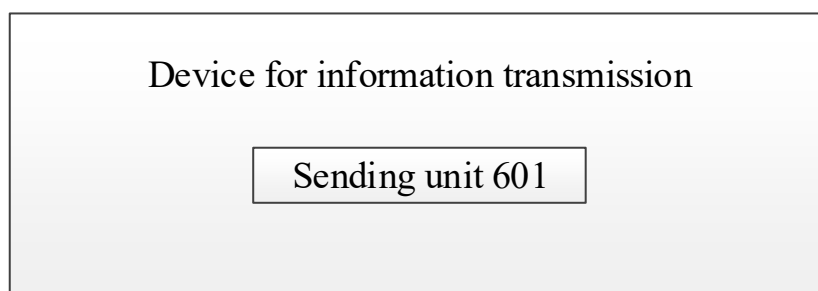


FIG. 6

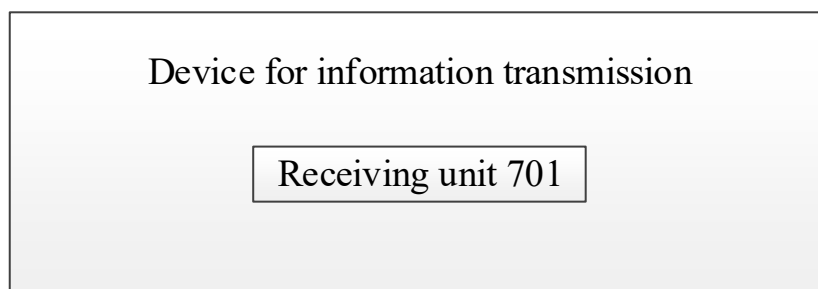


FIG. 7

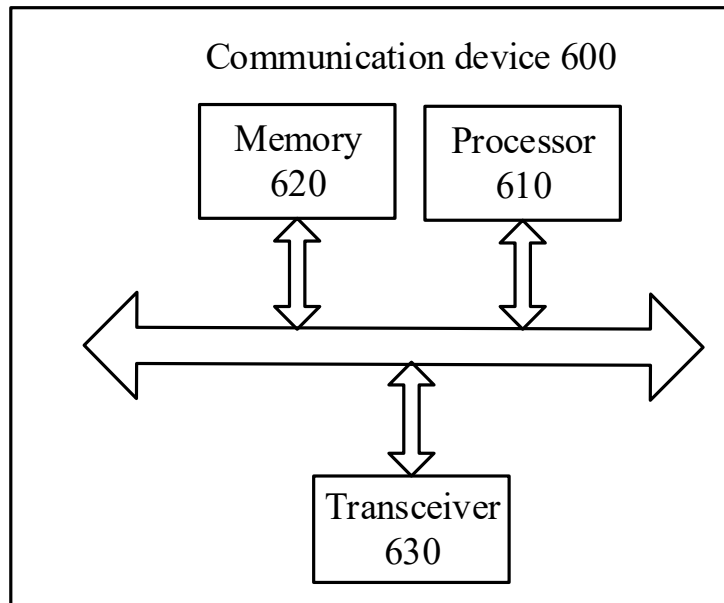


FIG. 8

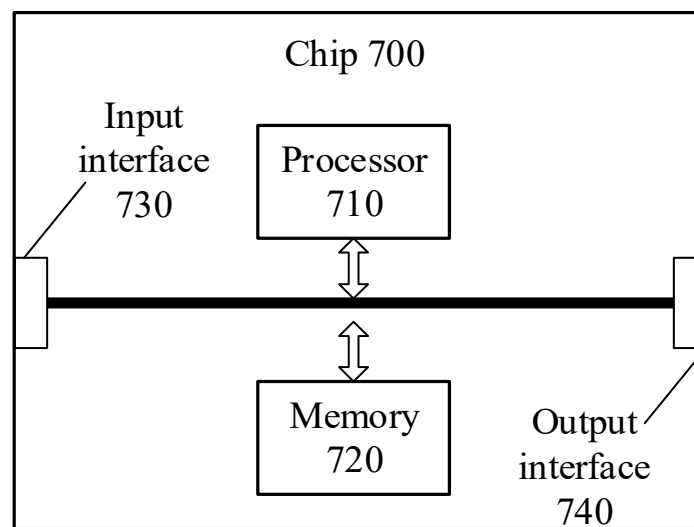


FIG. 9

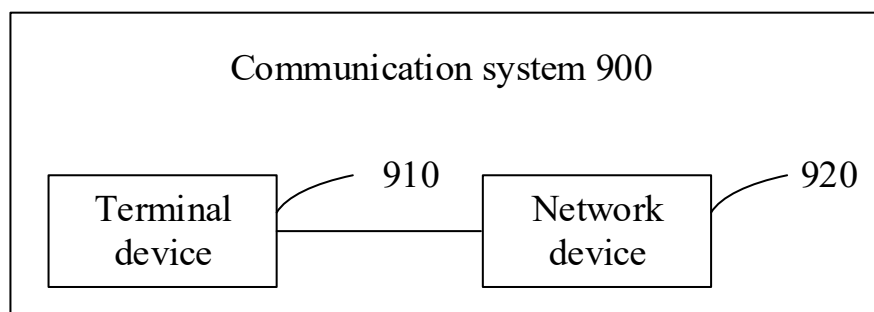


FIG. 10