


(a)

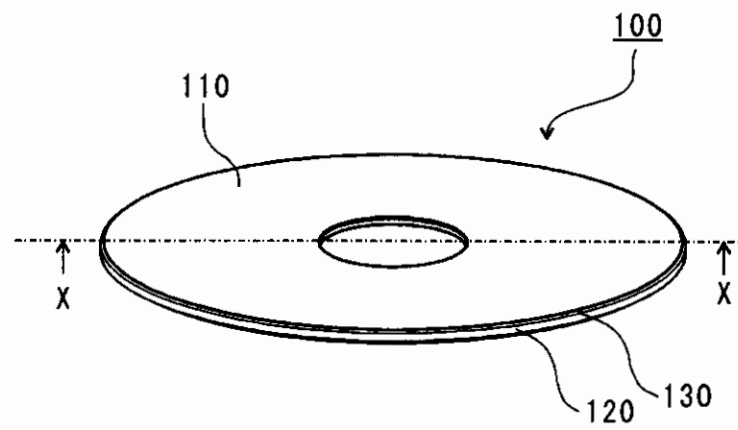

(b)

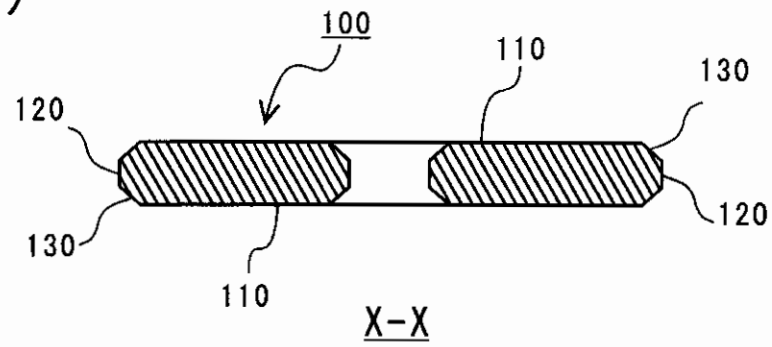


FIG. 1

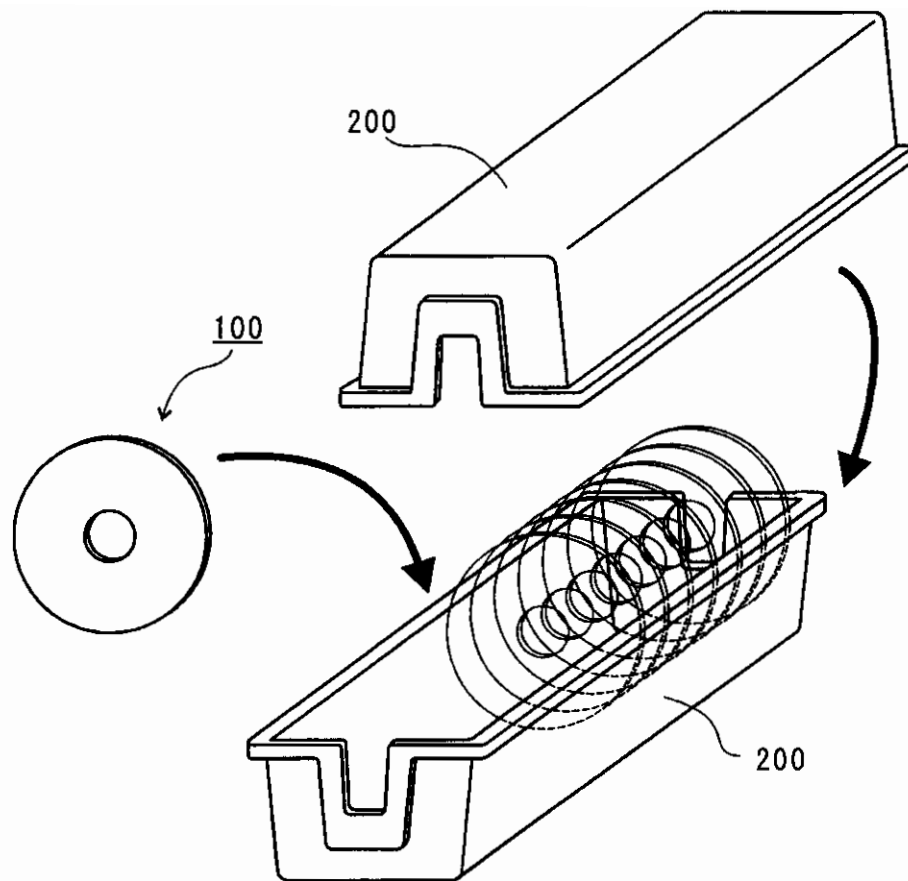


FIG. 2A

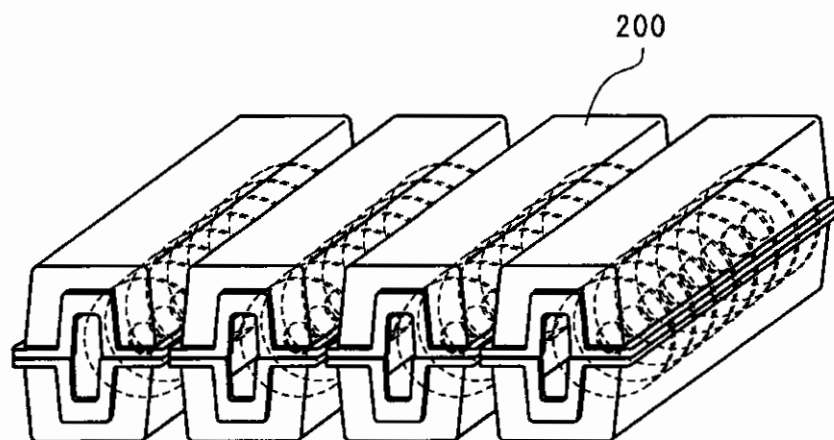


FIG. 2B

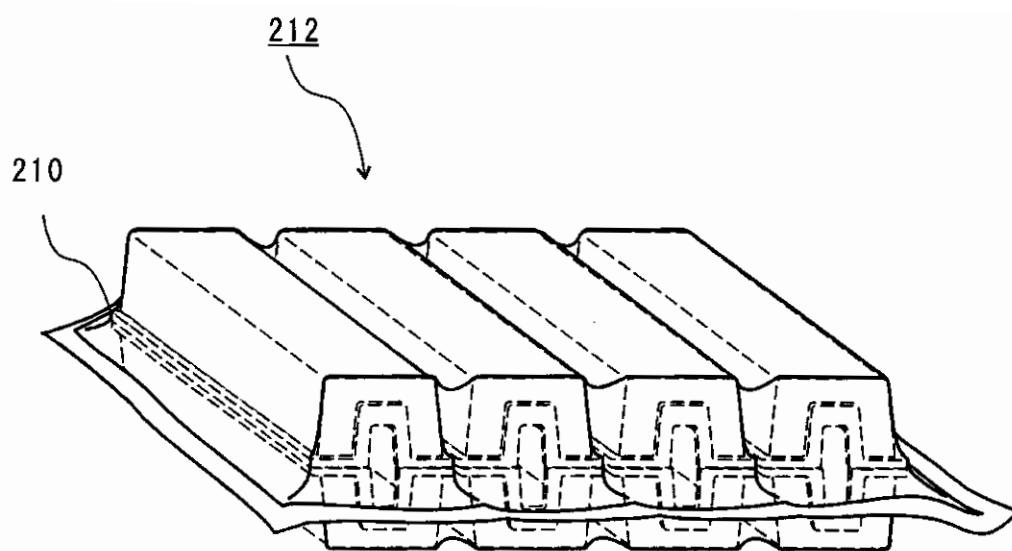


FIG. 3A

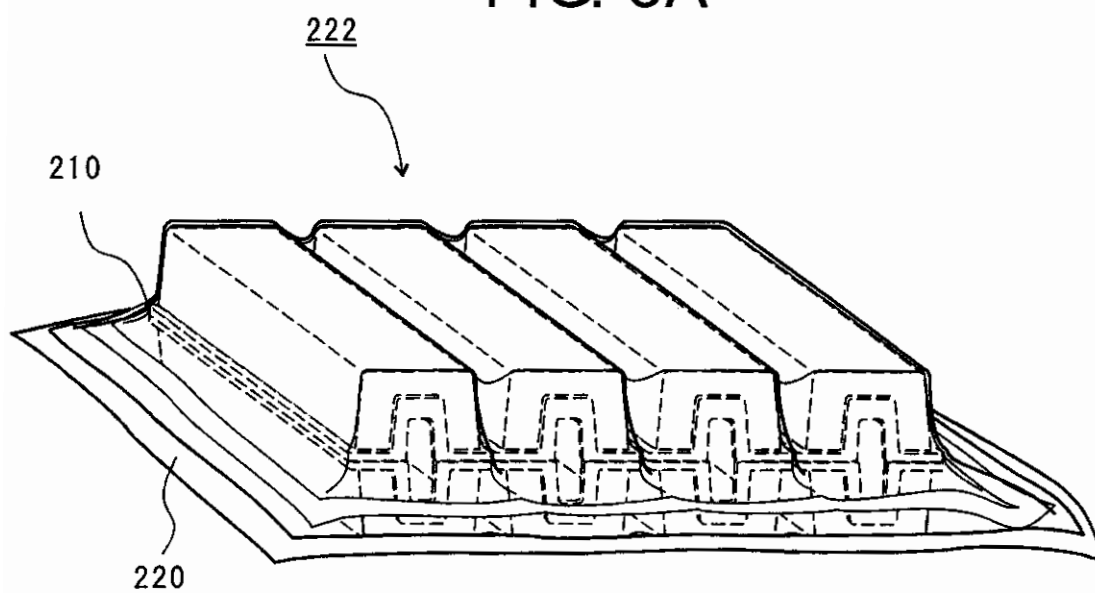


FIG. 3B






FIG. 4B

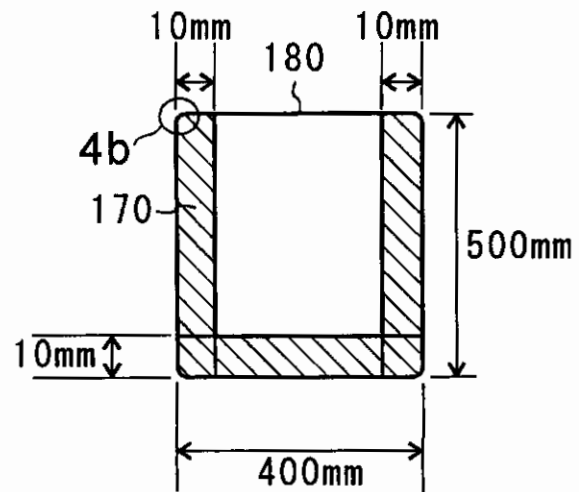

210

FIG. 4A

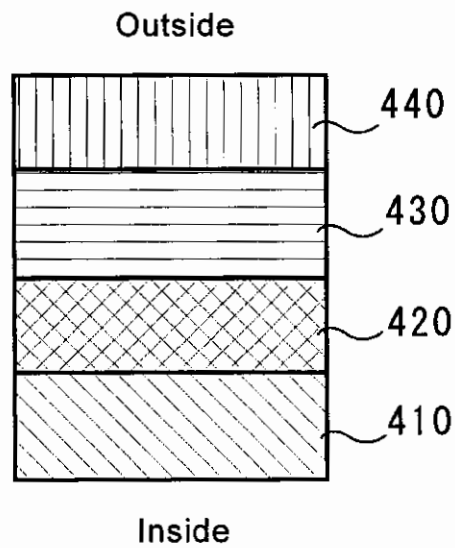

210

FIG. 5

Item	Unit	Reference Value
Heat Seal Strength	N/15mm	>24.5
Water Vapor Permeability	g/m ² ·day (40°C x 90%)	<0.1
Oxygen Permeability	cc/m ² ·day (30°C x 70%)	<0.1
Tear Strength	g	>50
Penetration Resistance Strength	kg	>12

FIG. 6

Hot and Humid/5 Days Test Results (Per 100 Glass Substrates)

Inspection Object	Sample No.	Average Number of Particles (Count/Surface)
This Embodiment (Double Packaging) Temperature 50°C, Humidity 60%RH	1	3
	2	5
	3	5
Comparative Example (Single Packaging) Temperature 50°C, Humidity 60%RH	4	26
	5	32
	6	28

FIG. 7