



(51) International Patent Classification:

G05D 7/06 (2006.01) *G01F 1/84* (2006.01)
B63B 27/34 (2006.01)

(21) International Application Number:

PCT/DK2015/050104

(22) International Filing Date:

24 April 2015 (24.04.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

PA 2014 00233 28 April 2014 (28.04.2014) DK

(71) Applicant: **A.P. MØLLER - MÆRSK A/S** [DK/DK];
Esplanaden 50, DK-1263 Copenhagen K (DK).

(72) Inventor: **JEPPESEN, Finn**; Hædersdalvej 44, DK-2650
Hvidovre (DK).

(74) Agent: **NORDIC PATENT SERVICE**; Bredgade 30,
1260 Copenhagen K (DK).

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

(54) Title: A SYSTEM AND METHOD FOR MEASURING THE AMOUNT OF FUEL DELIVERED IN A BUNKERING OPERATION

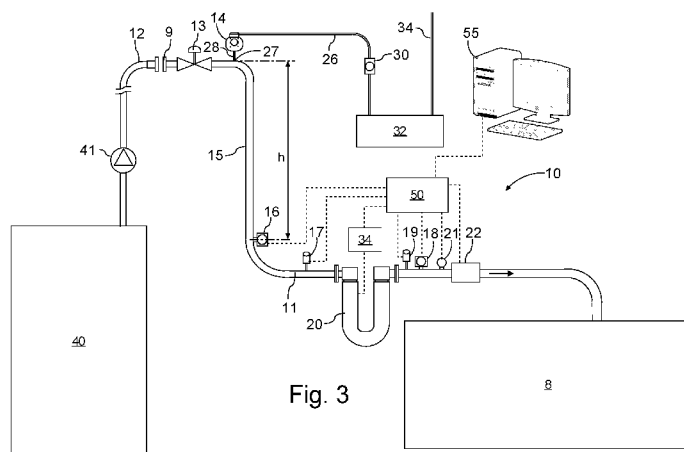


Fig. 3

(57) Abstract: A system (10) for measuring the amount of bunker fuel, such as for example heavy fuel oil, transferred during a bunkering activity. The system (10) comprises a pipe (11) configured to transport bunker fuel, an air/gas separator (14) connected to the pipe (11) at a first position, a Coriolis flow meter (20) configured to measure a flowrate of the bunker fuel, the pipe (11) comprising a downwardly extending portion (15) arranged downstream of the first position and upstream of the Coriolis flow meter (20), an electronically controlled backpressure valve (22) in the pipe (11) at a position downstream of the Coriolis flow meter (20), the backpressure valve (22) with an adjustable restriction effect (22) on any fluid flowing through the backpressure valve (22), a pressure sensor (16) at a second position downstream of the first position and of upstream of the backpressure valve (22), and an electronic control unit (50) in electrical communication with the Coriolis flow meter (20), with the pressure sensor (16) and with the electronically controlled backpressure valve (22). The electronic control unit (50) is configured to control the backpressure valve (22) using the signal from the pressure sensor (16) in order to maintain the pressure sensed by the pressure sensor (16) close to a predetermined pressure value.