

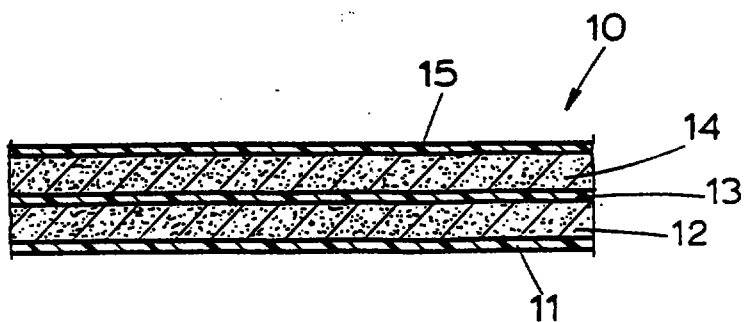


FIG. 1


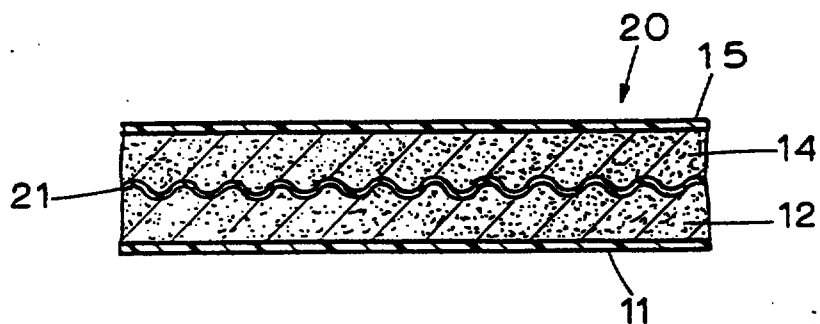


FIG. 2

This Sheet Has Been Replaced



FIG. 3

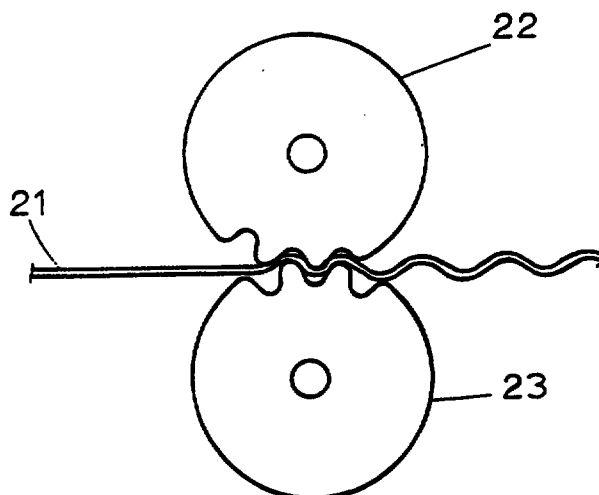

This Sheet Has Been Replaced



FIG. 4

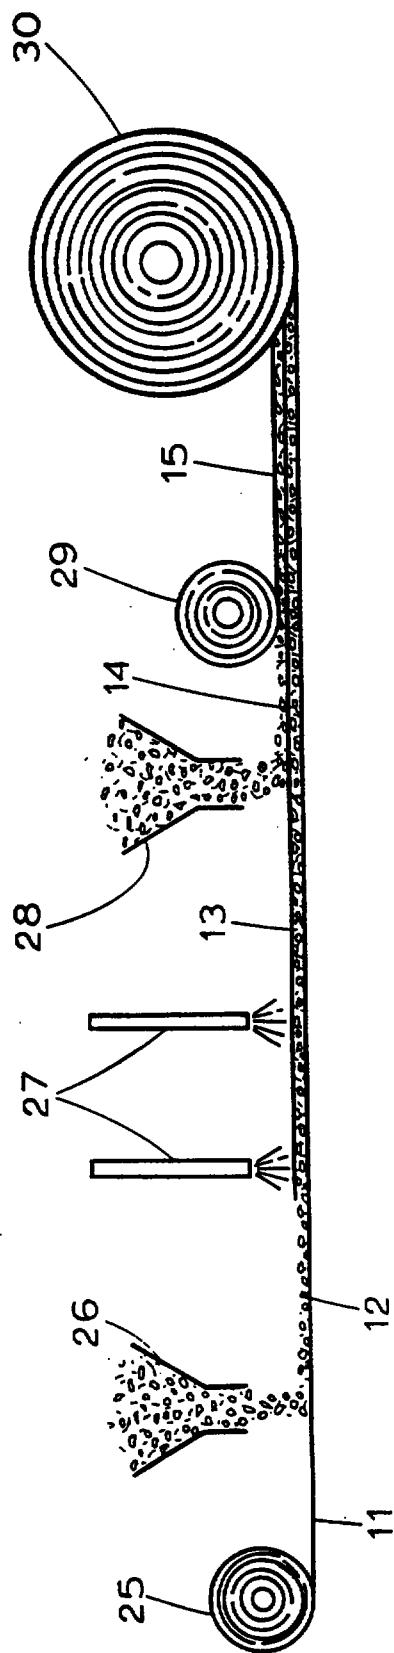
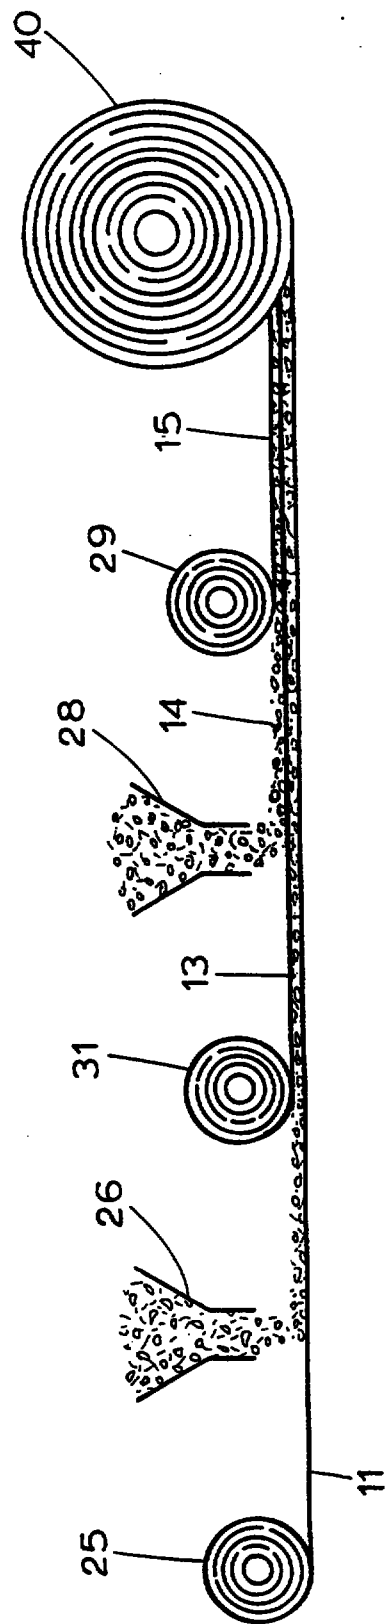


FIG. 5



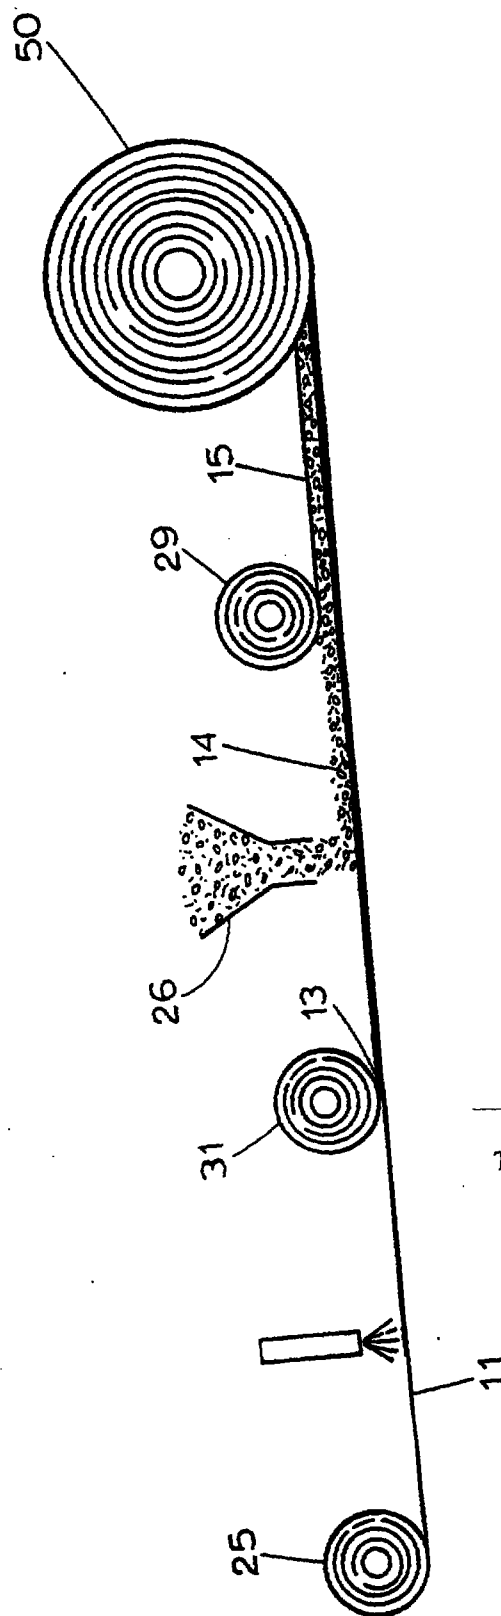


FIG. 6

This Sheet Has Been Replaced



**ABSTRACT**

**LOW PERMEABILITY GEOSYNTHETIC CLAY LINER  
AND METHOD OF MANUFACTURE THEREOF**

A flexible geosynthetic clay liner with a low permeability or controlled permeability intermediate sheet is provided. The liner includes two outer sheets with two layers of bentonite and an intermediate sheet disposed therebetween. The intermediate sheet may be rippled or deformed to enhance the structural stability of the liner. The intermediate sheet may be chosen from a material with low or ultra-low permeability characteristics or may be chosen from a material with controlled or directional permeability characteristics.

---

This Sheet Has Been Replaced



A cross-sectional view of a multi-layered structure 10. The structure consists of several layers. The outermost layer is labeled 11 and has a diagonal hatching pattern. Inside this is a layer labeled 12, which is a thin solid line. The next layer is labeled 13 and contains a stippled pattern. This is followed by a layer labeled 14, which is a thin solid line. The innermost layer is labeled 15 and contains a diagonal hatching pattern, similar to layer 11. An arrow points from the label 10 to the entire assembly.

REPLACEMENT SHEET

21 DEC 1996

FIG. 4


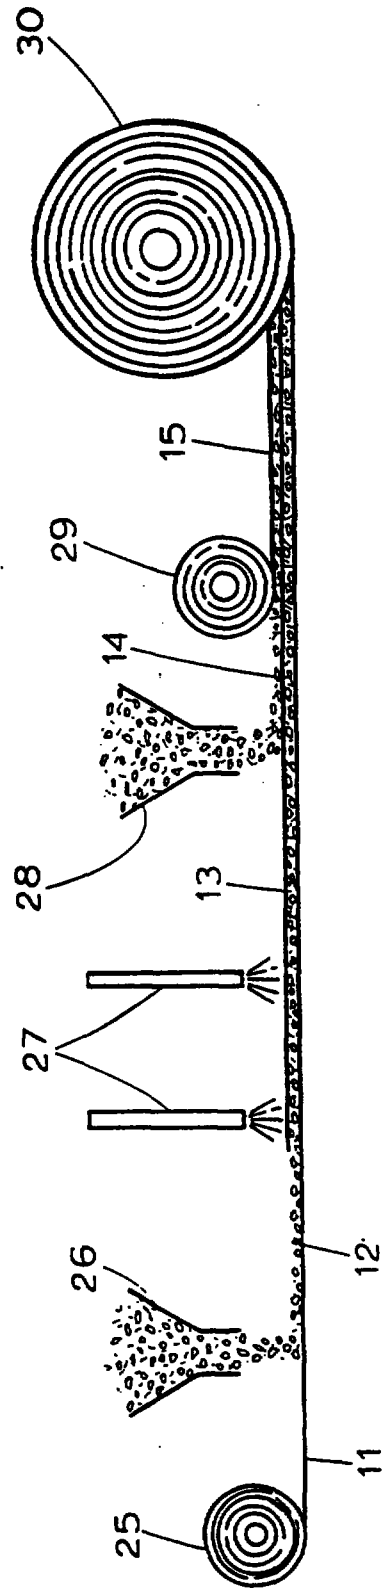


FIG. 5

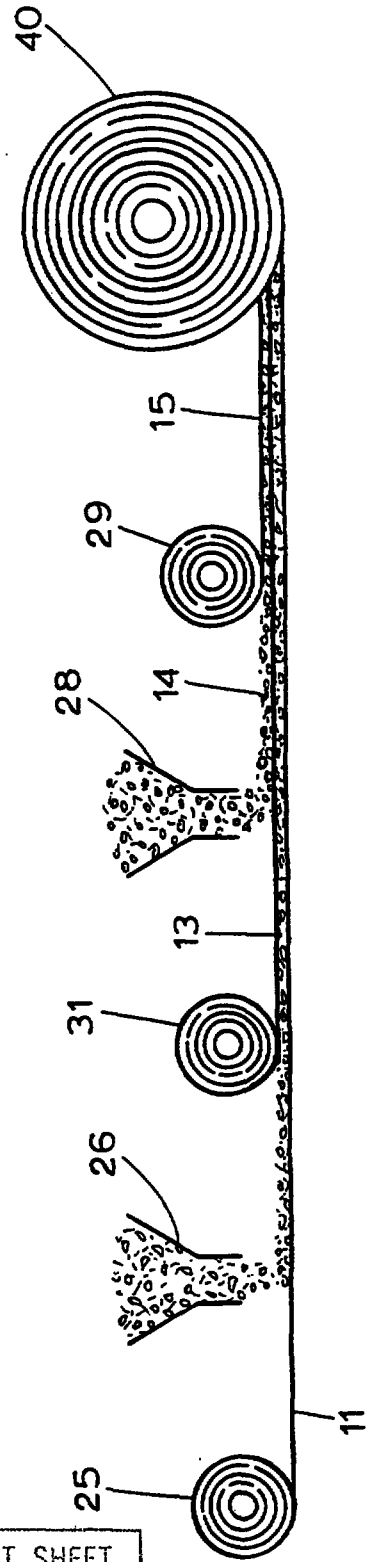

REPLACEMENT SHEET

21 DEC 1996

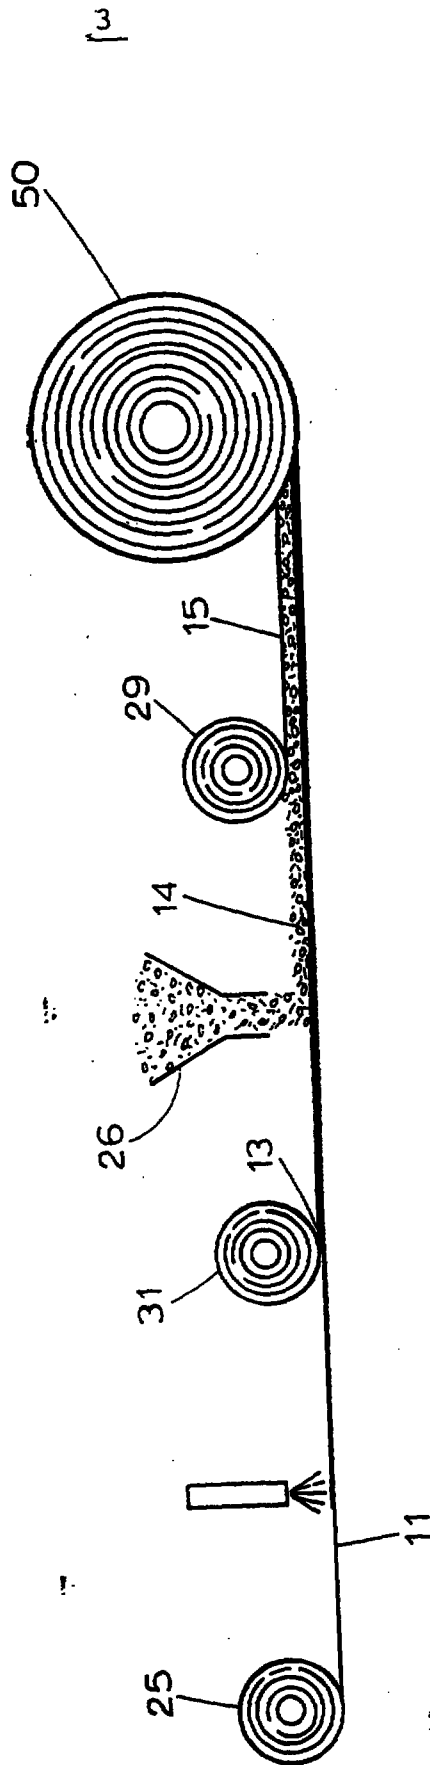


FIG. 6

REPLACEMENT SHEET

21 DEC 1996


21 DEC 1996

## TEXT OF THE ABSTRACT

LOW PERMEABILITY GEOSYNTHETIC CLAY LINER AND METHOD OF  
MANUFACTURE THEREOF


A flexible geosynthetic clay liner (10) with a low permeability or controlled permeability intermediate sheet (13) is provided. The liner (10) includes two outer sheets with two layers (12,14) of bentonite and an intermediate sheet (13) disposed therebetween. The intermediate sheet (13) may be rippled or deformed to enhance the structural stability of the liner (10). The intermediate sheet (13) may be chosen from a material with low or ultra-low permeability characteristics or may be chosen from a material with controlled or directional permeability characteristics.

Fig. 4.

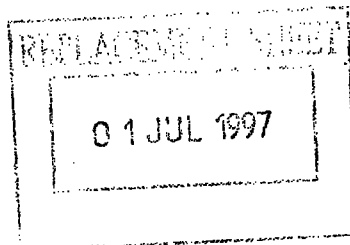



- 13 -

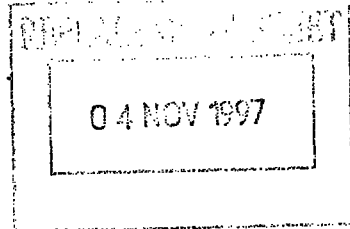CLAIMS

1. An improved flexible geosynthetic clay liner having a water-permeability less than  $5 \times 10^{-10}$  cm/sec comprising:

a flexible primary carrier sheet;

a first layer of bentonite clay disposed on top of the primary carrier sheet;

a flexible intermediate polymeric sheet material layer disposed on top of the first layer of bentonite clay;

a second layer of bentonite clay disposed on top of the intermediate polymeric sheet material layer; and

a flexible cover sheet disposed on top of the second layer of bentonite clay.

2. The geosynthetic clay liner of claim 1, wherein the intermediate layer is fabricated from a sheet of low permeability plastic.

3. The geosynthetic clay liner of claim 1, wherein the intermediate layer is fabricated from a liquid polymer spray.

4. The geosynthetic clay liner of claim 1, wherein the intermediate layer is further characterized as being a controlled permeability sheet.

5. The geosynthetic clay liner of claim 1, wherein adhesive is applied to an upper surface of the primary carrier sheet to assist in adhering the first layer of bentonite clay against the upper surface of the primary carrier sheet and adhesive is applied to a lower surface of the cover sheet to assist in adhering the flexible intermediate layer to the cover sheet.

- 1 -

# **LOW PERMEABILITY GEOSYNTHETIC CLAY LINER AND METHOD OF MANUFACTURE THEREOF**

## **FIELD OF THE INVENTION**

This invention relates generally to  
 5 flexible geosynthetic clay liners for use in  
 creating low permeability bottom layers or barriers  
 in waste containment sites, man-made bodies of water  
 and other applications where a low permeability,  
 flexible barrier is required. More specifically,  
 10 this invention relates to a geosynthetic clay liner  
 with a low or controlled permeability sheet or layer  
 included within the body of the geosynthetic clay  
 liner. Still more specifically, the present  
 invention relates to a geosynthetic clay liner  
 15 consisting of two flexible textile sheets with at  
 least one flexible layer of bentonite and a low or  
 controlled permeability flexible sheet or layer  
 disposed therebetween.

## **BACKGROUND OF THE INVENTION**

20 The concept of using flexible geosynthetic  
 clay liners (GCLs) for creating a low permeability  
 layer or barrier for use in landfills and man-made  
 bodies of water is well known. While flexible GCLs  
 made with bentonite provide an effective barrier,  
 25 users of such GCLs often complain that the GCLs are  
 not effective enough, i.e. the GCLs do not provide  
 sufficiently low permeabilities under certain  
 circumstances, such as landfill caps and deep ponds,

| REPLACED SHEETS                                                                                     | SG |
|-----------------------------------------------------------------------------------------------------|----|
| <input type="checkbox"/> Description : paged ..... to paged .....                                   |    |
| <input checked="" type="checkbox"/> Claim(s) : paged ... <u>3</u> ... to paged ... <u>7</u> .....   |    |
| <input checked="" type="checkbox"/> Drawing(s) : paged ... <u>4</u> ... to paged ... <u>7</u> ..... |    |
| <input checked="" type="checkbox"/> Abstract : paged ... <u>4</u> ... to paged ... <u>7</u> .....   |    |
| DATE OF RECEIPT .....                                                                               |    |

because of low confining stresses that can practically be applied to the GCL as a result of soil cover thickness limitations.

For example, many state regulations and project specifications require that the drainage out of a man-made pond be less than 500 gallons per day per acre of pond. This requirement is problematic for deep ponds where the height of the water level is greater than 3 feet. In practice, the drainage out of deep ponds lined with conventional GCLs generally exceeds several thousand gallons per day per acre of pond because current GCLs have permeabilities ranging from  $5 \times 10^{-9}$  cm/sec to  $1 \times 10^{-7}$  cm/sec. Further, typical GCLs are relatively thin having a typical thickness of 0.7".

Therefore, it would be desirable to provide a bentonite GCL with an improved or controlled permeability. The resulting GCL would be an ultra low permeability GCL used to provide an effective barrier against the transmission of liquids (i.e. with permeabilities less than about  $5 \times 10^{-10}$  cm/sec, preferably less than about  $1 \times 10^{-10}$  cm/sec).

#### **BRIEF DESCRIPTION OF THE INVENTION**

The present invention makes a significant contribution to the flexible geosynthetic clay liner art by providing a liner with improved low permeability characteristics and/or controlled permeability characteristics. Specifically, reviewing the construction of the GCL of the present invention from bottom to top, the GCL includes a flexible primary carrier sheet with a first flexible layer of bentonite disposed on top of the primary carrier sheet. A middle or intermediate flexible

layer of sheet material or fabric is disposed on top of the first layer of bentonite and an optional second flexible layer of bentonite is disposed on top of the middle or intermediate layer. Finally, a  
5 top flexible cover sheet is disposed on top of the second layer of bentonite.

In the alternative, the middle or intermediate flexible layer of sheet material or fabric may be disposed adjacent to the cover sheet  
10 or with only a single layer of bentonite disposed between the intermediate layer and the primary carrier sheet. Also, the intermediate layer may be disposed adjacent to the primary carrier sheet with only a single layer of bentonite disposed between  
15 the intermediate layer and the cover sheet.

The intermediate flexible layer can provide improved low permeability characteristics and controlled permeability characteristics. Specifically, if the intermediate layer is in the  
20 form of a sheet, the intermediate sheet may be fabricated from a flexible sheet of plastic material that will not permit the migration of any substantial amounts of liquid. Alternatively, the intermediate sheet may be fabricated from a flexible  
25 plastic sheet that will permit the migration of small, controlled amounts of liquid.

The intermediate layer may also be provided in the form of a flexible coating of polymer over the first bentonite layer. Again, an  
30 optional second flexible bentonite layer may be disposed on top of the coating of polymer material.

Further, the low permeability characteristics of the present invention may be enhanced by constructing the GCL with a high

swelling, low permeability and/or chemically altered bentonite clay.

The structural stability of the GCL of the present invention may also be enhanced by using an  
5 intermediate flexible sheet of a corrugated or wave-like configuration. The intermediate layer may also be altered chemically or mechanically in a way to enhance the adherence of the bentonite to the intermediate layer. If the intermediate layer is in  
10 the form of a polymer that is sprayed on or otherwise applied to the first layer of bentonite, the polymer may be chosen so it attains a relatively rigid structure after it dries, while maintaining flexibility to the overall GCL, so it can contribute  
15 to the structural stability of the flexible GCL as well.

It will be noted that the bottom flexible sheet that engages the ground is generally known as the primary carrier sheet and that the top sheet on  
20 which landfill material is deposited is generally known as the cover sheet. These materials must be flexible to allow the GCL to bend in correspondence to the contours and shapes of the surface that it covers. However, it will also be noted that the  
25 primary carrier sheet and cover sheet may be made of identical fabric thereby enabling either the top or bottom sheet to face downward. In any event, this invention is not limited to a specific primary carrier sheet material or any specific top cover  
30 sheet material.

The present invention also lends itself to an improved method of manufacturing an improved flexible GCL which comprises the following steps. The first layer of bentonite, in a granular form,  
35 powdered form, or mixtures, is disposed on top of

either a primary flexible carrier sheet or flexible cover sheet. An intermediate layer of flexible sheet material, in one embodiment, is disposed on top of the first layer of bentonite. An optional  
5 second flexible layer of bentonite is disposed on top of the intermediate sheet material layer before either the cover sheet or the primary carrier sheet is disposed on top of the second layer of bentonite to complete the sandwich-type construction of the  
10 flexible GCL. Then, the GCL can be held together in a variety of methods including gluing, sewing or needle-punching. Glue can be applied to the inside-facing surfaces of the primary and cover sheets as well as the intermediate sheet or layer during  
15 construction. Glue may also be applied to the layers of bentonite.

It is therefore an object of the present invention to provide a flexible GCL with improved low permeability characteristics.

20 Yet another object of the present invention is to provide a flexible GCL with controlled permeability characteristics.

It is still another object of the present invention to provide an improved method of  
25 manufacturing flexible GCLs.

Other objects and advantages of the present invention will become apparent upon reading the following detailed description of the drawings and appended claims, and upon reference to the  
30 accompanying drawings.

**BRIEF DESCRIPTION OF THE DRAWINGS**

The invention is illustrated more or less diagrammatically in the accompanying drawings wherein:

5                Figure 1 is a sectional view of a flexible geosynthetic clay liner made in accordance with the present invention;

                 Figure 2 is a sectional view of another flexible geosynthetic clay liner made in accordance  
10                with the present invention;

                 Figure 3 is a schematic illustration of one method of fabricating a deformed intermediate sheet to be used in flexible geosynthetic clay  
15                liners made in accordance with the present invention;

                 Figure 4 is a schematic illustration of one method of manufacturing a flexible geosynthetic clay liner in accordance with the present invention;

                 Figure 5 is a schematic illustration of  
20                another method of fabricating a flexible geosynthetic clay liner in accordance with the present invention; and

                 Figure 6 is a schematic illustration of another preferred embodiment of manufacturing the  
25                flexible geosynthetic clay liner in accordance with the present invention wherein an intermediate sheet material layer is permanently adhered directly to the primary carrier sheet, e.g., with glue, or pre-adhered as received from a supplier, prior to  
30                adding a layer of bentonite clay and then the cover layer.

It should be understood that the drawings are not necessarily to scale and that the embodiments are sometimes illustrated by diagrammatic representations and fragmentary views.

5 In certain instances, details which are not necessary for an understanding of the present invention or which render other details difficult to perceive may have been omitted. It should be understood, of course, that the invention is not

10 necessarily limited to the particular embodiments illustrated herein.

#### **DETAILED DESCRIPTION OF THE DRAWINGS**

Like reference numerals will be used to refer to like or similar parts from Figure to Figure

15 in the following description of the drawings.

A sectional view of a flexible GCL made in accordance with the present invention is illustrated in Figure 1. Specifically, the flexible GCL 10 of the present invention includes a flexible primary

20 carrier sheet 11, a first flexible layer 12 of bentonite, in powdered or granular form, preferably in granular form, a flexible intermediate sheet or layer 13, a second flexible layer 14 of bentonite, again preferably in granular form, and a flexible

25 cover sheet 15. Again, it will be noted that the cover sheet 15 and primary carrier sheet 11 may very well be interchangeable. The intermediate layer or sheet 13 as shown in Figure 1 has the ability to dramatically decrease the effective permeability

30 of the GCL 10. In effect, the GCL 10 as shown in Figure 1 can be an ultra low permeability flexible GCL if the flexible intermediate sheet or layer 13

is fabricated from a ultra low permeability material, such as many plastics that are known in the art. The intermediate layer 13 may also be altered chemically or mechanically to enhance the adherence of the bentonite layers 12, 14 to the intermediate layer 13.

The intermediate sheet or layer 13 may be applied in two ways. First, if the intermediate sheet 13 is indeed in sheet form, the sheet maybe simply disposed on top of the first layer of bentonite as shown below in Figure 5. However, if the intermediate layer 13 is a layer of polymer material which is sprayed or otherwise applied in liquid or molten form onto the first bentonite layer 12, the intermediate layer 13 is then applied in accordance with the process shown in Figure 4.

An additional improvement is illustrated by the GCL 20 shown in Figure 2. Again, the GCL 20 includes a carrier sheet 11, a first layer of bentonite 12, a second layer of bentonite 14 and cover sheet 15. However, the GCL 20 includes a flexible rippled or corrugated intermediate sheet or layer 21 which enhances the structural stability of the GCL 20 because the bentonite layers 12, 14 become very slippery when exposed to water. By providing a flexible intermediate sheet or layer, particularly a flexible layer 21, with ripples, corrugations or other alterations which may be mechanical or chemical in nature, a higher frictional surface may be provided to deter or retard slippage between the bentonite clay layers 12, 14 and the intermediate sheet 21. Chemical or mechanical alterations of the intermediate layer 21 may be used to enhance the adherence of the bentonite layers 12, 14 to the intermediate

layers 21. The result is a flexible GCL 20 with the improved permeability characteristics discussed above with respect to the GCL 10 and also with an improved structural stability.

5 In addition, specific grades or types of bentonite may be selected to enhance the low permeability characteristics of the GCLs 10, 20. A high swelling, low permeability or chemically altered bentonite clay may be selected. One  
10 particularly preferable type of clay is western bentonite. The layers of bentonite 12, 14 are applied in amounts approximating one-half pound per square foot but do not have to be applied in equal amounts. Amounts in each layer may vary between  
15 zero and 2 pounds per square foot.

Typically, a GCL without an intermediate sheet 13 or 21 will have an overall effective permeability from  $1 \times 10^{-7}$  cm/sec to  $5 \times 10^{-9}$  cm/sec, depending in the confining stress applied to the  
20 GCL. The incorporation of an intermediate sheet or layer such as 13, 21 will provide a flexible GCL with an effective permeability of at least as low as  $5 \times 10^{-10}$  cm/sec, preferably a permeability of  $1 \times 10^{-10}$  cm/sec or less, and more preferably a  
25 permeability of approximately  $5 \times 10^{-11}$  cm/sec or less at low confining stresses, thereby providing a substantial improvement.

The intermediate flexible sheets may be fabricated from polyvinylchloride, polyethylene,  
30 polypropylene, nylon or other polymeric compounds. Such materials normally weigh between 0.5 to 25 ounces per square yard.

If a controlled permeability is desired, other flexible sheet or fabric materials that  
35 offer combinations of controlled or directional

permeability may be considered for the intermediate sheets or layers 13, 21. Such materials include battery separator fabrics, fabrics used in disposable diapers and protective clothing.

5           Figure 3 is an illustration of one method of providing a flexible corrugated or rippled intermediate sheet 21. The sheet 21 is fed between an upper 22 and lower 23 embossing roller to provide the ripple or corrugated effect.

10           Improved methods of manufacturing low or controlled permeability flexible GCLs 30 and 40 are illustrated in Figures 4 and 5, respectively. Briefly, the flexible carrier sheet 11 is unrolled from the roll 25. The first layer of bentonite 12  
15   is deposited on the carrier 11 as it passes under the hopper 26. The intermediate flexible layer 13 may be applied via one or more spray nozzles or other methods of applying a liquid or molten  
20   layer of bentonite 14 is deposited on top of the intermediate layer 13 as the partially-fabricated GCL passes under the hopper 28. Finally, the top flexible carrier 15 is deposited on top of the second layer of bentonite 14 as the GCL passes  
25   underneath the roll 29.

          The method illustrated in Figure 5 employs the same steps except that the intermediate sheet 13 is provided by the roll 31 as opposed to the nozzles 27 as shown in Figure 4.

30           In accordance with another preferred embodiment of the present invention, shown in Figure 6, the intermediate flexible sheet material layer 13, preferably a flexible sheet 13 of polymeric material, e.g., a polyolefin, such as polyethylene  
35   or polypropylene, is permanently adhered directly to

the inner surface of the flexible carrier layer 11, or directly to an inner surface of the flexible cover sheet 15, for example, using an adhesive from an adhesive spraying on coating device 27, prior to  
5 applying the layer 14 of bentonite clay over the intermediate sheet material layer 13 and then overlaying the flexible cover sheet 15 over the bentonite clay layer 14, to form flexible GCL 50. One of the advantages of the GCL construction shown  
10 in Figure 6 is that when the GCL 50 is used, for example, on a sloping surface of a landfill cap, disposed such that the textile/adhered sheet of flexible polymeric sheet material layer is on the upper surface, water travelling over the upper  
15 fabric surface will not leach bentonite clay out of the GCL 50 (through the upper fabric layer) since the upper fabric layer is lined on its interior surface with a water-impermeable or low permeability polymeric sheet material layer. The polymeric sheet  
20 material layer will, therefore, prevent moving water travelling over an upper surface of the GCL from eroding or entraining the bentonite clay out of the upper surface of the article. Similarly, if moving water travels under the GCL 50 of Figure 6, the  
25 fabric/adhered polymeric sheet material layer will be disposed downwardly, so that the lower fabric has its inner surface adhered to the polymeric sheet material layer to prevent loss of bentonite clay through the outer surface of the lowermost fabric  
30 layer.

It should be understood that while Figure 6 shows the flexible carrier sheet 11 being glued to the polymeric sheet material layer 13 during manufacture, these two layers could be provided in  
35 prelaminated form prior to manufacture, to eliminate

a manufacturing step. In addition to adhesively affixing the flexible intermediate polymeric sheet material layer 13 to the flexible carrier layer 11 or to the flexible cover layer 15, any other method  
5 can be used to permanently adhere the polymeric sheet material layer 13 to the inner surface of the carrier layer 11 or to the inner surface of the cover layer 15, for example, melt bonding, or spraying a polymeric melt onto the inner fabric  
10 surface.

Although only two embodiments of the present invention have been illustrated and described, it will at once be apparent to those skilled in the art that variations may be made  
15 within the spirit and scope of the invention. Accordingly, it is intended that the scope of the invention be limited solely by the scope of the hereafter appended claims and not by any specific wording in the foregoing description.



- 13 -

CLAIMS

1. An improved flexible geosynthetic clay liner comprising:
  - a flexible primary carrier sheet;
  - a layer of bentonite clay disposed on top of the primary carrier sheet;
  - a flexible intermediate layer disposed on top of the layer of bentonite clay; and
  - a flexible cover sheet disposed on top of the flexible intermediate layer.
2. The geosynthetic clay liner of claim 1, wherein the intermediate layer is fabricated from a sheet of low permeability plastic.
3. The geosynthetic clay liner of claim 1, wherein the intermediate layer is fabricated from a liquid polymer spray.
4. The geosynthetic clay liner of claim 1, wherein the intermediate layer is further characterized as being a controlled permeability sheet.
5. The geosynthetic clay liner of claim 1, wherein adhesive is applied to an upper surface of the primary carrier sheet to assist in adhering the first layer of bentonite clay against the upper surface of the primary carrier sheet and adhesive is applied to a lower surface of the cover sheet to assist in adhering the flexible intermediate layer to the cover sheet.

This Sheet Has Been Replaced





6. The geosynthetic clay liner of claim 5, wherein adhesive is applied to the upper and lower surfaces of the intermediate layer to assist in adhering the layer of bentonite clay and the cover sheet to the intermediate layer.

7. The geosynthetic clay liner of claim 1, further including another layer of bentonite clay disposed between the intermediate layer and the cover sheet.

8. The geosynthetic clay liner of claim 1, wherein an undersurface of the primary carrier sheet has a high-friction surface to enhance frictional engagement between the lower surface of the primary carrier sheet and a sloping surface on which the liner is installed.

9. The geosynthetic clay liner of claim 1, wherein the layer of bentonite clay is contained in the clay liner in an amount of about 0.25 pounds to about 2 pounds of bentonite clay per square foot.

10. The geosynthetic clay liner of claim 7, wherein said another layer of bentonite clay is contained in the clay liner in an amount of about 0.25 pounds to about 2 pounds of bentonite clay per square foot.



11. A method of fabricating the low permeability geosynthetic clay liner of claim 1, the method comprising the following steps:

- (a) providing a flexible primary cover sheet;
- (b) depositing a layer of bentonite clay on top of the primary carrier sheet;
- (c) depositing an intermediate flexible layer on top of the layer of bentonite clay;
- (d) depositing a flexible cover sheet on top of the intermediate flexible layer;
- (e) attaching the cover sheet to the primary carrier sheet with the layer of bentonite clay and intermediate layer disposed therebetween.

12. The method of claim 11, wherein step (c) is further characterized as applying an intermediate flexible layer of polymer material on top of the layer of bentonite clay.

13. The improved flexible geosynthetic clay liner of claim 1, having a water permeability of less than  $5 \times 10^{-10}$  cm/sec, comprising:

- a flexible primary carrier fabric;
- a flexible intermediate layer secured to the primary carrier fabric;
- a layer of bentonite clay disposed on top of the intermediate layer; and
- a flexible cover fabric disposed on top of the layer of bentonite clay.



14. The improved flexible geosynthetic clay liner of claim 7, having a water permeability of less than  $5 \times 10^{-10}$  cm/sec comprising:

- a flexible primary carrier sheet;
- a first layer of bentonite clay disposed on top of the primary carrier sheet;
- a flexible intermediate layer disposed on top of the first layer of bentonite clay;
- a second layer of bentonite clay disposed on top of the intermediate layer; and
- a flexible cover sheet disposed on top of the layer of bentonite clay.

15. An improved flexible geosynthetic clay liner of claim 1 comprising:

- a flexible primary carrier sheet;
- a layer of bentonite clay disposed on top of the primary carrier sheet; and
- a fabric lined with a water-impermeable plastic sheet material disposed on top of the layer of bentonite clay, such that the plastic sheet material is in contact with the layer of bentonite clay.

16. The geosynthetic clay liner of claim 14, wherein the intermediate layer is further characterized as being a water-impermeable sheet.

17. The geosynthetic clay liner of claim 15, wherein the intermediate layer is characterized as being a water-impermeable sheet.