

2003053428
18/09/03

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 October 2002 (03.10.2002)


PCT

(10) International Publication Number
WO 02/077392 A1

- (51) International Patent Classification⁷: **E04G 1/26** (74) Agents: ANDERSSON, Per et al.; Albihns Göteborg AB, Box 142, S-401 22 Göteborg (SE).
- (21) International Application Number: PCT/SE02/00240
- (22) International Filing Date: 13 February 2002 (13.02.2002)
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data:
0101069-3 27 March 2001 (27.03.2001) SE
- (71) Applicant (for all designated States except US): **PLU-SEIGHT SAFETY AB** [SE/SE]; Box 10, S-430 63 Hindås (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **WALLTHER, Harry** [SE/SE]; Limmerhultsvägen 60, S-430 63 Hindås (SE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DEVICE FOR HUMAN PROTECTION IN SCAFFOLDING

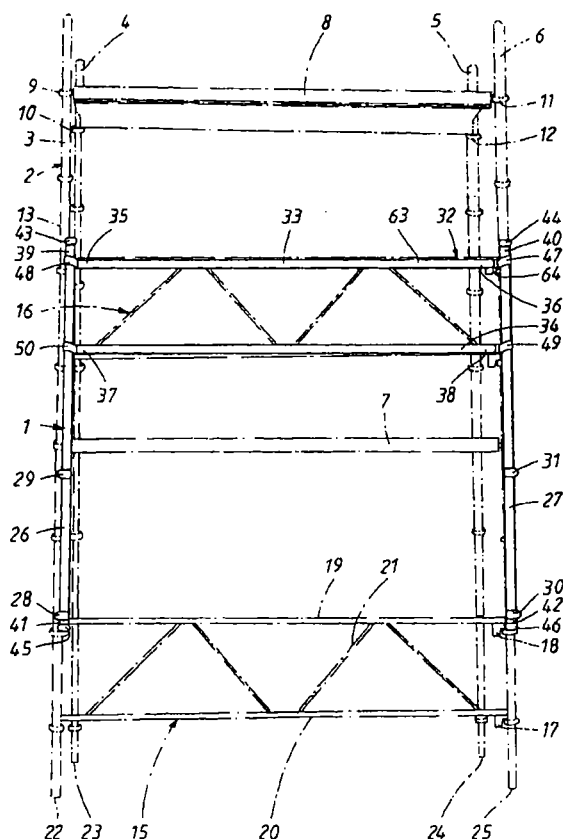

(57) Abstract: The present invention relates to a device for personal protection at such scaffolds that consist of scaffold posts (5, 6) and lying scaffold elements (7, 8, 15), coupled between the posts. The protective device consists of two protective post (26, 27) and a protective rail (32) with a variable length that extends between the protective posts. The protective rail is equipped with joint devices in their ends for a joined connection between the protective posts. The protective posts are equipped with coupling devices (28-31) for releasable connection with the scaffold. Thus the protective posts and the associated protective rail may gradually be moved between different vertical positions due to the need for protection.



ACTION



162162

WO 02/077392 A1

WO 02/077392 A1

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.