



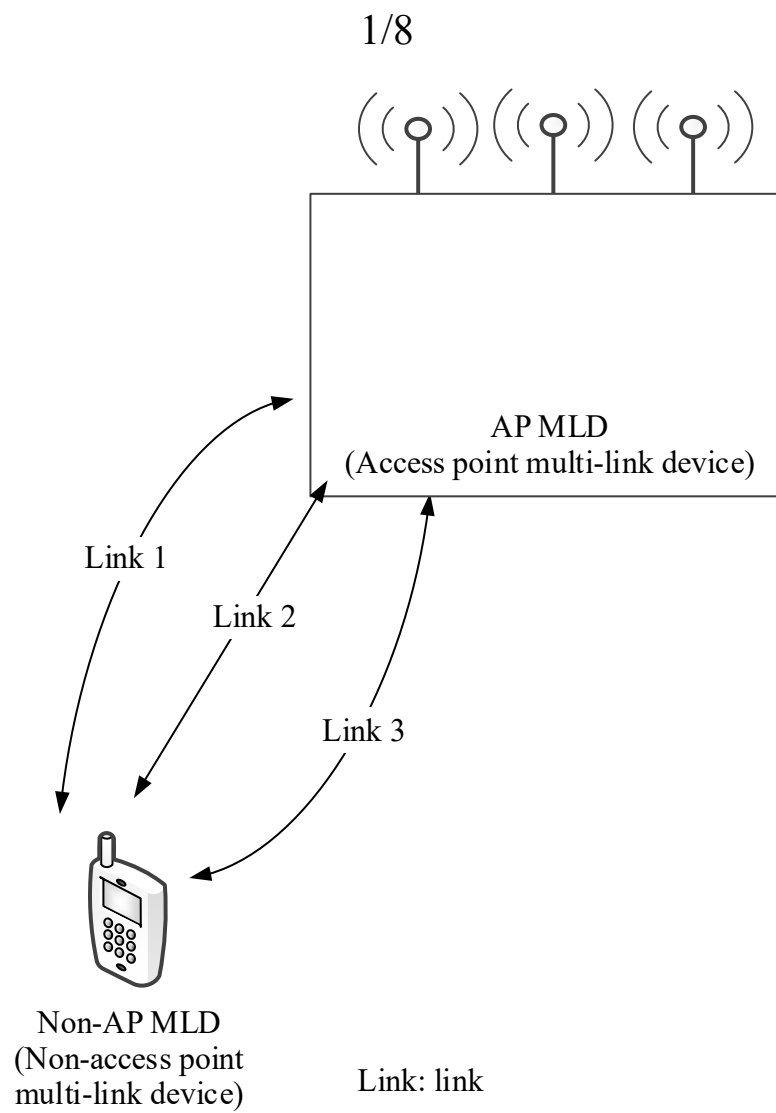


FIG. 1A

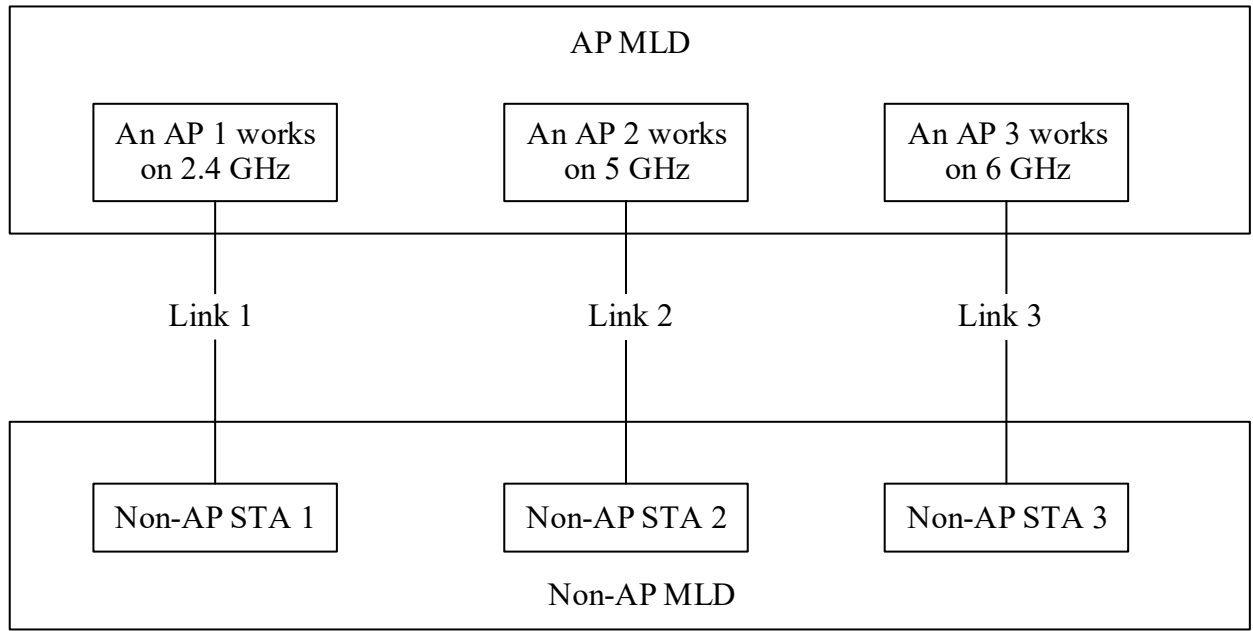

AP MLD: access point multi-link device
 Non-AP MLD: non-access point multi-link device
 AP: access point
 Non-AP: non-access point
 Link: link
 STA: station

FIG. 1B

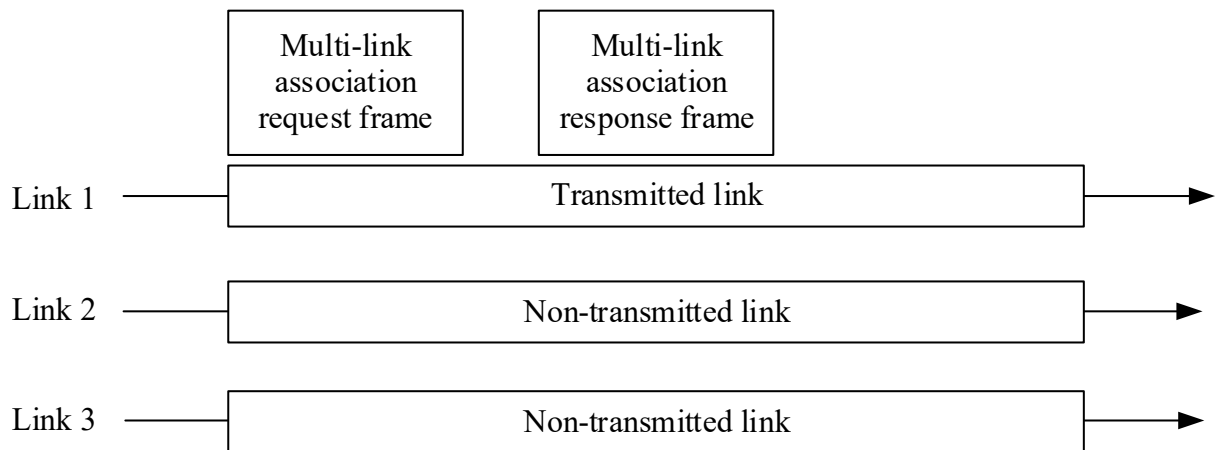

Link: link
 Transmitted link: transmitted link
 Non-transmitted link: non-transmitted link
 Multi-link association request frame: multi-link association request frame
 Multi-link association response frame: multi-link association response frame

FIG. 2

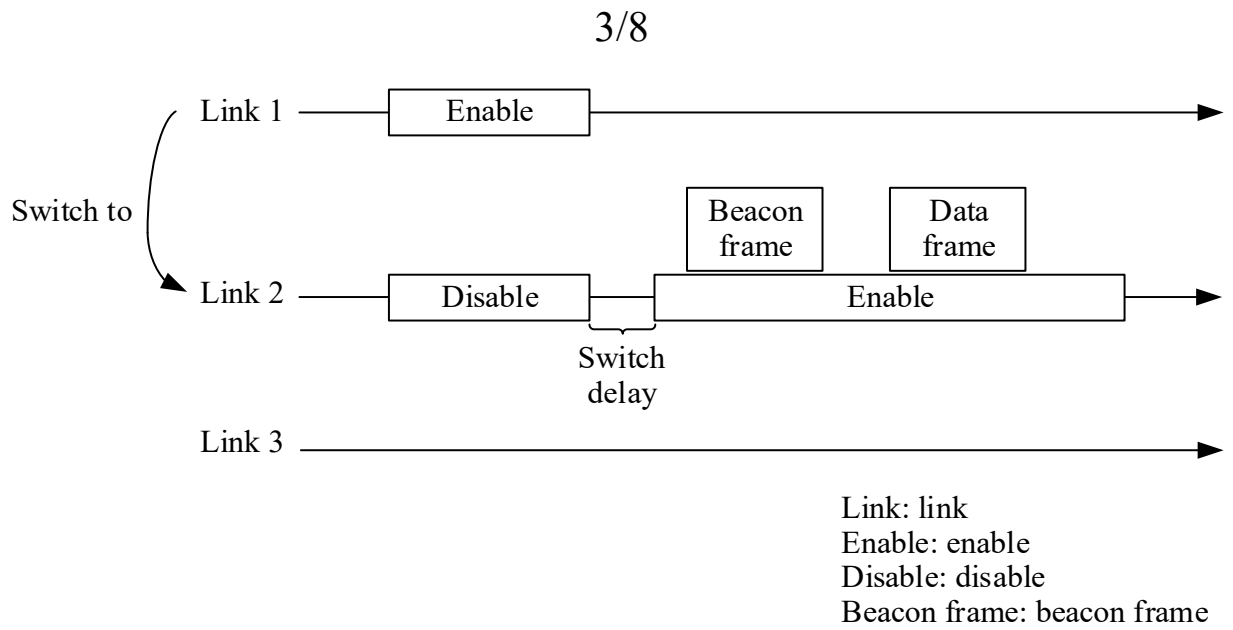


FIG. 3

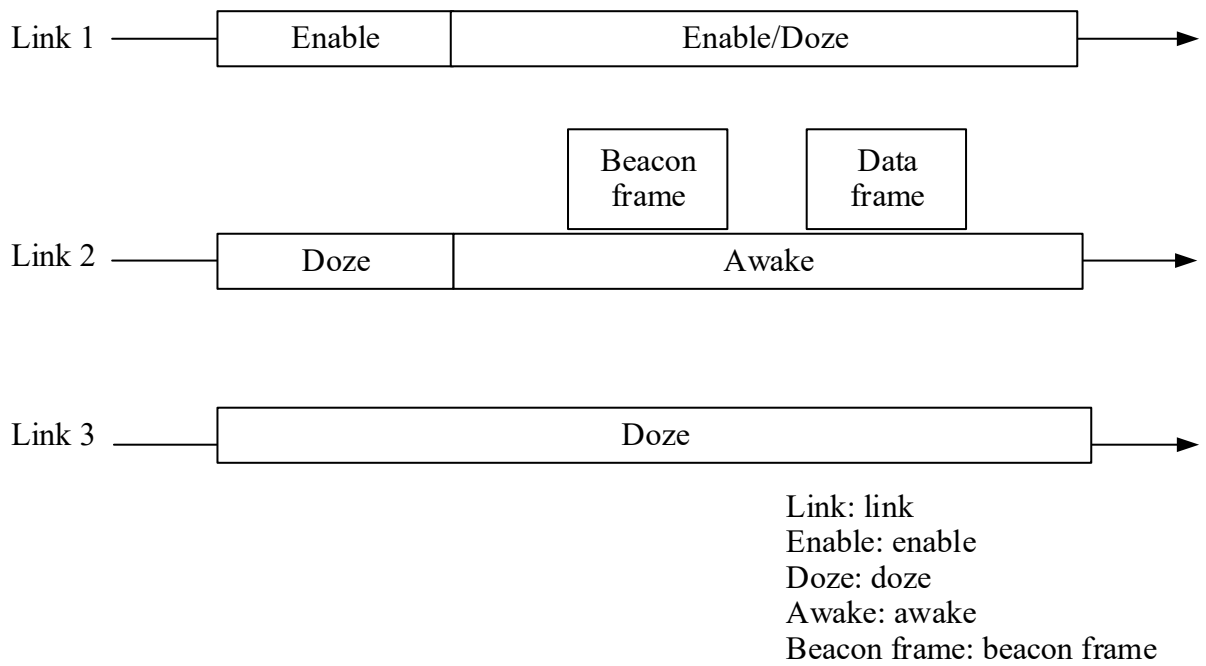


FIG. 4

4/8

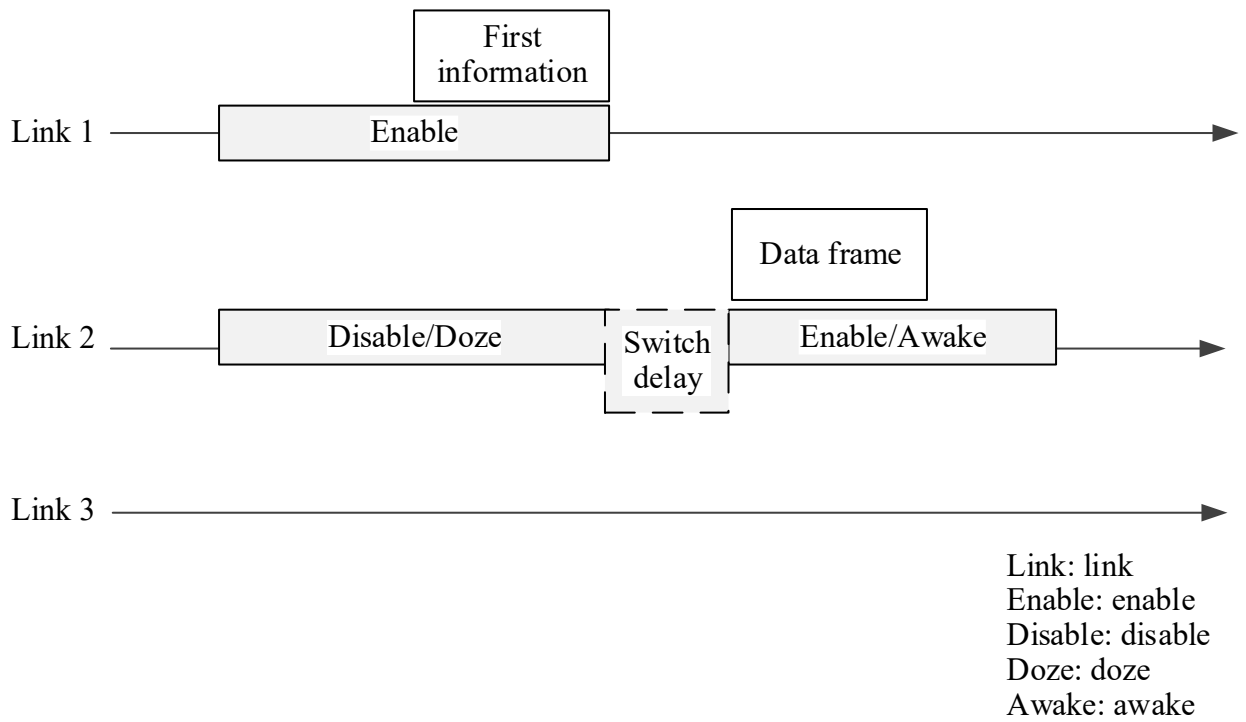


FIG. 5A

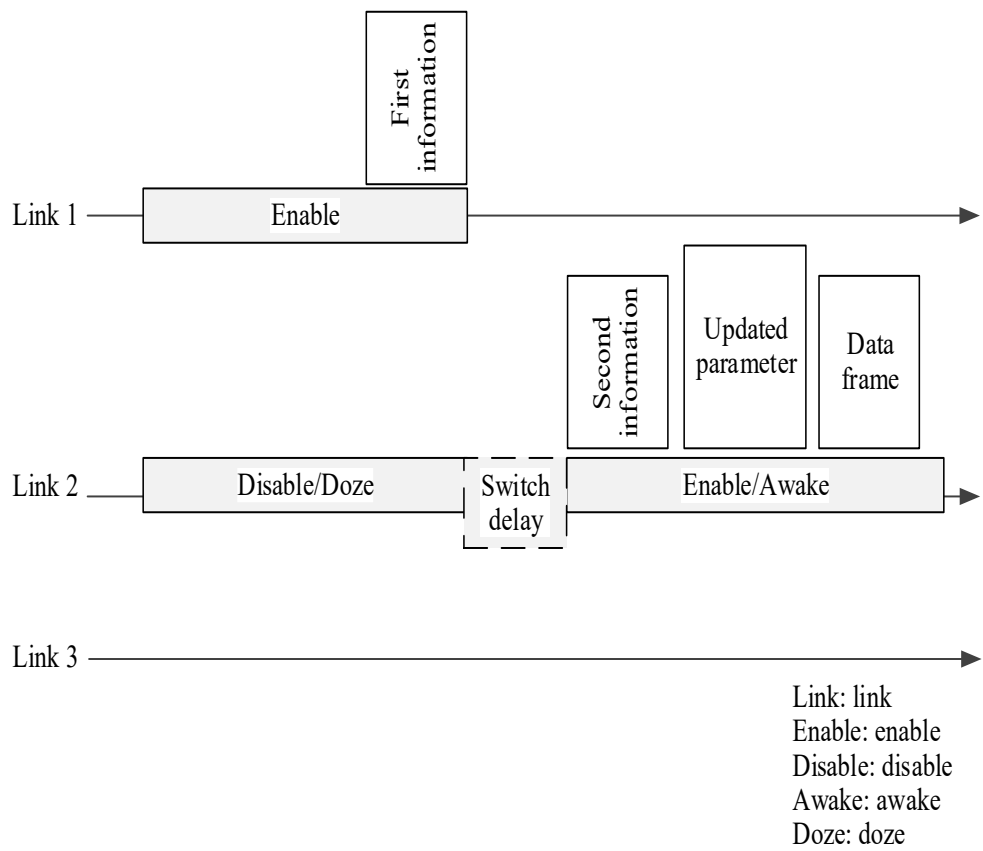


FIG. 5B

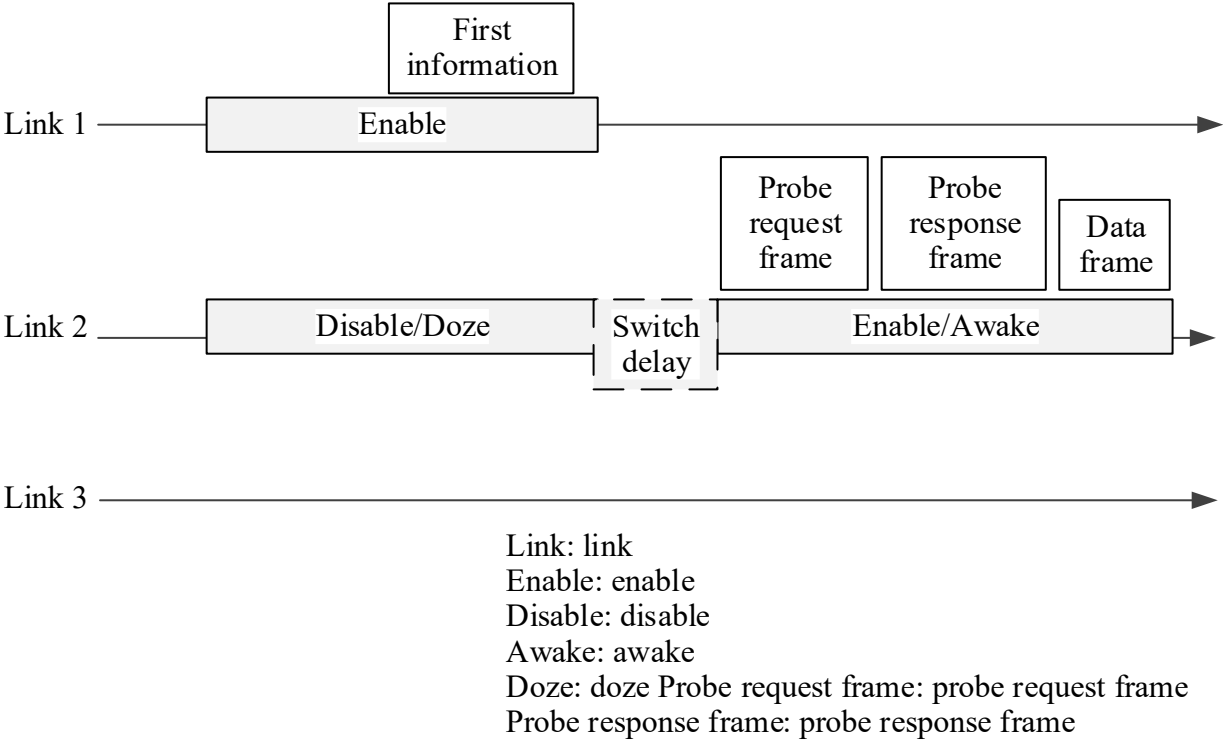


FIG. 5C


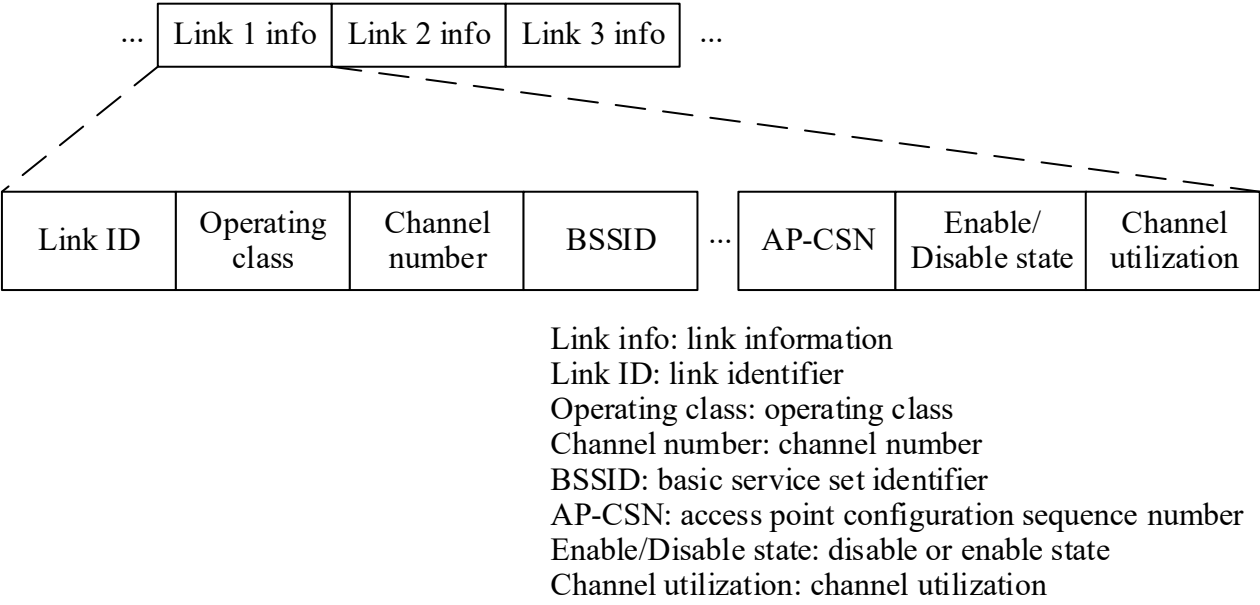


FIG. 6

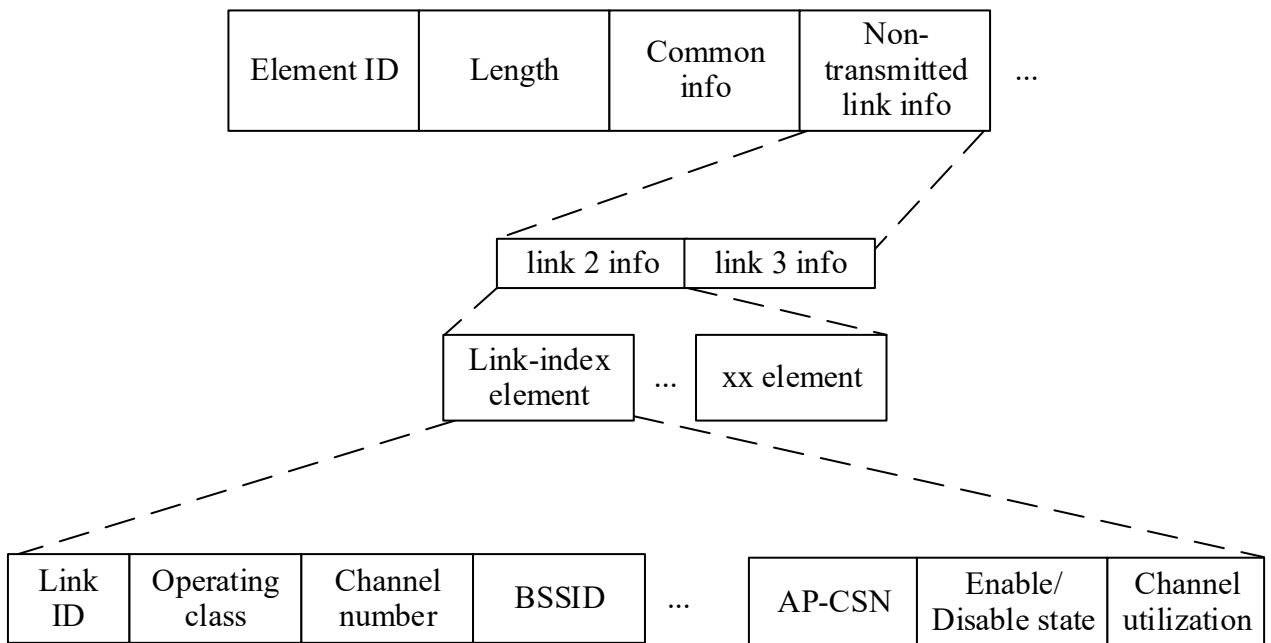

Element ID: element identifier

Length: length

Common info: common information

Non-transmitted link info: non-transmitted link information

Link-index element: link-index element

xx element: xx element

Link info: link information

Link ID: link identifier

Operating class: operating class

Channel number: channel number


BSSID: basic service set identifier

AP-CSN: access point configuration sequence number

Enable/Disable state: disable or enable state

Channel utilization: channel utilization

FIG. 7

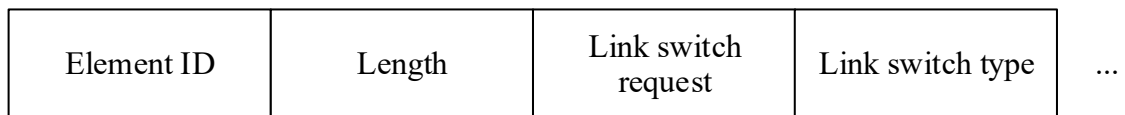

Element ID: element identifier

Length: length

Link switch request: link switch request

Link switch type: link switch type

FIG. 8

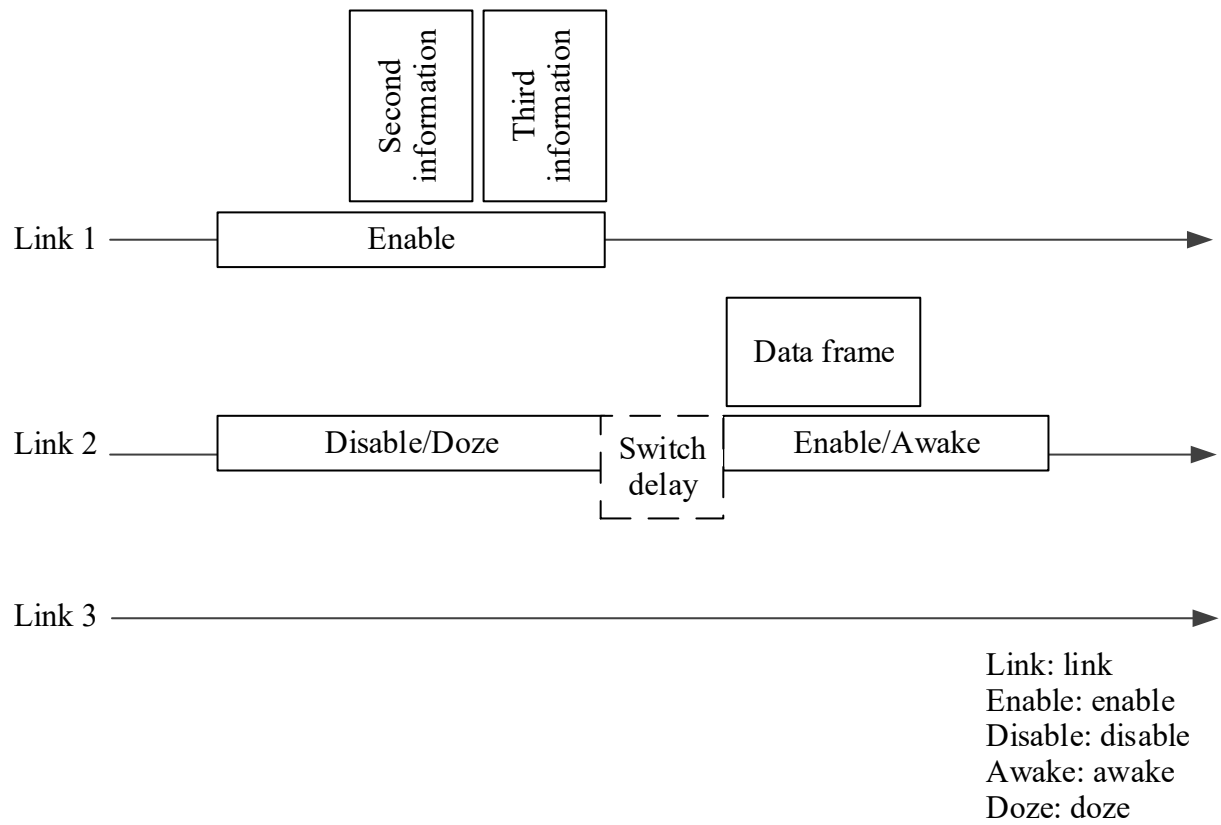


FIG. 9

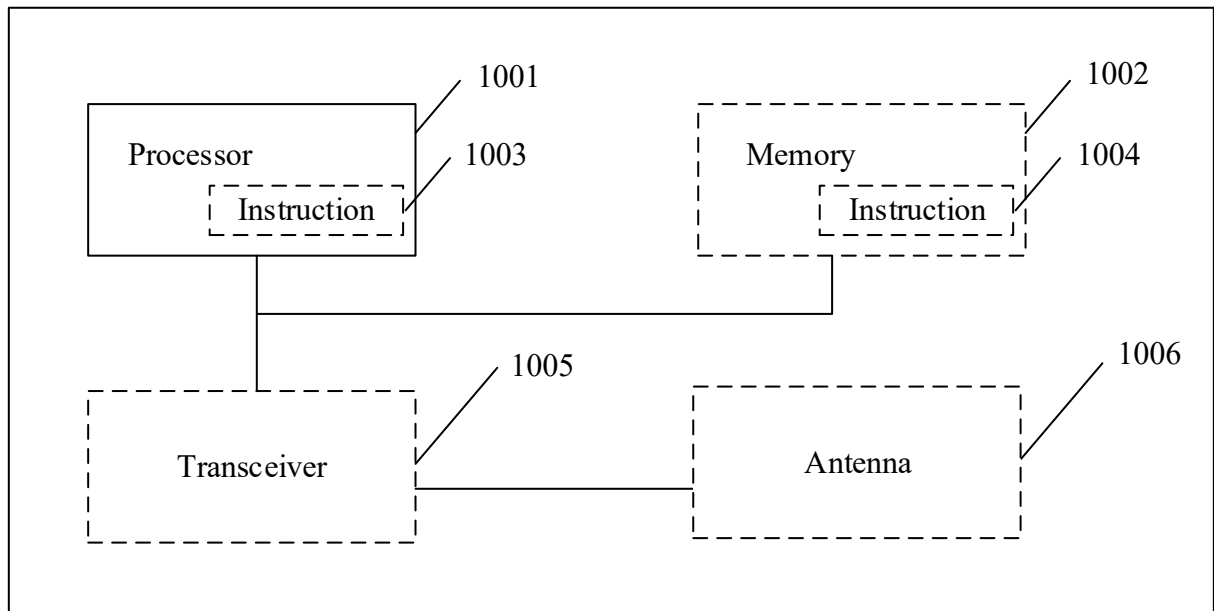


FIG. 10

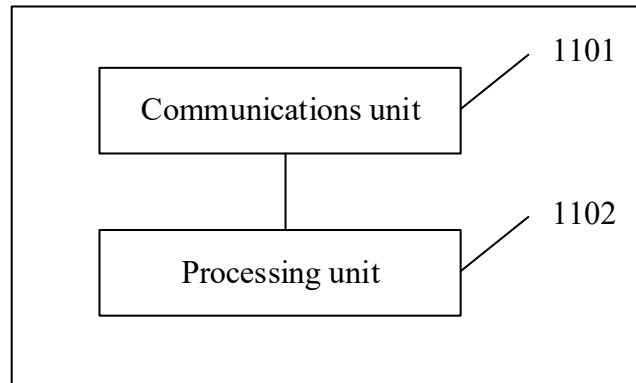


FIG. 11

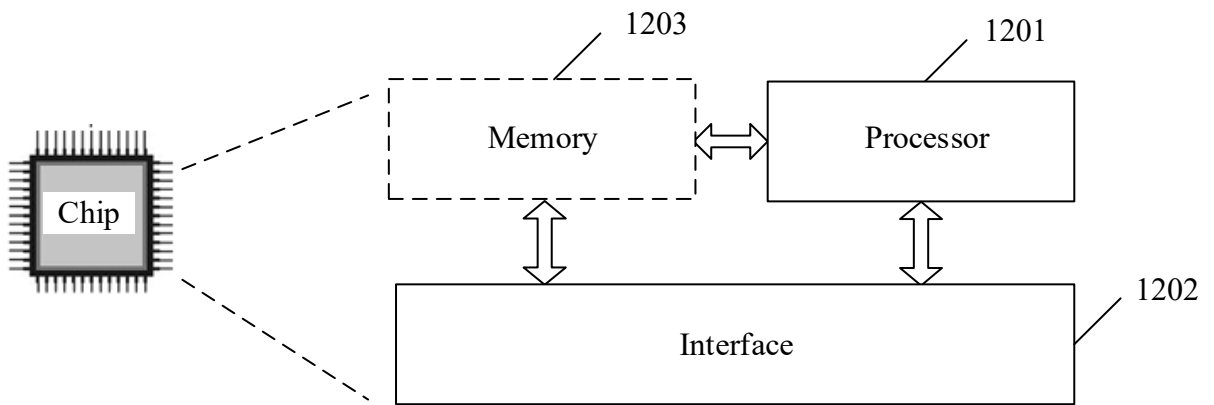


FIG. 12