




[图1]

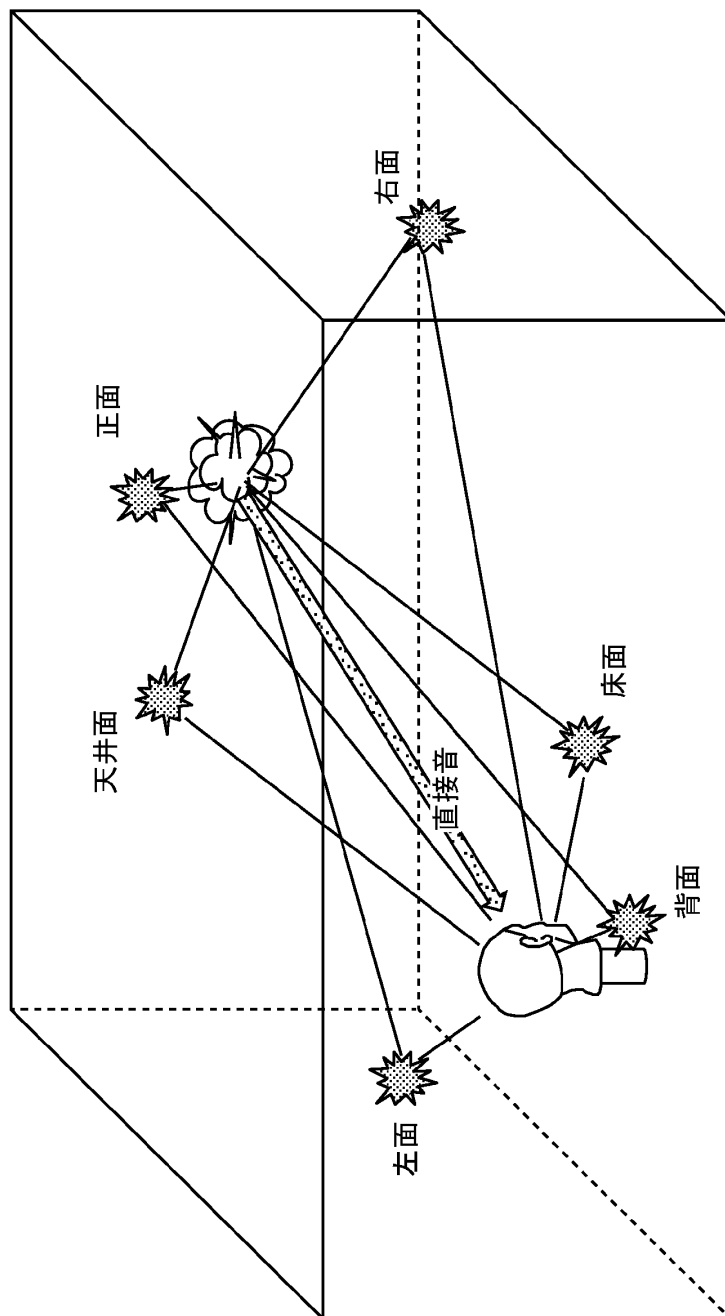


[図2]

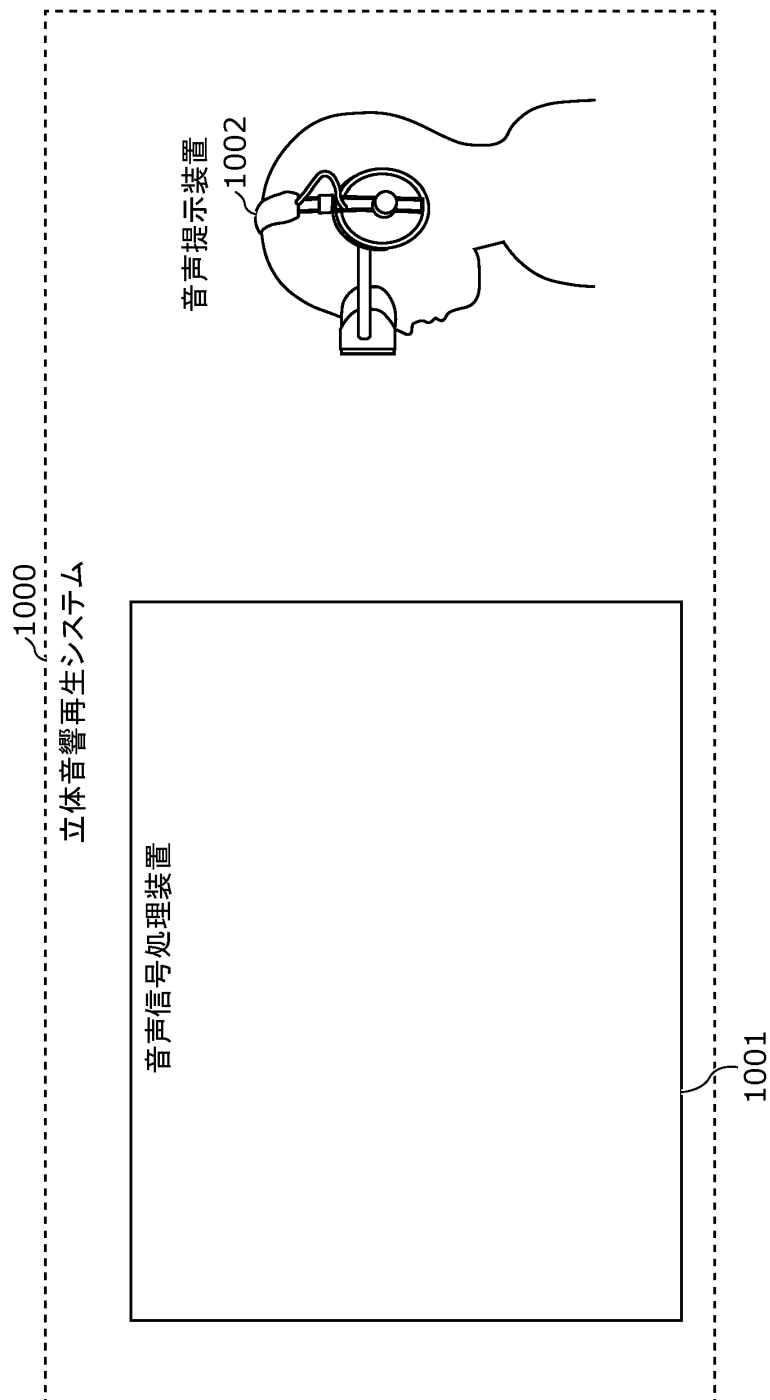


[図3A]

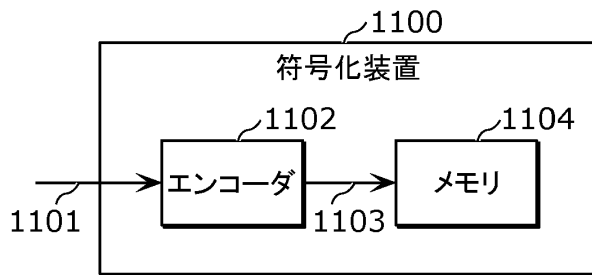


[図3B]

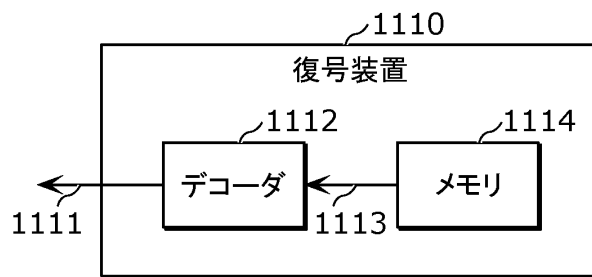


[図3C]

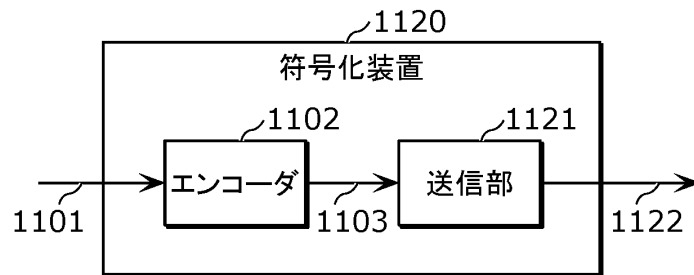


[図3D]

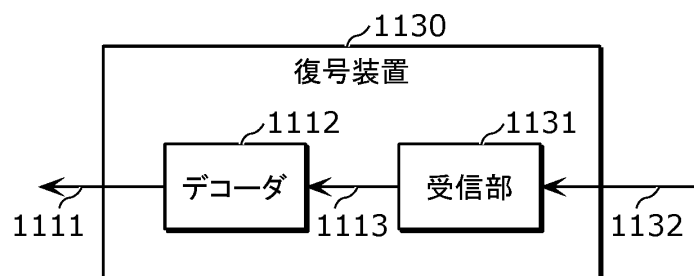


[図4A]

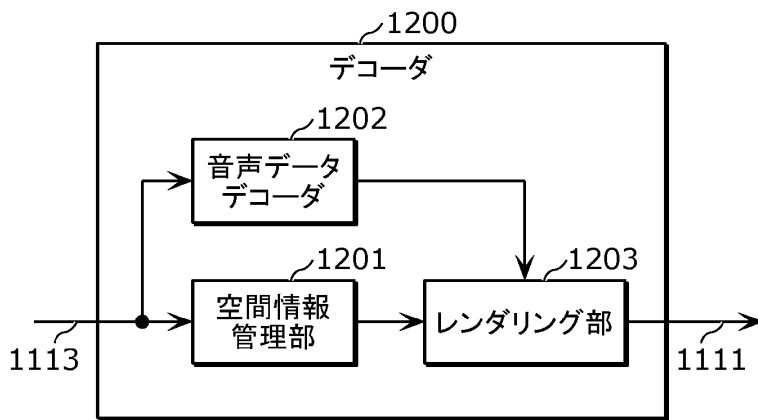


[図4B]

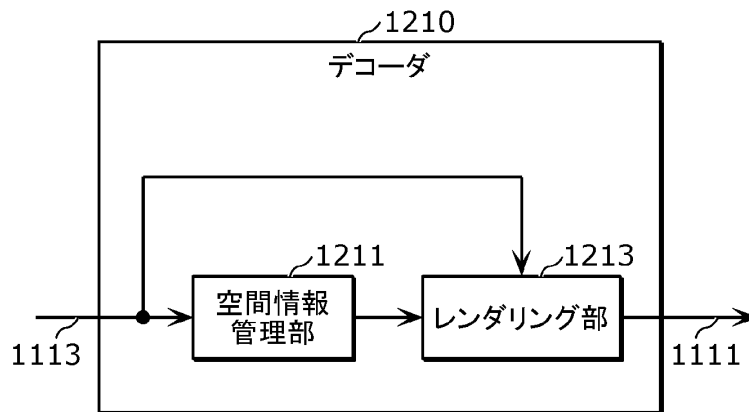


[図5]

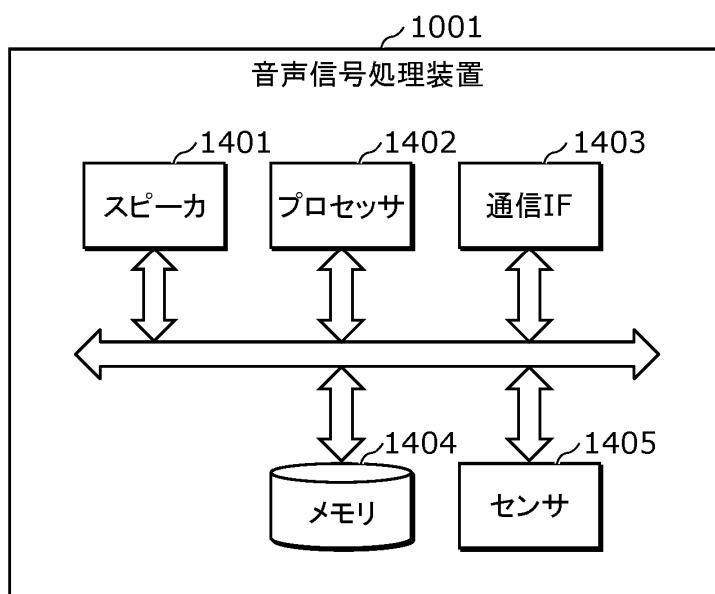


[図6]

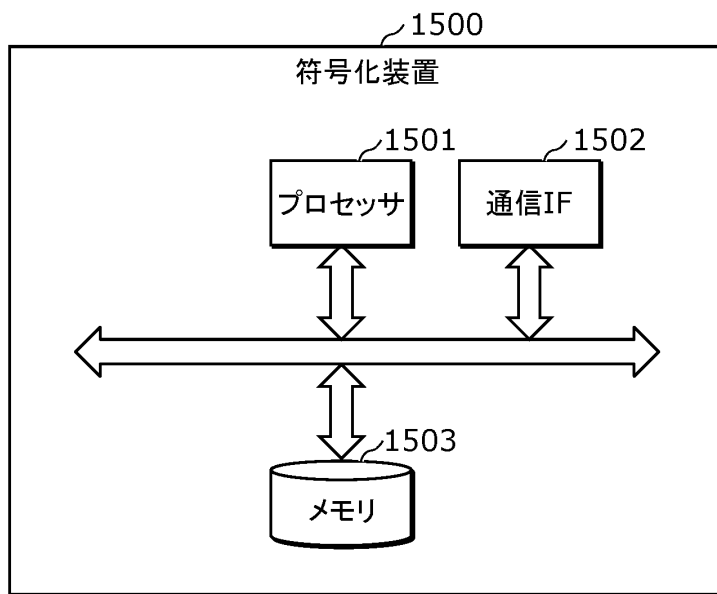


[図7]

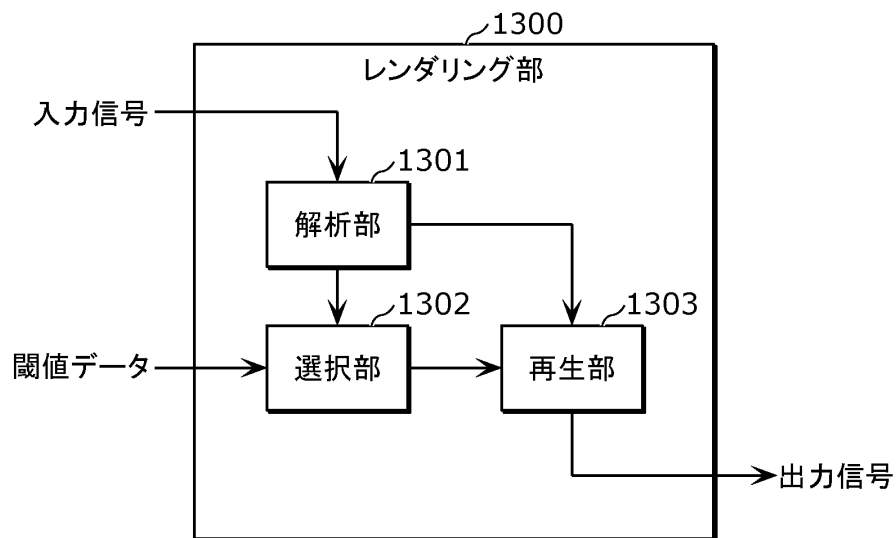


[図8]

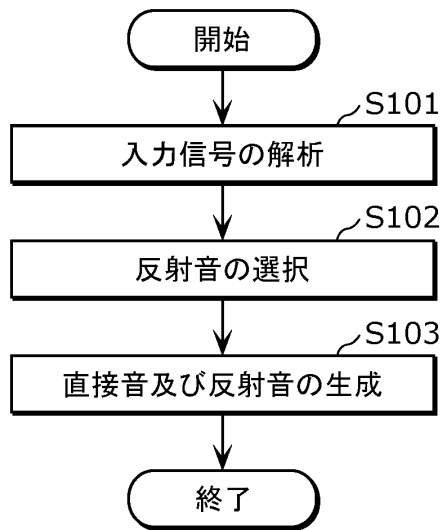

[図9]

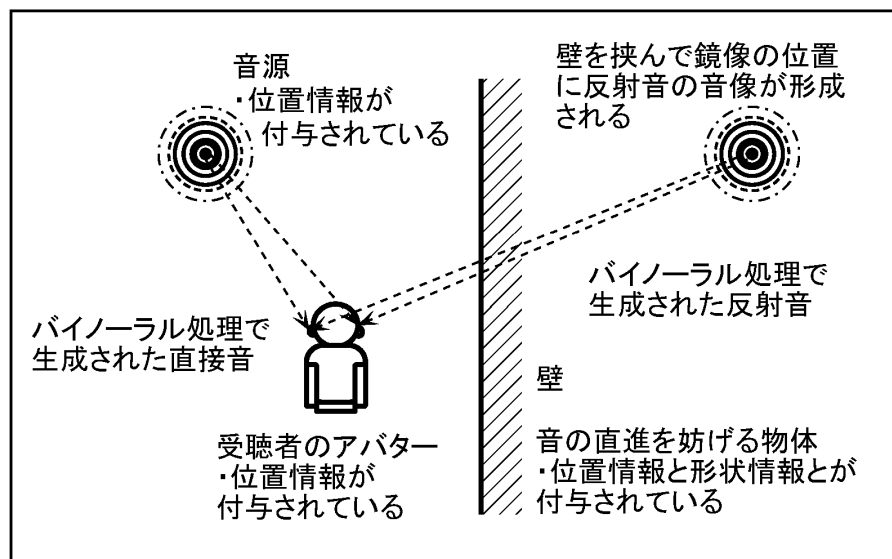


[図10]

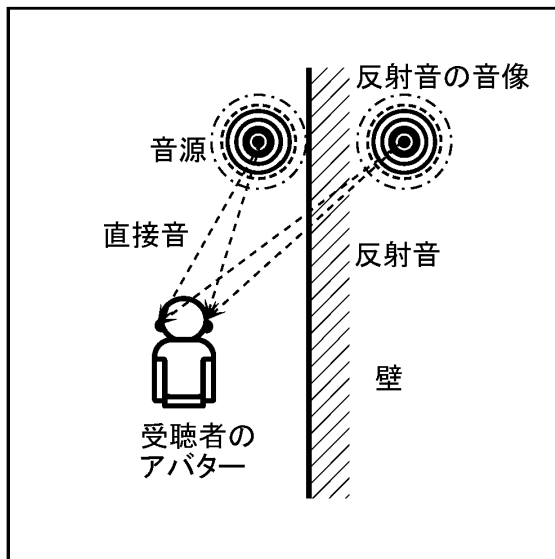

[図11]


T	閾値
5ms	-12.5
10ms	-15.8
20ms	-22.5
30ms	-30.5
40ms	-38.2
50ms	-45.1
60ms	-53.0

[図12A]

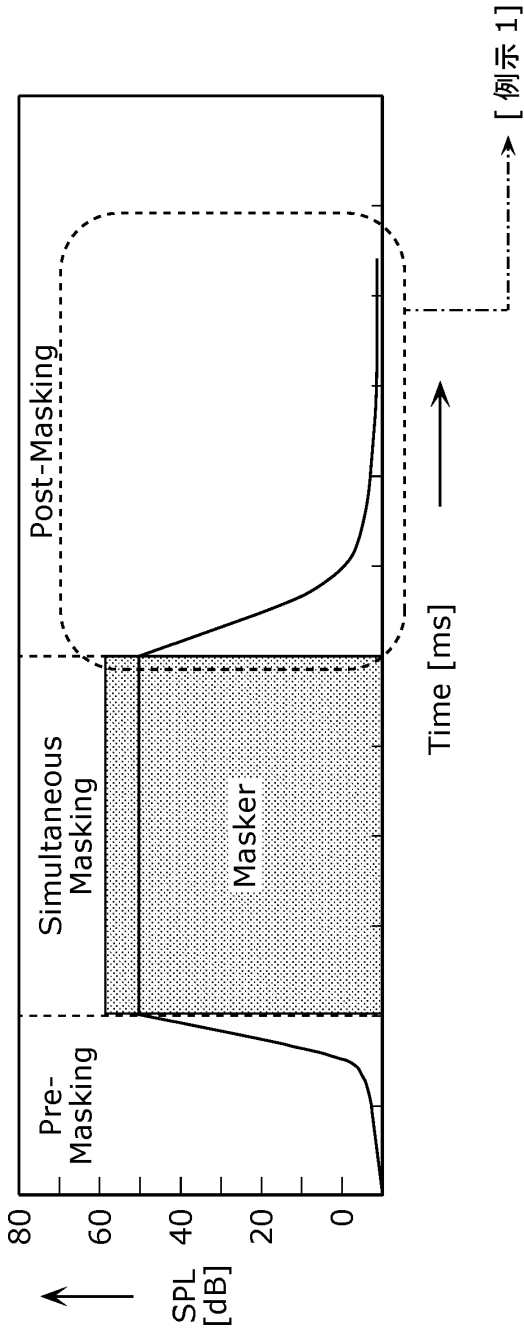


経時マスキングにおけるポストマスキングの
傾向を閾値としてメモリにおいて保持


[図12B]

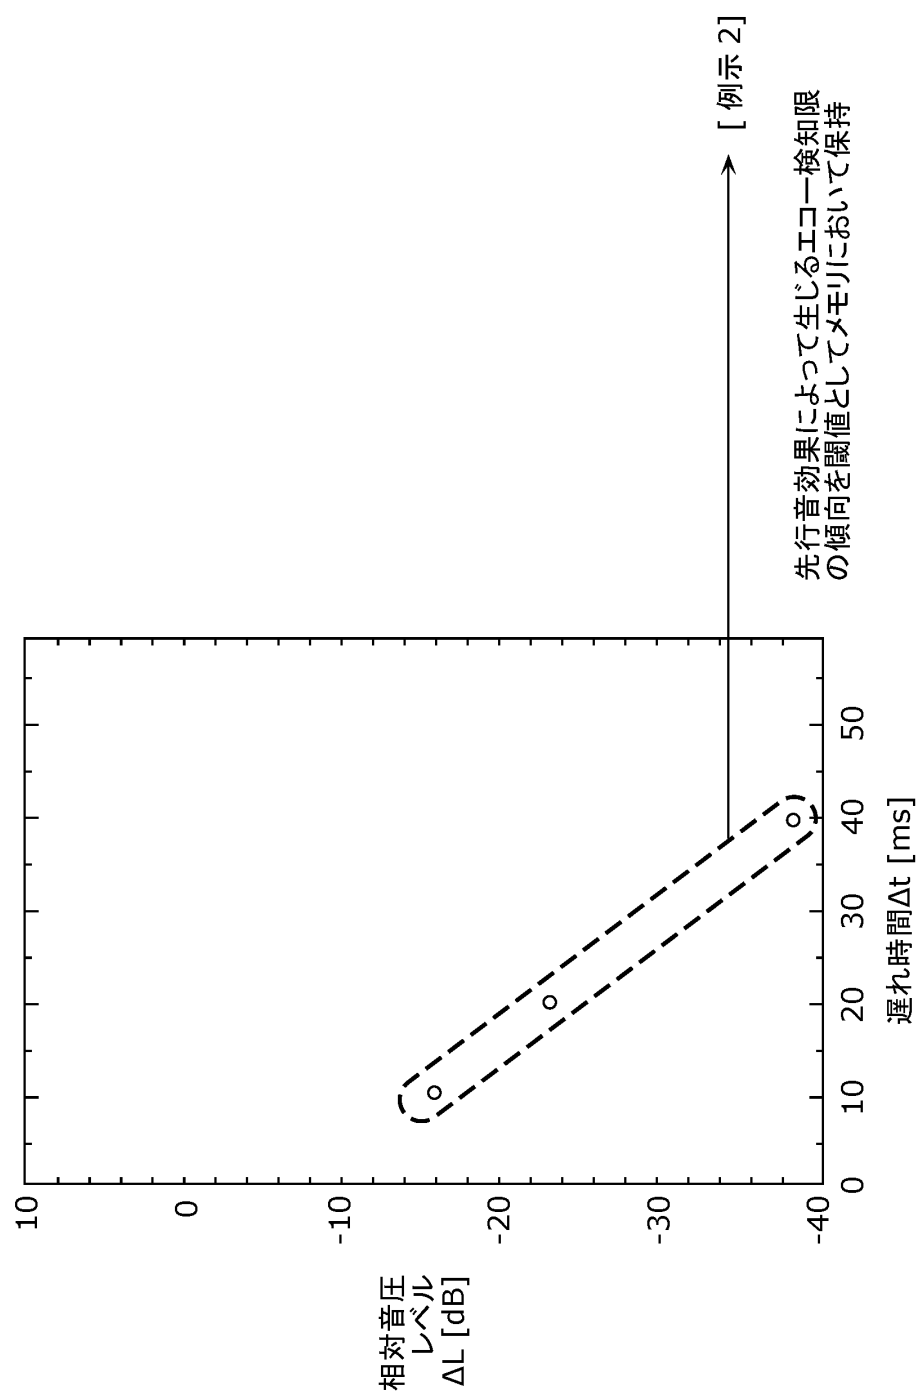


[図12C]

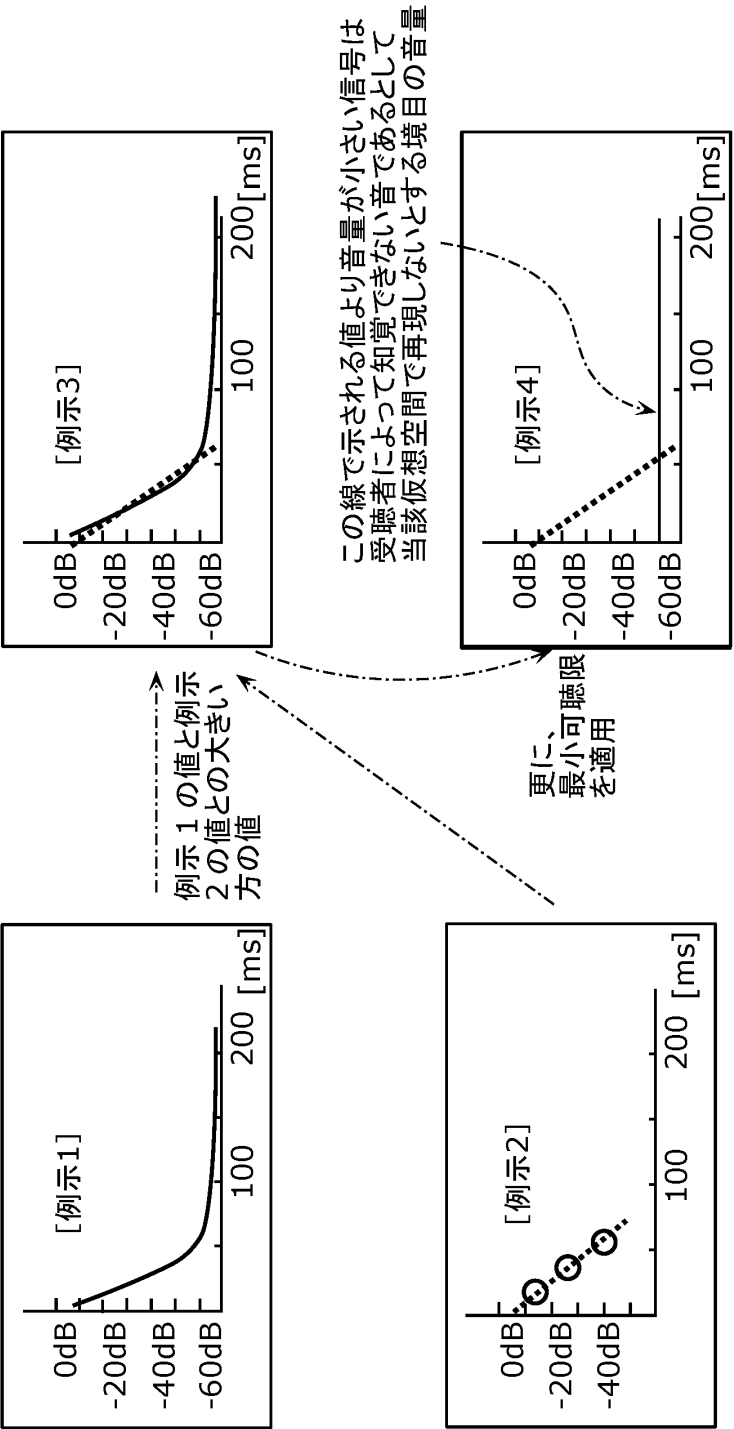

[図13]

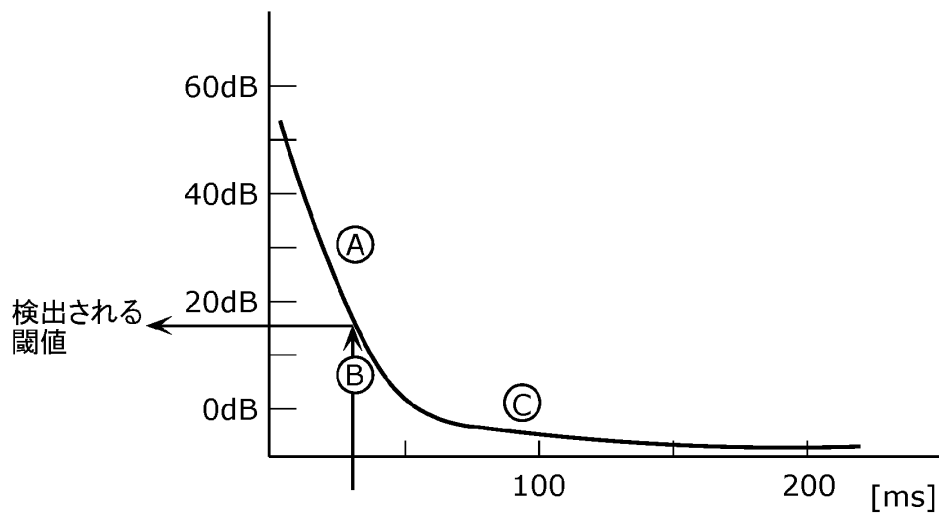

[図14]

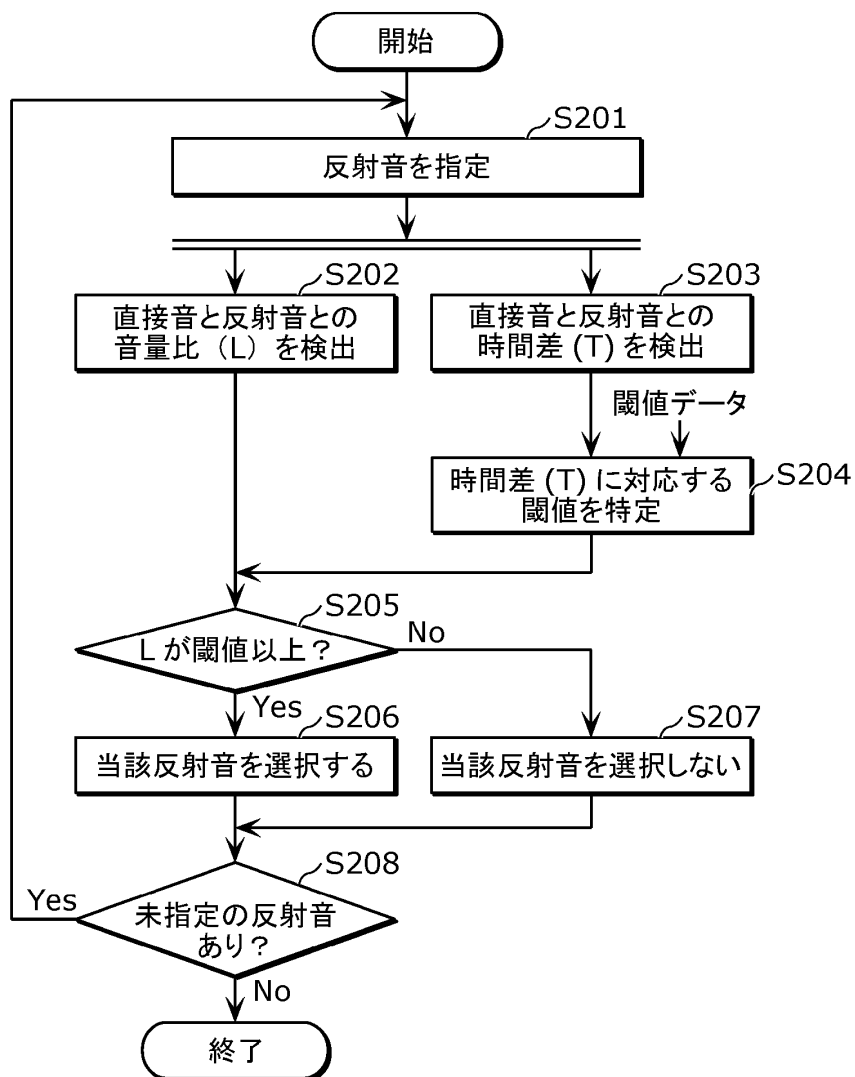


[図15]

直接音の方向 (θ)	反射音の方向 (γ)	T	閾値
0 度	0 度	5ms	-12.5
		10ms	-15.8
		20ms	-22.5
		30ms	-30.5
		40ms	-38.2
		50ms	-45.1
		60ms	-53.0
	45 度	5ms	・ ・
		10ms	・ ・
	315 度	5ms	・ ・
		10ms	・ ・
		20ms	・ ・
		30ms	・ ・
		40ms	・ ・
		50ms	・ ・
		60ms	・ ・
45 度	0 度	5ms	・ ・


[図16]

角度差 (Φ)	T	閾値
0 度	5ms	-12.5
	10ms	-15.8
	20ms	-22.5
	30ms	-30.5
	40ms	-38.2
	50ms	-45.1
	60ms	-53.0
45 度	5ms	・ ・
	10ms	・ ・
	20ms	・ ・
	30ms	・ ・
	40ms	・ ・
	50ms	・ ・
	60ms	・ ・
		
315 度	5ms	・ ・
	10ms	・ ・
	20ms	・ ・
	30ms	・ ・
	40ms	・ ・
	50ms	・ ・
	60ms	・ ・


[図17]

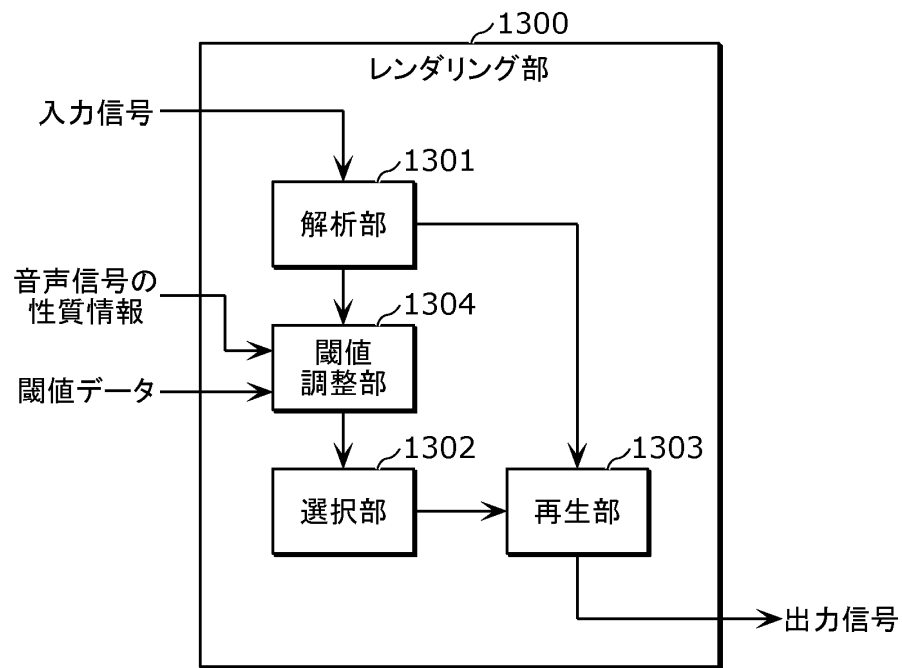


[図18]

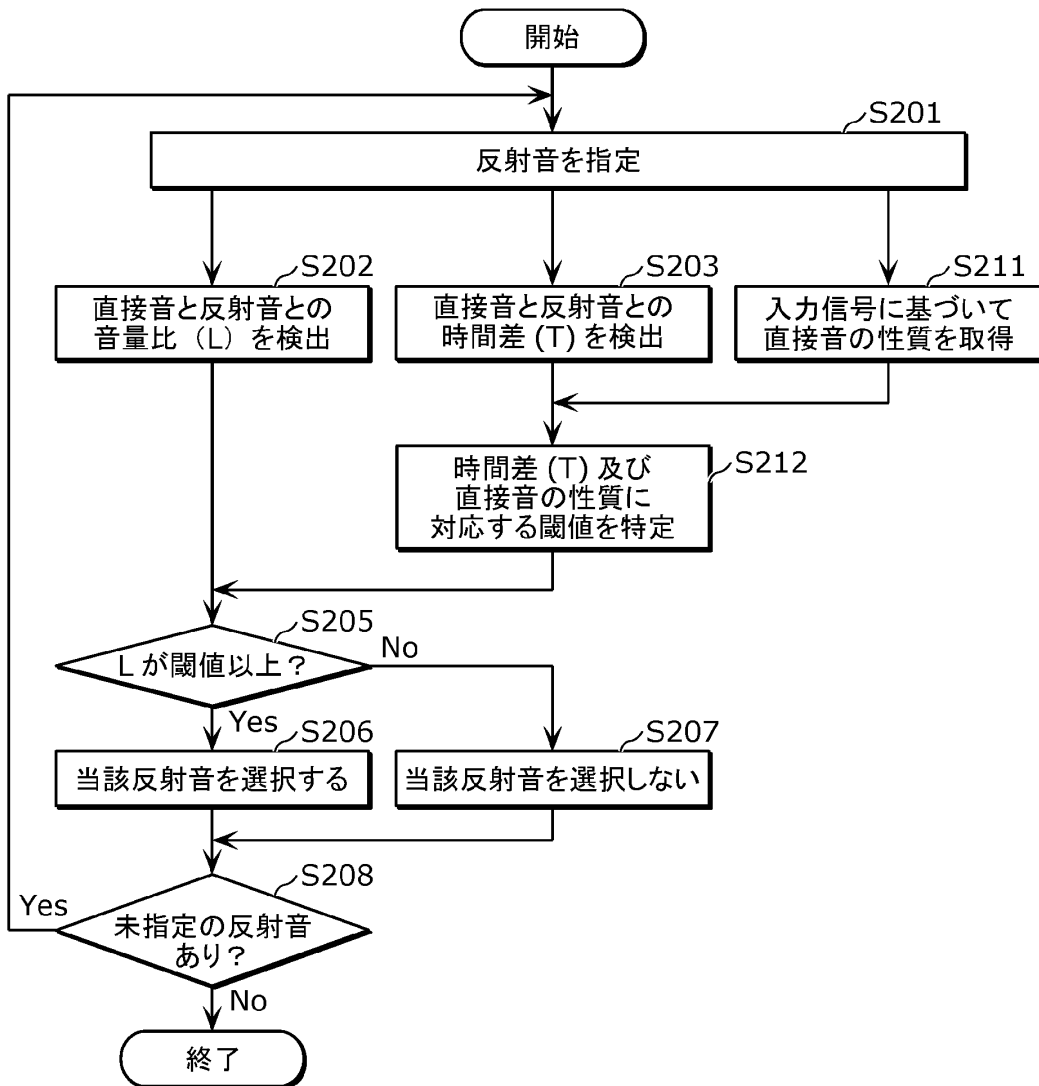


[図19]

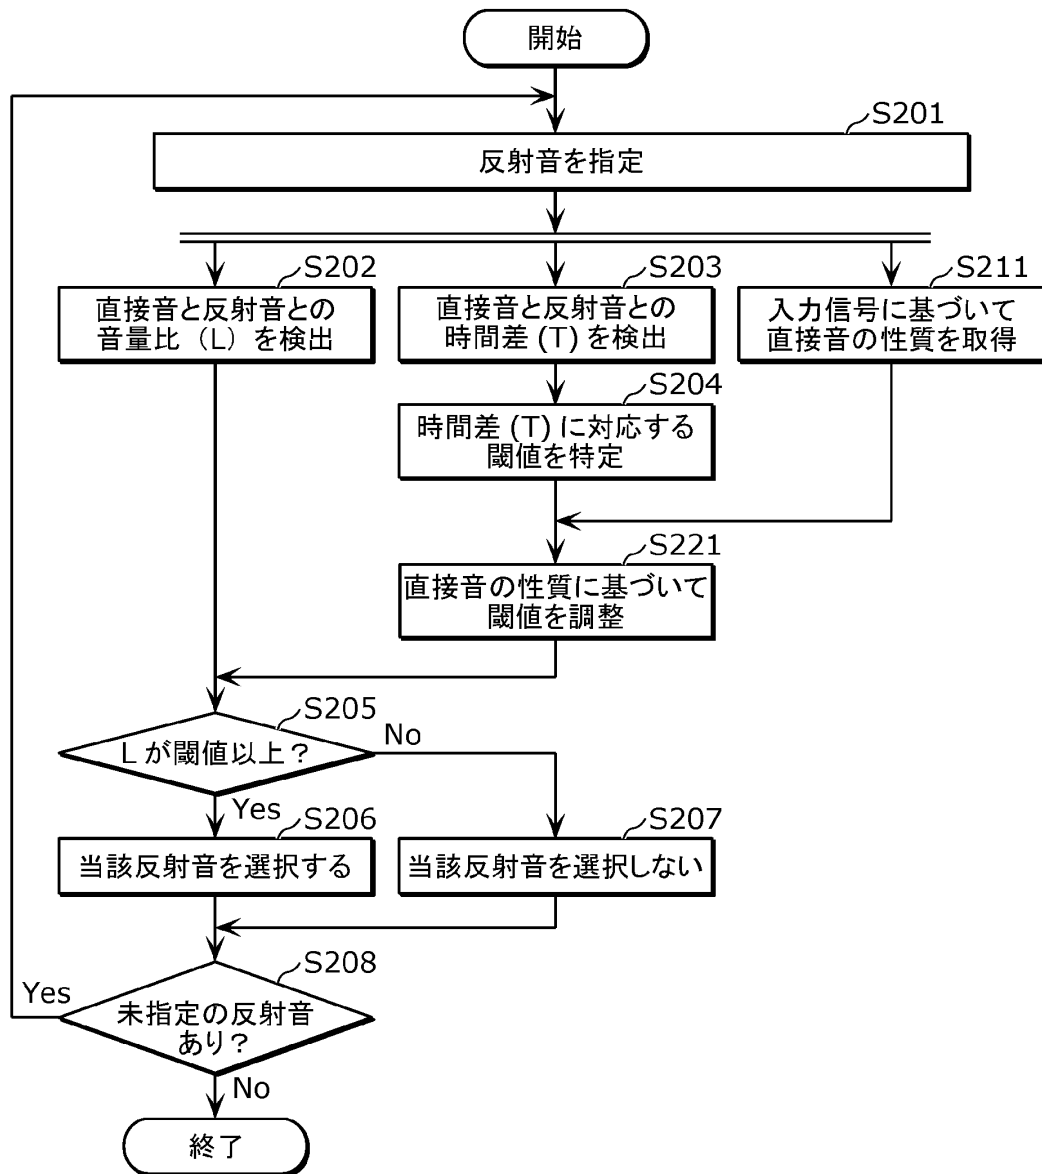


[図20]

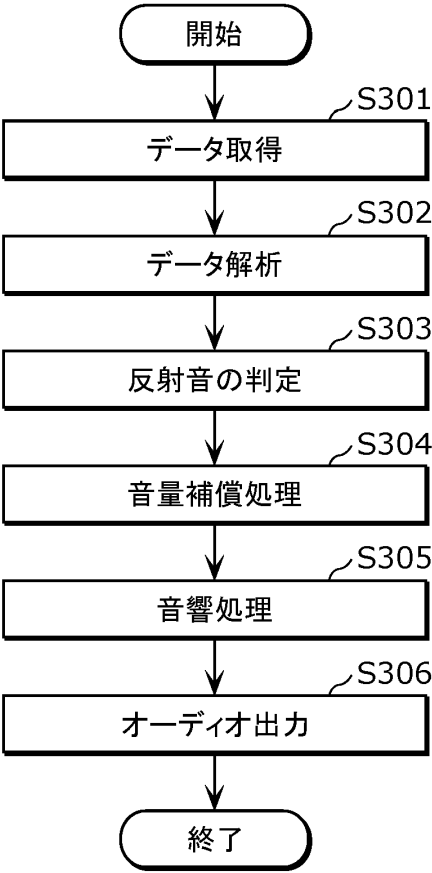


[図21]

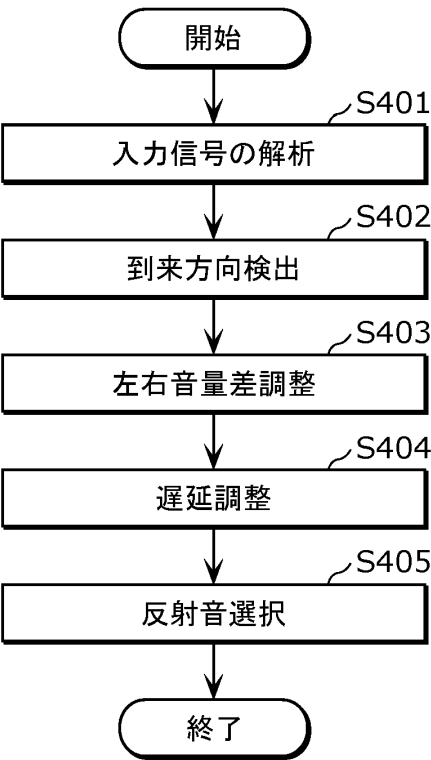


[図22]

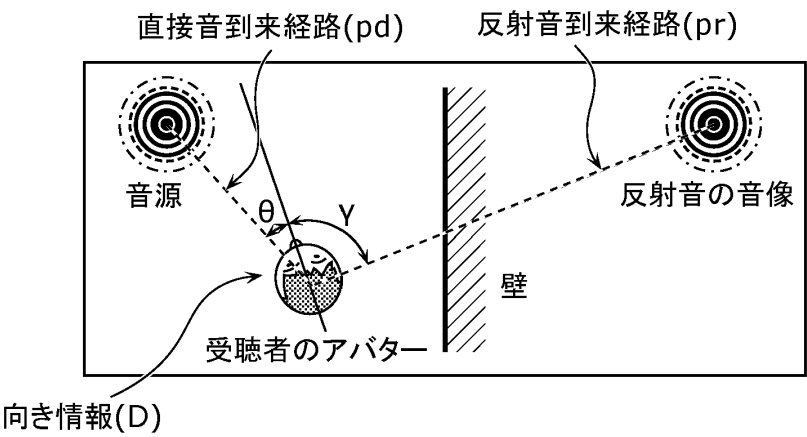


[図23]

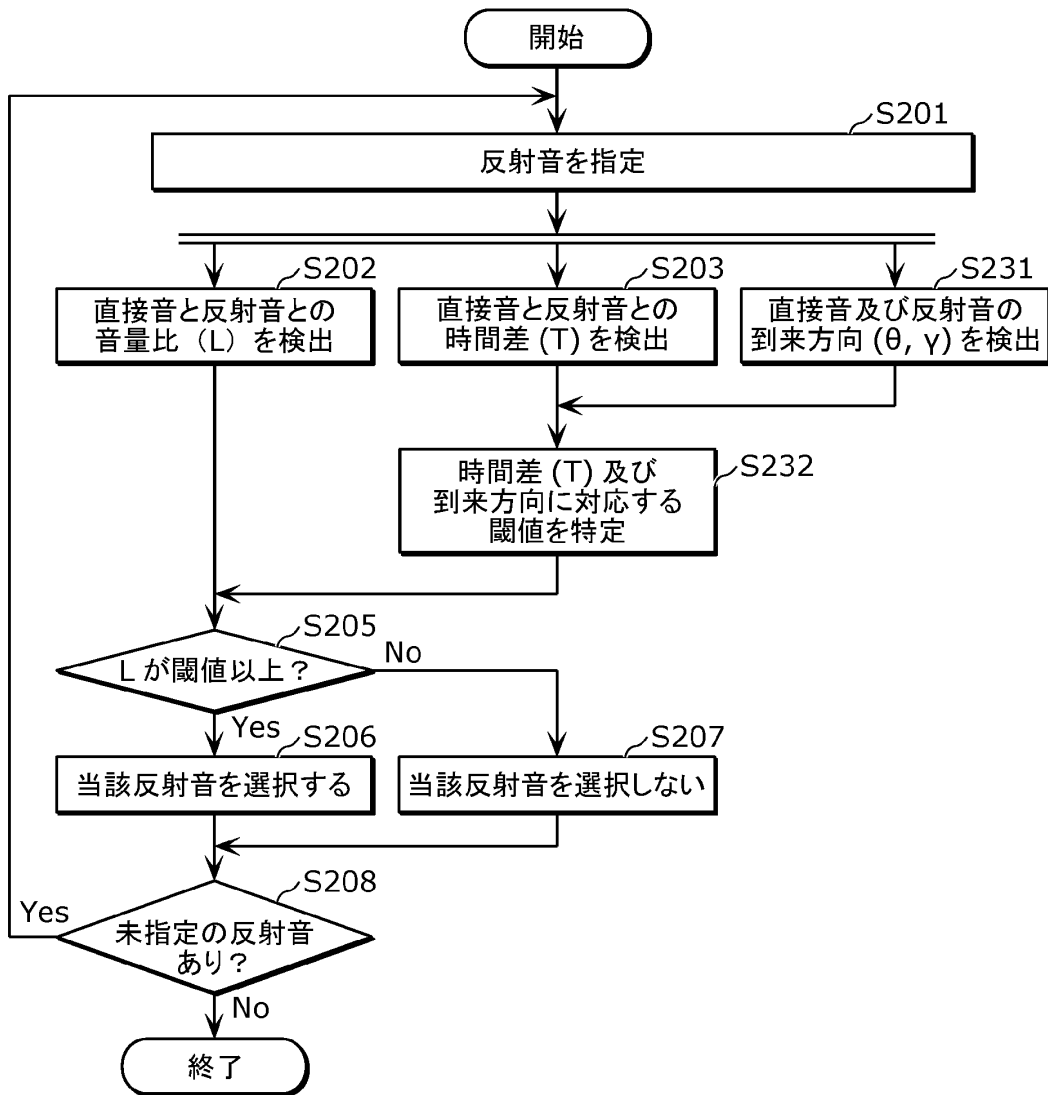


[図24]

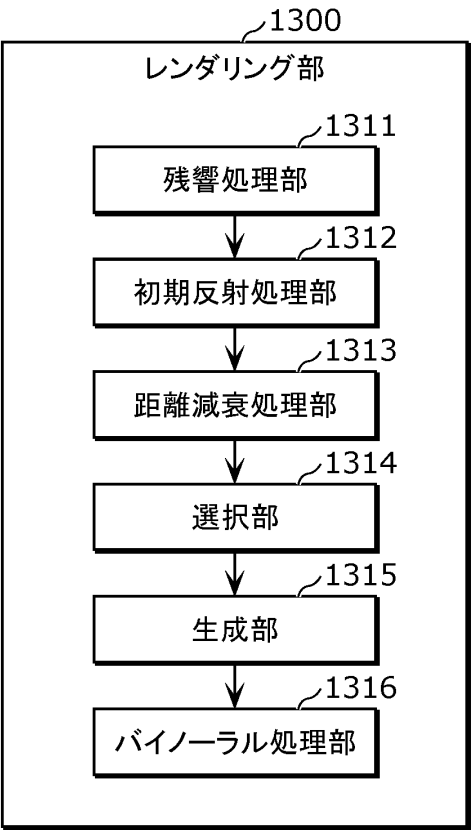


[図25]

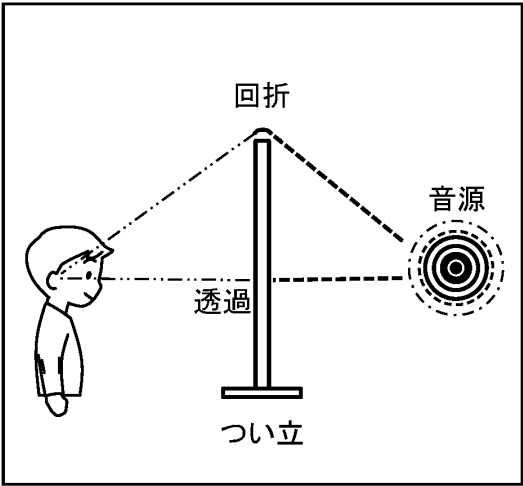


[図26]

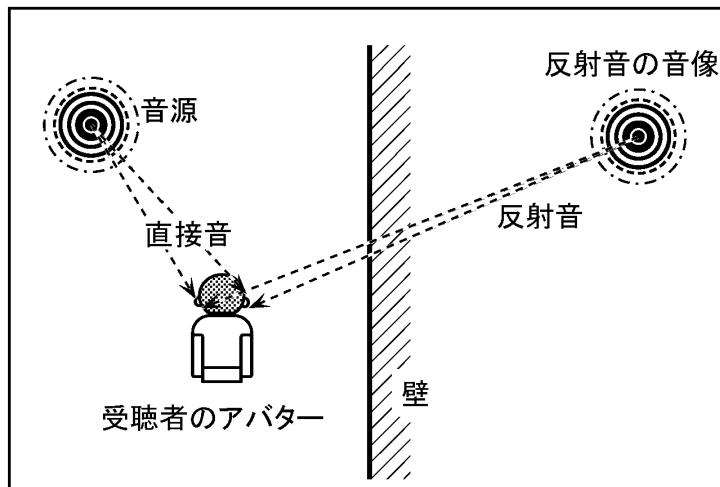


[図27]

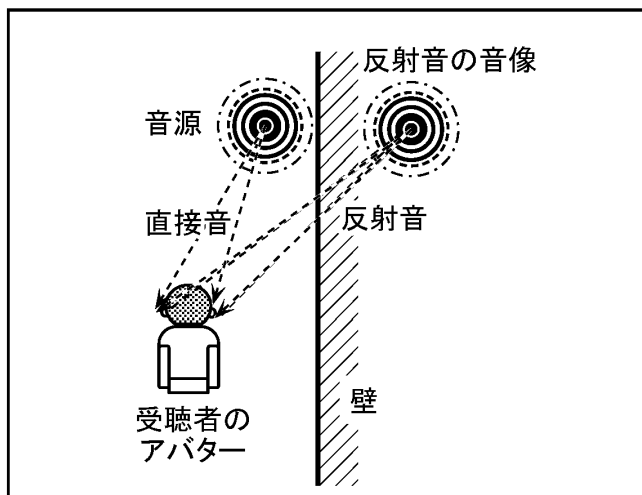


[図28]

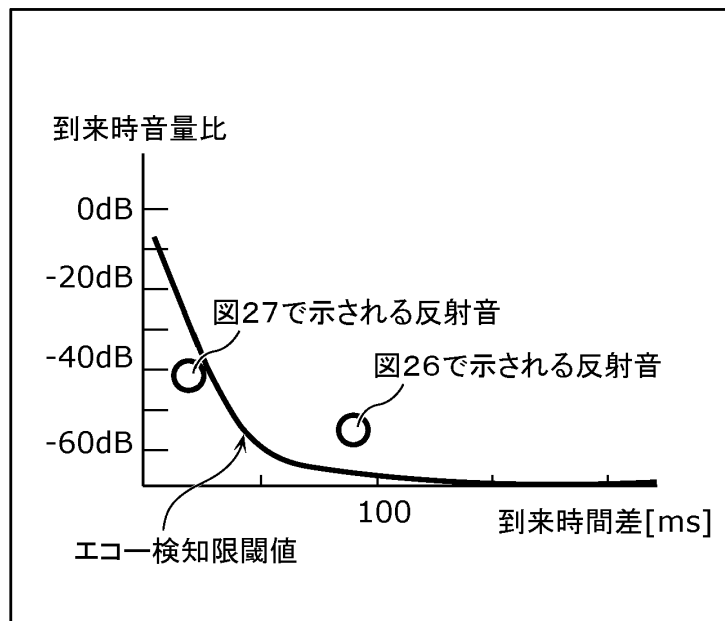


[図29]

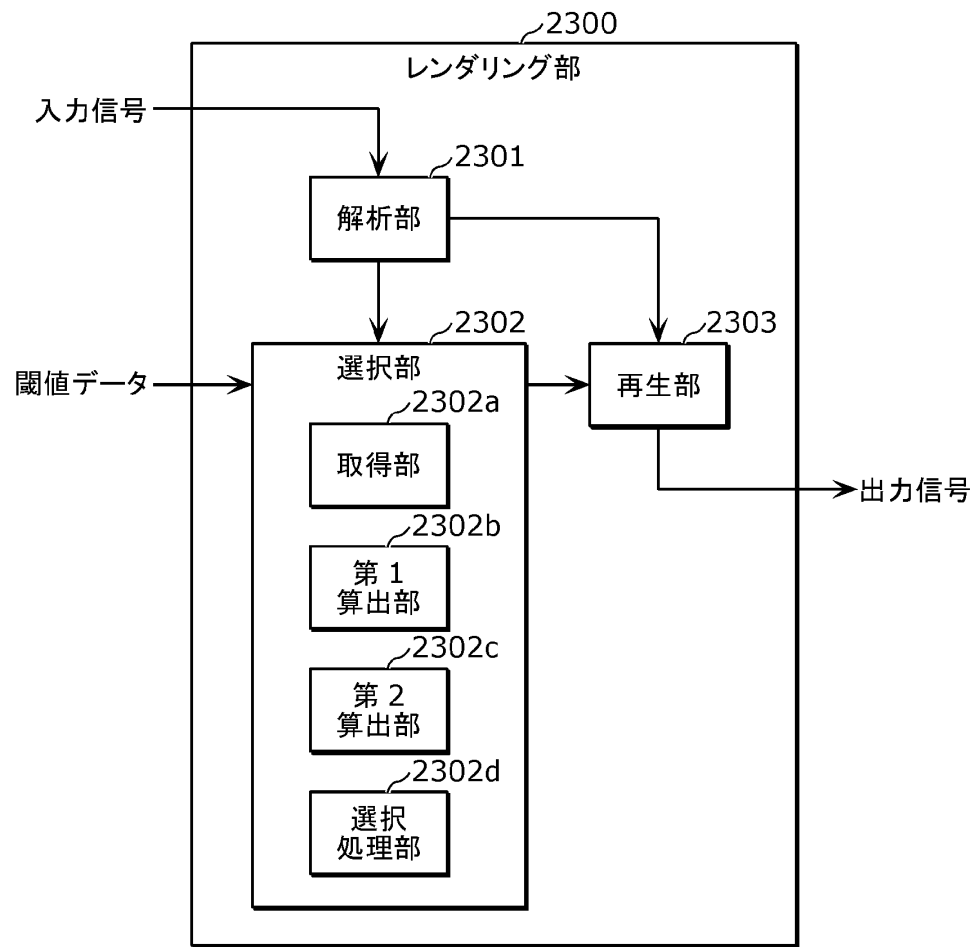

[図30]

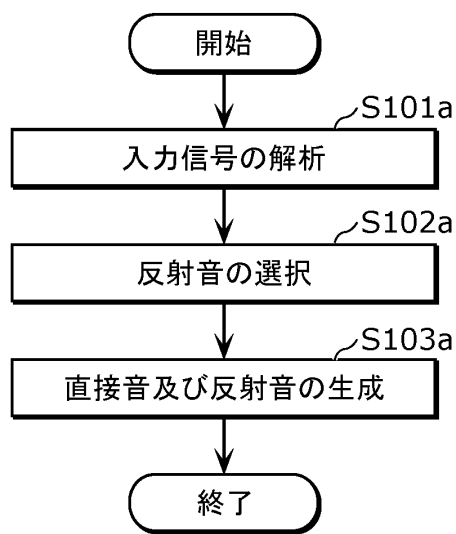


[図31]

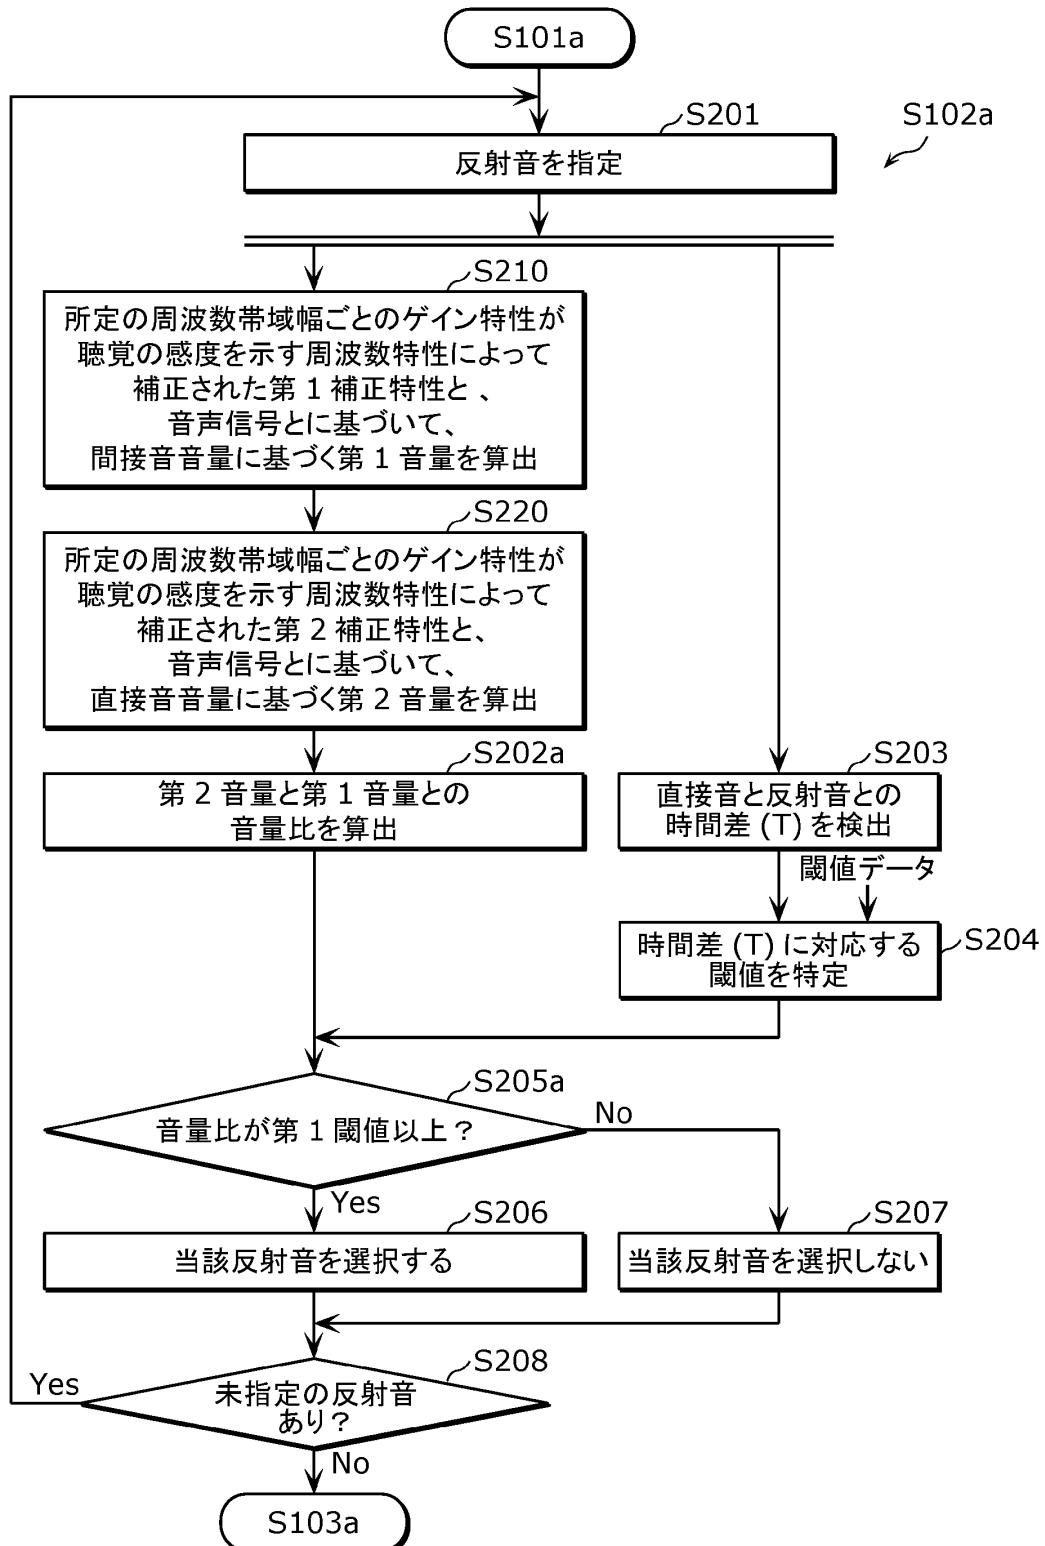

[図32]

- 表面が固く凹凸の多い壁面
- 表面が固く凹凸の少ない壁面
- △ 表面が柔軟な壁面

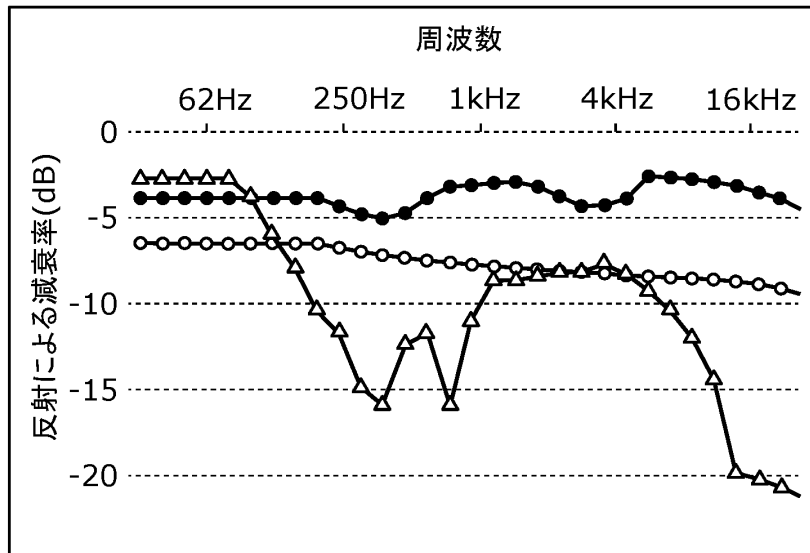

WO 2025/075147


PCT/JP2024/035621

[図33A]


周波数 (Hz)	A- 特性
20	0.00299
25	0.00582
31.5	0.01072
40	0.01862
50	0.03090
63	0.04898
80	0.07499
100	0.11092
125	0.15668
160	0.21380
200	0.28510
250	0.37154
315	0.46774
400	0.57544
500	0.69183
630	0.80353
800	0.91201
1000	1.00000
1250	1.07152
1600	1.12202
2000	1.14815
2500	1.16145
3150	1.14815
4000	1.12202
5000	1.05925
6300	0.98855
8000	0.88105
10000	0.74989
12500	0.60954
16000	0.46774
20000	0.34277

[図33B]


□ A特性

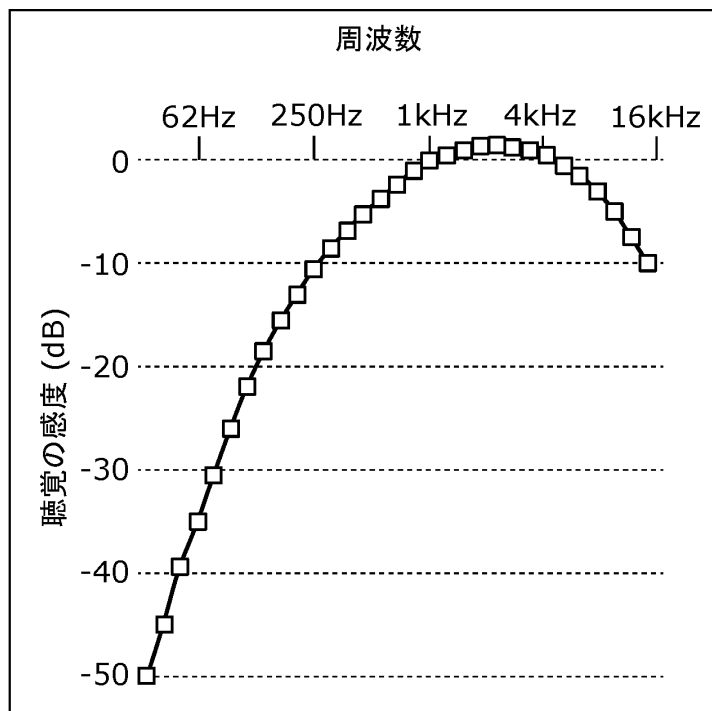


[図34]

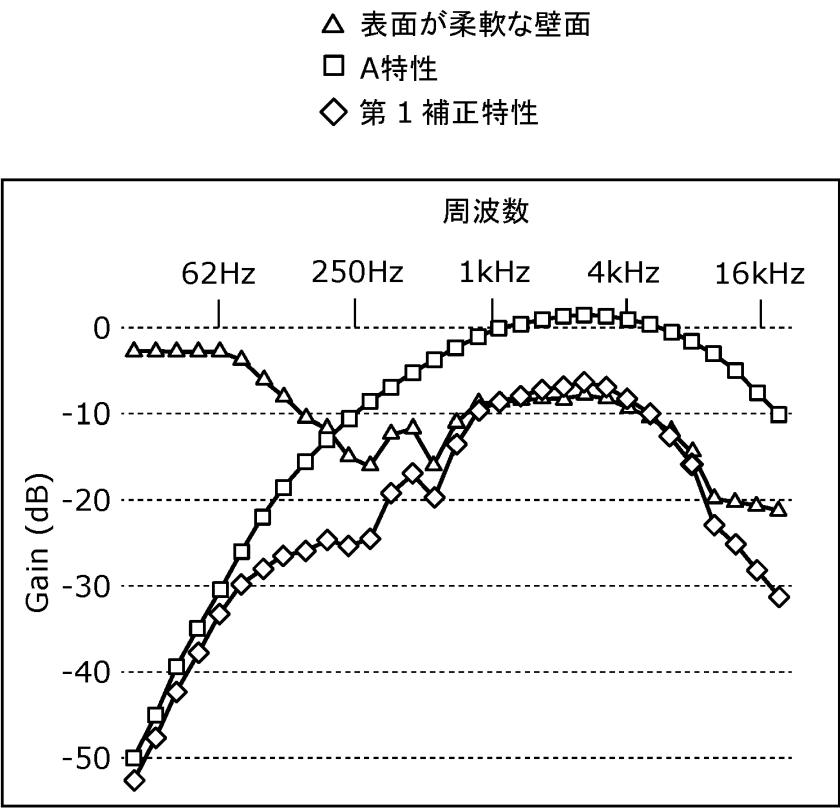


[図35]

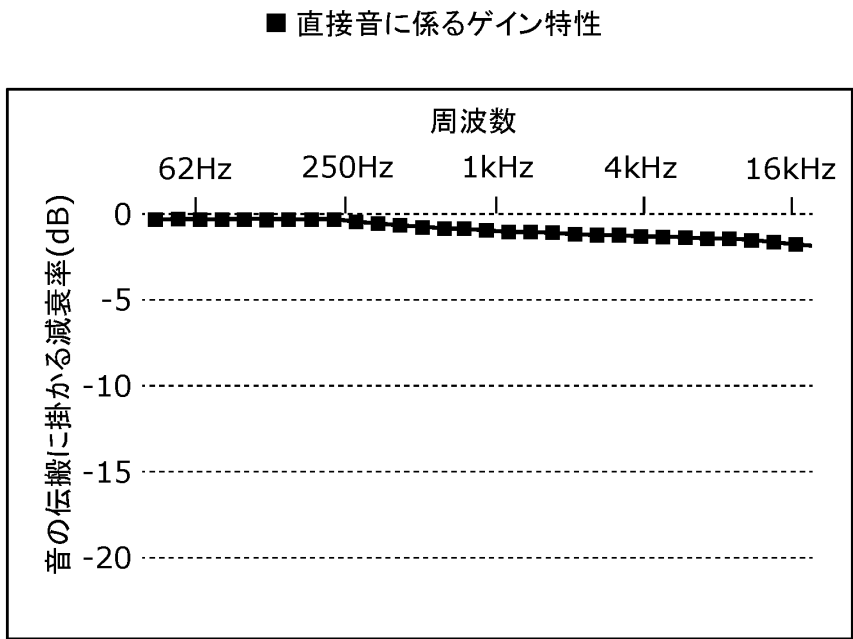


[図36]

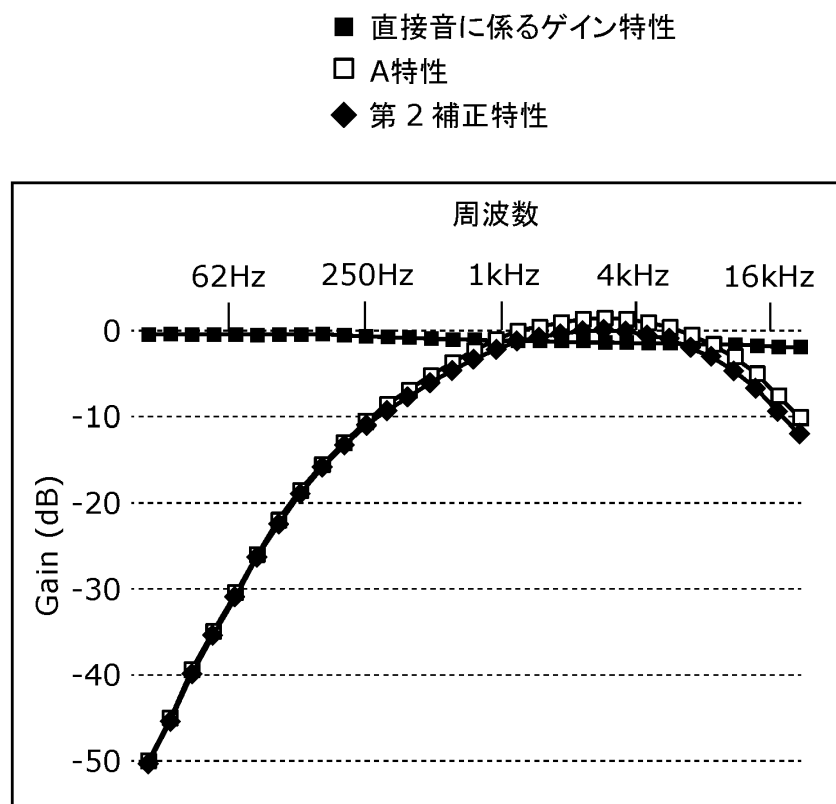


[図37]

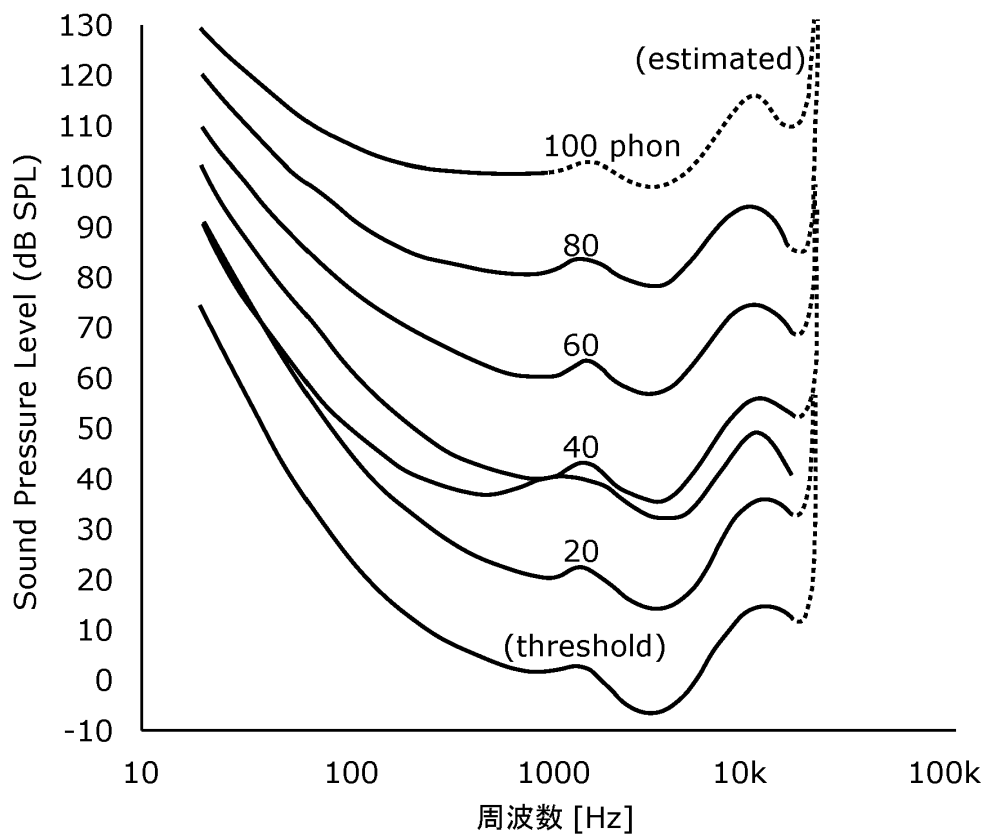


[図38]

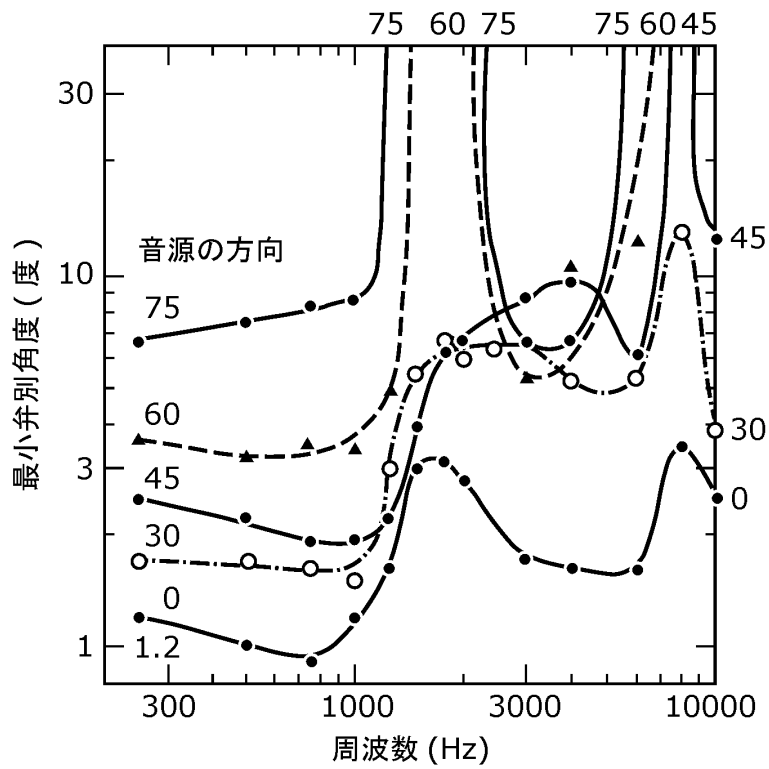


[図39]

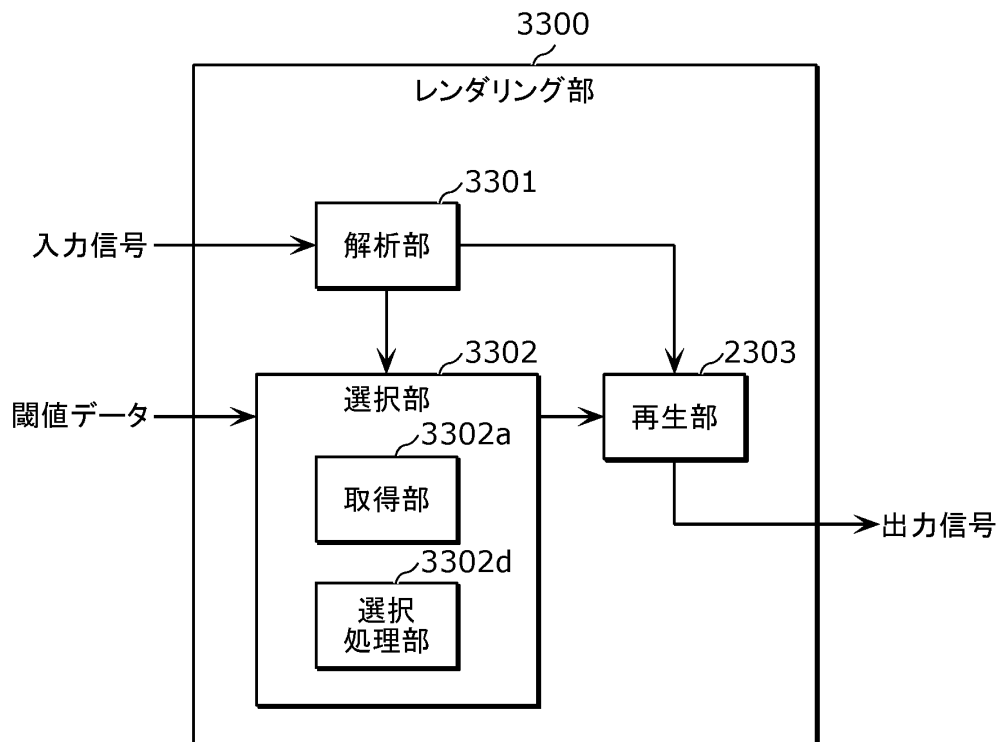


[図40]

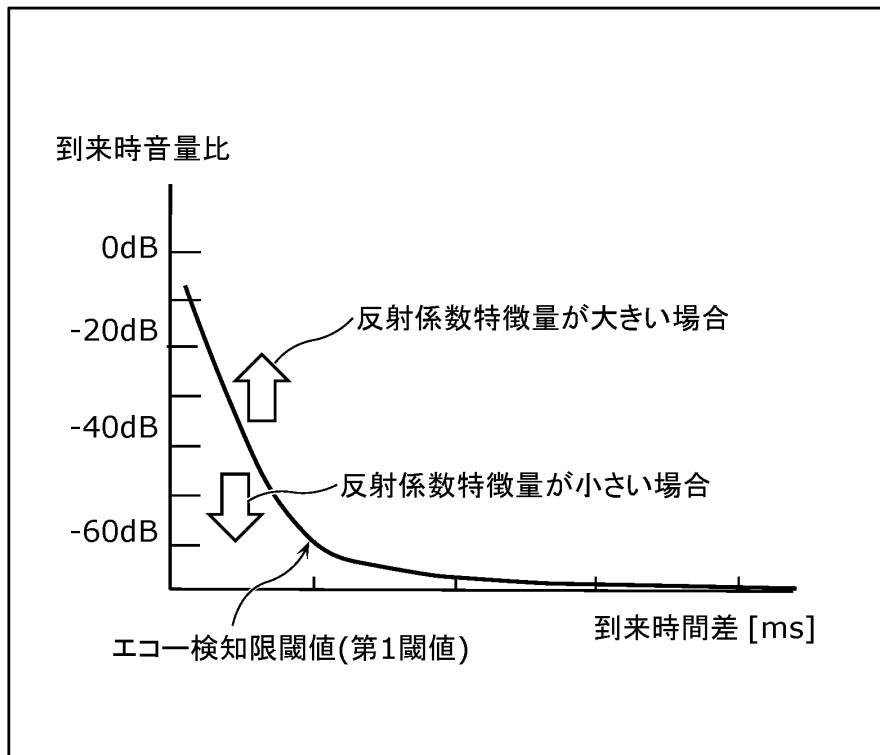


[図41]

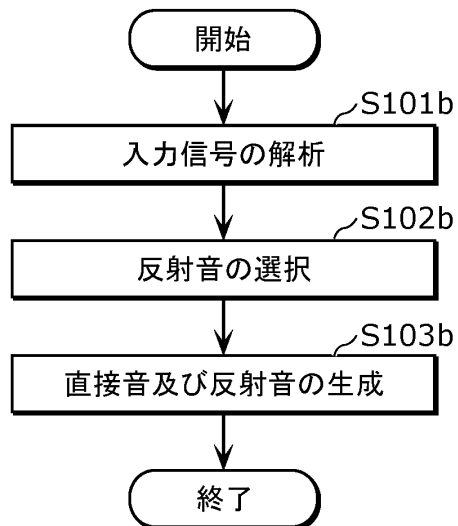


[図42]

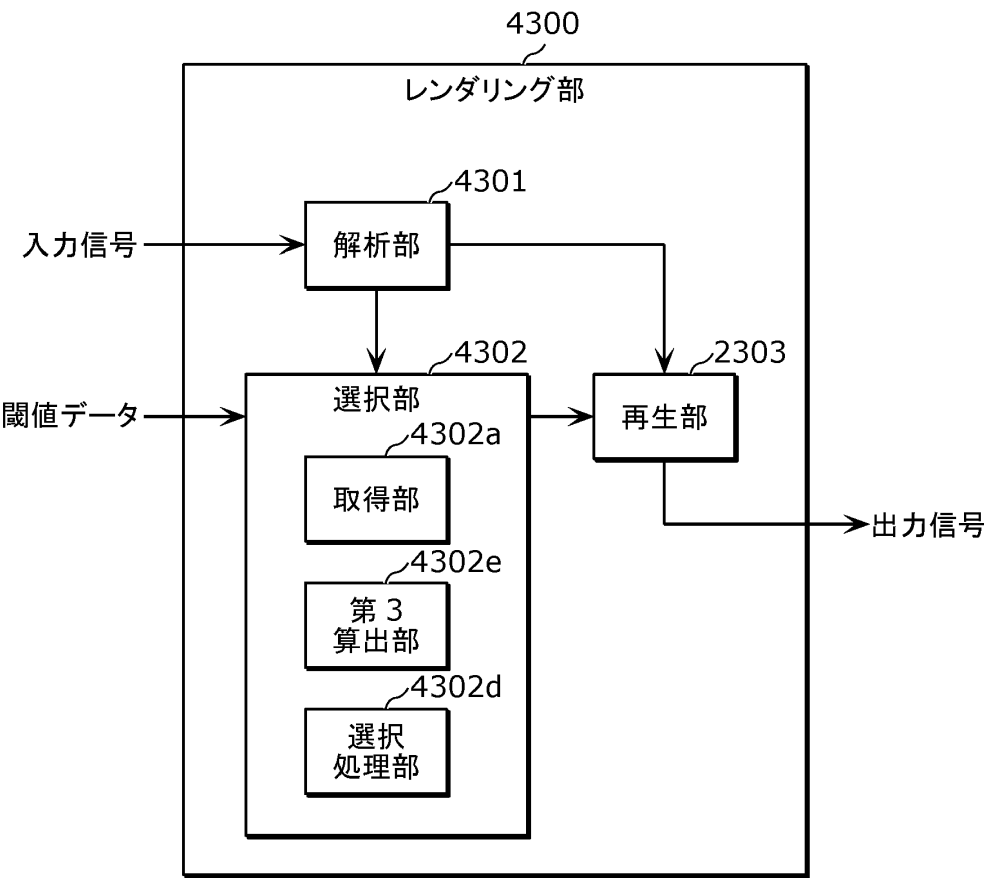

[図43]

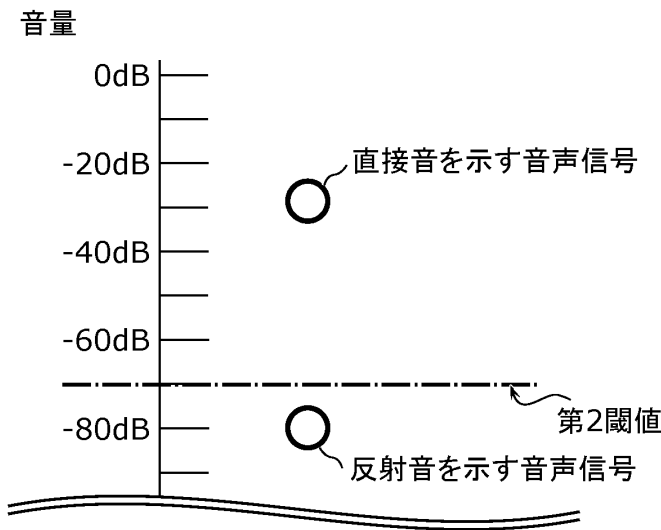

[図44]

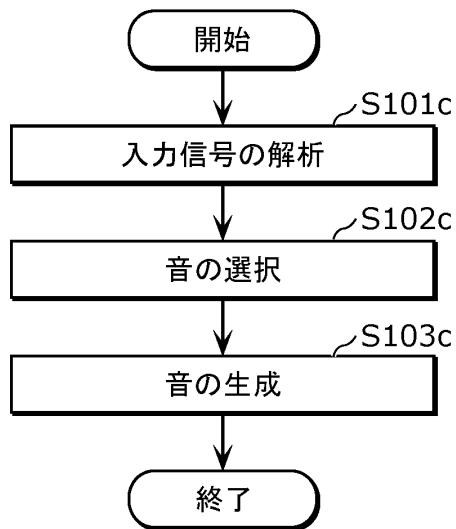

[図45]

