

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 December 2000 (28.12.2000)

PCT

(10) International Publication Number
WO 00/79563 A1

(51) International Patent Classification⁷: **H01J 29/76**

(FR). CARETTE, Christian [FR/FR]; 6, rue de Binges, F-21560 Rémilly-sur-Tille (FR).

(21) International Application Number: **PCT/IB00/01015**

(22) International Filing Date: **14 June 2000 (14.06.2000)**

(74) Agent: **MOJAL, Gérard**; Thomson multimedia, 46, quai Alphonse Le Gallo, F-92648 Boulogne Cedex (FR).

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
99/07710 18 June 1999 (18.06.1999) **FR**

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(71) Applicant (*for all designated States except US*): **THOMSON TUBES & DISPLAYS S.A.** [FR/FR]; 46, quai Alphonse Le Gallo, F-92100 Boulogne-Billancourt (FR).


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **FOURRIER, Pascal** [FR/FR]; 26, avenue Boulloche, F-39100 Dole

[Continued on next page]

(54) Title: **DEFLECTION DEVICE FOR CATHODE RAY TUBE**

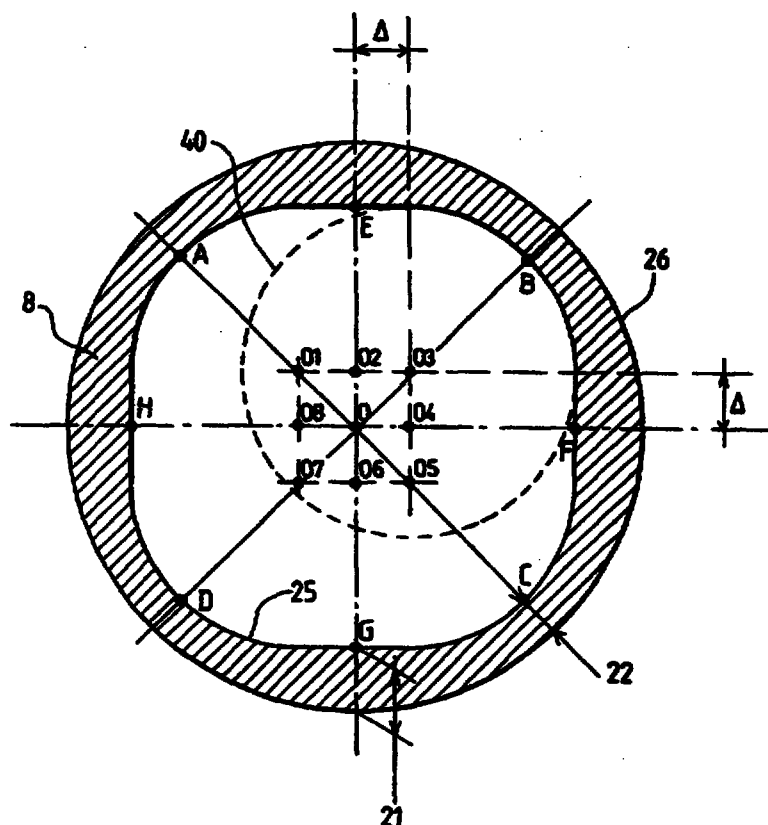

(57) Abstract: The deflection system of a cathode ray tube comprises a separator made of plastic whose substantially cylindrical rear part (8) possesses a zone whose transverse cross section is of variable value, with a minimum value at least two points (A, B, C, D). This characteristic makes it possible to reduce the final external diameter (26) of the cylindrical part (8) so as to increase the sensitivity of auxiliary coils disposed on this cylindrical part.

WO 00/79563 A1

