

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
26 May 2005 (26.05.2005)

PCT

(10) International Publication Number
WO 2005/046973 A1

(51) International Patent Classification⁷: **B29C 63/06**,
F16L 55/165

(21) International Application Number:
PCT/US2004/036621

(22) International Filing Date:
3 November 2004 (03.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/704,487 7 November 2003 (07.11.2003) US

(71) Applicant (for CA only): **INSITUFORM (NETHER-
LANDS) B.V.** [NL/NL]; West Blaak 6, 3rd Floor, NL-3012
KK Rotterdam (NL).

(71) Applicant (for DE, GB, IE only): **INSITUFORM HOLD-
INGS (UK) LIMITED** [GB/GB]; Nnit 6, Roundwood In-
dustrial Estate, Osset, West Yorkshire WFS 9SQ (GB).

(71) Applicant (for all designated States except CA, DE, GB,
IE, US): **INA ACQUISITION CORP.** [US/US]; Suite
1410, Nemours Building, 1007 Orange Street, Wilming-
ton, DE 19801 (US).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **DRIVER, Franklin,
Thomas** [US/US]; 113 Rathfarnum Drive, St. Charles, MO
63304 (US). **WANG, Weiping** [US/US]; 1027 Oakwood
Farms Lane, Ballwin, MO 63021 (US).

(74) Agent: **WOLFSON, Michael, I.**; Reed Smith, LLP, 29th
Floor, 599 Lexington Avenue, New York, NY 10022-7650
(US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,

[Continued on next page]

(54) Title: LONGITUDINALLY REINFORCED CURED IN PLACE LINER

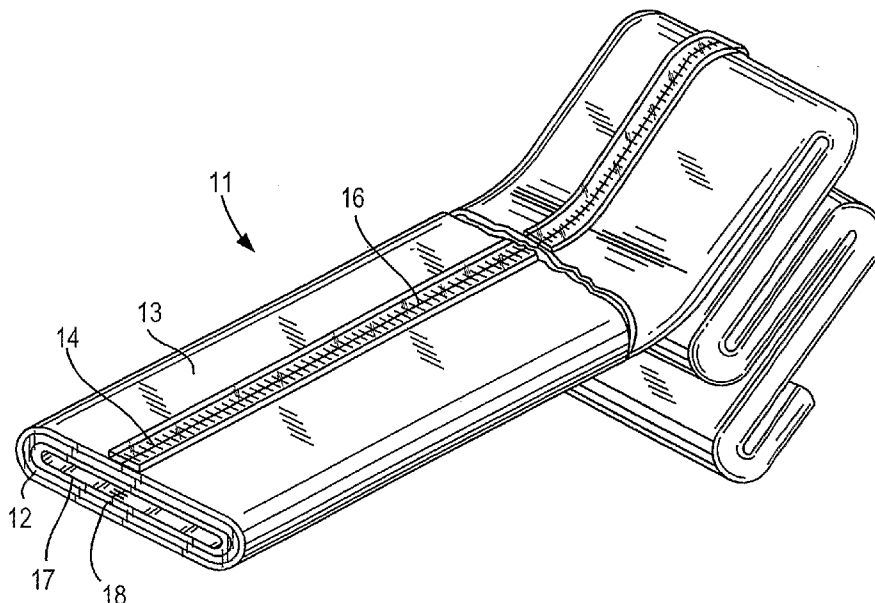

(57) Abstract: A longitudinally reinforced resin impregnated cured in place liner (21) with a reinforcing scrim (33) to limit longitudinal stretch is provided. A continuous length of resin impregnable tube is provided in lay flat condition and impregnated and a scrim (33) having greater strength in the warp direction than in the weft direction is placed on a portion of the bottom of the tube that is then feed into a tubular former where an impermeable film (31) is formed into a tube sealed and continuously everted about the inner tubular member and scrim travelling in an opposite direction so that the everted wrapping envelopes the tubular member. The reinforced tube may have an integral inner impermeable layer that is installed in an existing pipeline by the pull-in-and inflate method.

WO 2005/046973 A1



TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

Published:

— *with international search report*
— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.