

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



INTERNATIONAL PATENT COOPERATION TREATY (PCT)

(43) International Publication Date
5 April 2001 (05.04.2001)

PCT

(10) International Publication Number
WO 01/23184 A1

(51) International Patent Classification: B32B 31/30,
35/00, 27/12

(CH). OSTAPARCHENKO, George; 7 Golf Green Lane,
Salem, SC 29676 (US).

(21) International Application Number: PCT/US00/26510

(74) Agent: JOUNG, J., Kenneth; E.I. du Pont de Nemours
and Company, Legal Patent Records Center, 1007 Market
Street, Wilmington, DE 19898 (US).

(22) International Filing Date:

27 September 2000 (27.09.2000)

(81) Designated States (national): CA, JP, KR, MX, SG,

(25) Filing Language:

English

(84) Designated States (regional): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE).

(26) Publication Language:

English

(30) Priority Data:

60/156,167 27 September 1999 (27.09.1999) US

Published:

— With international search report.


— Before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments.

(71) Applicant: E.I. DU PONT DE NEMOURS AND COM-
PANY [US/US]; 1007 Market Street, Wilmington, DE
19898 (US).

(72) Inventors: ALBERTONE, Yannick; 2, chemin du
Pavillon, P.O. Box 50, CH-1218 Le Grand Saconnex

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: EXTRUSION COATING PROCESS

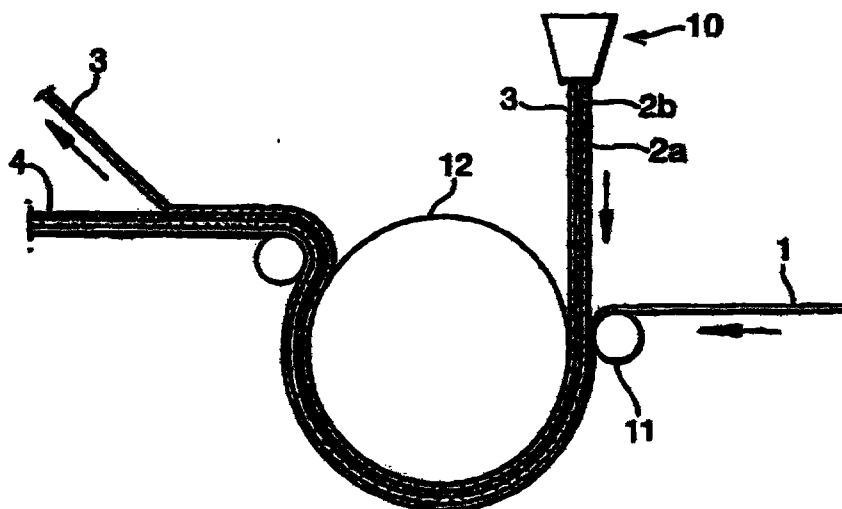

(57) Abstract: A process for the preparation of a laminate, particularly a waterproof moisture vapor permeable laminate, comprising a substrate having on a surface thereof a thermoplastic polymer resin coating and further comprising a peelable release layer in contact with the surface of said thermoplastic polymer resin remote from the substrate, and optionally further comprising a tie layer between the substrate and the thermoplastic polymer resin, said process comprising the steps of forming or providing a substrate layer and providing on a surface thereof a thermoplastic polymer resin coating and a peelable release layer and optionally providing a tie layer between the substrate and the thermoplastic polymer resin coating, characterized in that the thermoplastic polymer resin has a viscosity less than about 3000 Pa.s measured according to the standard ISO11443.

WO 01/23184 A1