

Polymers as support material for use in fused filament fabrication

Description

- 5 The present invention relates to the use of a polymer as a support material in a fused filament fabrication process and to a process for producing three-dimensional objects by a fused filament fabrication process.

A task often encountered in very recent times is the rapid production of prototypes.

- 10 Rapid prototyping or rapid manufacturing processes are processes for fabrication designed to transpose existing three-dimensional computer-aided design data (CAD), ideally without a manual diversion of forming directly and rapidly into work pieces.

For rapid prototyping different processes are known which can be subdivided into

- 15 laser-based processes and processes without the use of a laser.

Stereolithography is a laser-based process wherein a curable liquid composition is cured with a laser layer by layer. As curable liquid composition for example monomers or monomer mixtures are used. The polymerization of said monomers is induced by

- 20 means of an UV-laser.

A similar process is the selective laser sintering (SLS) process. In this process the laser selectively fuses powdered material, for example a thermoplastic polymer powder, by scanning cross-sections generated from a 3-D digital description of the part (for example from a CAD file or scan data) on the surface of a powder bed. After each cross-section is scanned, the powder bed is lowered by one layer thickness, a new layer of powder material is applied on top, and the process is repeated until the part is completed.

- 25 (for example from a CAD file or scan data) on the surface of a powder bed. After each cross-section is scanned, the powder bed is lowered by one layer thickness, a new layer of powder material is applied on top, and the process is repeated until the part is completed.
- 30 The aforementioned laser-based processes are costly as the use of high power lasers (for example, a carbon dioxide laser) is involved.

More economical is the fused filament fabrication process (FFF) also known as fused deposit modeling (FDM). The fused filament fabrication process is an additive manufacturing technology. A three-dimensional object is produced by extruding a thermoplastic material through a nozzle to form layers as the thermoplastic material hardens after extrusion. A plastic filament is unwound from a coil and supplies thermoplastic material to the extrusion nozzle which can be turned on or off to control the flow. There is typically a worm-drive that pushes the filament into the nozzle at a controlled rate. The nozzle is heated to heat the thermoplastic material past its melting and/or glass transition temperature and is then deposited by the extrusion head on a

35 manufacturing technology. A three-dimensional object is produced by extruding a thermoplastic material through a nozzle to form layers as the thermoplastic material hardens after extrusion. A plastic filament is unwound from a coil and supplies thermoplastic material to the extrusion nozzle which can be turned on or off to control the flow. There is typically a worm-drive that pushes the filament into the nozzle at a controlled rate. The nozzle is heated to heat the thermoplastic material past its melting and/or glass transition temperature and is then deposited by the extrusion head on a

40 controlled rate. The nozzle is heated to heat the thermoplastic material past its melting and/or glass transition temperature and is then deposited by the extrusion head on a

2

base to form a three-dimensional object in a layer-wise fashion. The thermoplastic material is typically selected and its temperature is controlled so that it solidifies substantially immediately upon extrusion or dispensing onto the base, with the buildup of multiple layers to form the desired three-dimensional object. The thermoplastic material is also denominated as modeling material.

In order to form each layer, drive motors are provided to move the base and/or the extrusion nozzle (dispensing head) relative to each other in a predetermined pattern along the X-, Y- and Z-axis. The FFF process was first described in US 5,121,329.

10

For the production of three-dimensional objects having complex shapes, for example overhangs or narrow cavities, typically a support material must be used underneath overhanging parts or in cavities of the three-dimensional object under construction, which are not directly supported by the modeling material itself. The support material is typically dispensed by a separate extrusion nozzle. The support material is chosen so that it adheres to the modeling material. After finishing the FFF process the support material has to be removed in order to obtain the three-dimensional object manufactured from the modeling material.

The support material should ideally have a high glass transition temperature similar to the glass transition temperature of the modeling material and should be easily removable from the three-dimensional object after manufacturing. Moreover, the support material should be compatible with the modeling material. The FFF process is normally carried out in a build chamber. For certain FFF processes the utilized build chamber can have raised temperatures to improve the quality of the print process. The temperature in the build chamber is typically in the range of 20 to 80 °C and normally in the range of 60 to 80 °C. The support material should preferably have a glass transition temperature (T_g) above the temperature in the build chamber. The support material should not deform at the temperature of the build chamber.

30

US 6,790,403 B1 describes a FFF process for making a three-dimensional object by dispensing a solidifiable modeling material in a predetermined pattern in order to define the three-dimensional object in coordination with dispensing a solidifiable support material so as to define the support structure for the three-dimensional object. According to US 6,790,403 B1 as a modeling material preferably an acrylonitrile-butadiene-styrene (ABS) composition is used. The support material is preferably a thermoplastic polymer comprising a base polymer containing carboxylic acid and a plasticizer. The modeling material is alkali-soluble and can be removed by placing the object in a strong alkaline bath.

40

WO 2010/045147 also describes a FFF process, wherein a support material is used. The support material is a copolymer comprising carboxyl groups and phenyl groups as

well as a polymeric impact modifier. The support material is removed from the three-dimensional object with a strong alkaline aqueous solution.

5 US 5,503,785 describes a FFF process wherein between the modeling material and the support material a thin film of a release material is deposited in order to minimize the interfacial bond strength between the modeling material and the support material. In one embodiment as modeling and support material the same polymers are used. As a release material water soluble polymers are used, for example polyethylene oxide and glycol-based polymers; polyvinyl pyrrolidone-based polymers; methyl vinyl ether,
10 and maleic acid-based polymers; polyoxazoline-based polymers; and polyquaterniums. As a modeling material a thermoplastic polyamide polymer is utilized. The FFF process according to US 5,503,785 is rather complicated as three different materials have to be used, namely the modeling material, the release material and the support material.

15 WO 2012/143182 describes a support material for a FFF process based on a copolymer comprising maleic anhydride and a further appropriate monomer like styrene or isobutylene. Subsequently the support material is removed from the three-dimensional object by means of an alkaline aqueous solution.

20 The handling of alkaline solutions is not trivial, and presents a large hurdle for the implementation of such support materials in FFF processes. The support materials described in the prior art do not at one and the same time meet the above stated requirements of a high glass transition temperature, good compatibility with the modeling material and easy removability.


25 The object underlying the present disclosure is therefore to provide improved support materials for a fused filament fabrication (FFF) process, which does not have the abovementioned disadvantages of the prior art or has them only to a significantly reduced extent. A second object underlying the present disclosure is to provide a fused
30 filament fabrication (FFF) process, which process should be carried out more simply, safer and more cost efficient than described in the state of the art.

In an aspect, there is provided the use of a polymer comprising polymerized units (A) and (B):

35

(A) at least one first monomer of the formula (I):

3a

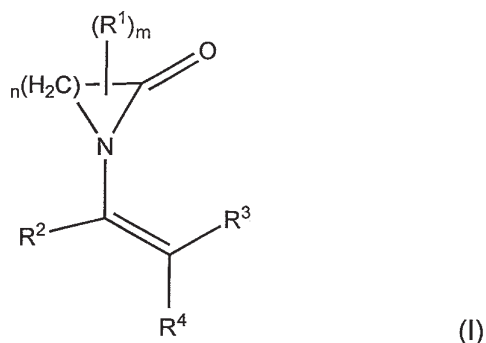

where

n is 3 to 12;


m is 0 to 3;

5 R¹ is C₁-C₁₀-alkyl, C₂-C₁₀-alkenyl, aryl or aralkyl;

R², R³ and R⁴ are each, independently of one another, hydrogen, C₁-C₁₀-alkyl, C₂-C₁₀-alkenyl, aryl or aralkyl; and

(B) at least one second monomer of the formula (II)

10



where

R⁵, R⁶ and R⁷ are each, independently of one another, hydrogen, C₁-C₁₀-alkyl, C₂-C₁₀-alkenyl, aryl or aralkyl;

15 R⁸ is C₁-C₂₀-alkyl, C₂-C₁₀-alkenyl, aryl or aralkyl;


as a support material in a fused filament fabrication process.

20 In another aspect, there is provided a process for producing a three-dimensional object by a fused filament fabrication process comprising the steps:

- i) depositing a support material into a build chamber using a layer-based additive technique to form a support structure,
- 25 ii) depositing a modeling material into the build chamber using the layer-based additive technique to form the three-dimensional object, wherein the three-dimensional object comprises at least one region supported by the support structure and
- iii) removing the support structure from the three-dimensional object with an aqueous solution,

wherein the support material comprises a polymer comprising polymerized units (A) and (B):

5 (A) at least one first monomer of the formula (I):

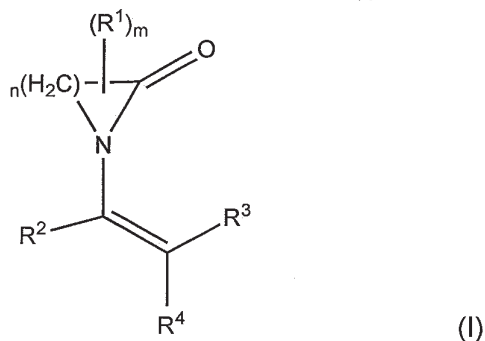


where

10 n is 3 to 12;
 m is 0 to 3;
 R^1 is C_1 - C_{10} -alkyl, C_2 - C_{10} -alkenyl, aryl or aralkyl;
 R^2 , R^3 and R^4 are each, independently of one another, hydrogen, C_1 - C_{10} -alkyl, C_2 - C_{10} -alkenyl, aryl or aralkyl; and

(B) at least one second monomer of the formula (II)

15




where

20 R^5 , R^6 and R^7 are each, independently of one another, hydrogen, C_1 - C_{10} -alkyl, C_2 - C_{10} -alkenyl, aryl or aralkyl;
 R^8 is C_1 - C_{20} -alkyl, C_2 - C_{10} -alkenyl, aryl or aralkyl.

The object is achieved by the use of a polymer comprising polymerized units (A) and (B):

25 (A) at least one first monomer of the formula (I):

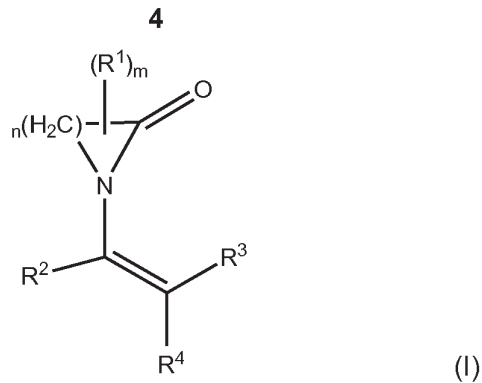

where

n is 3 to 12;


m is 0 to 3;

5 R¹ is C₁–C₁₀–alkyl, C₂–C₁₀–alkenyl, aryl or aralkyl;

R², R³ and R⁴ are each, independently of one another, hydrogen, C₁–C₁₀–alkyl, C₂–C₁₀–alkenyl, aryl or aralkyl; and

(B) at least one second monomer of the formula (II)

10



where

R⁵, R⁶ and R⁷ are each, independently of one another, hydrogen, C₁–C₁₀–alkyl, C₂–C₁₀–alkenyl, aryl or aralkyl;

15 R⁸ is C₁–C₂₀–alkyl, C₂–C₁₀–alkenyl, aryl or aralkyl;

as a support material in a fused filament fabrication process.

20 The support material used in a FFF process according to the present invention meets at one and the same time the requirements of a high glass transition temperature similar to that of the modeling material, a good compatibility with the modeling material and a superior removability subsequent to the production of the three-dimensional object made from the modeling material.

25 The term “modeling material” according to the present invention describes the material out of which the three-dimensional object itself is manufactured by the FFF process.

The term “support material” according to the present invention describes the material which forms a support structure for overhangs or narrow cavities and the like of the 30 three-dimensional object made from the modeling material during the FFF process.

5

The support material is subsequently removed to obtain the finished three-dimensional object itself made from the modeling material. In other words the support material is used as a sacrificial material which is removed after the FFF process.

- 5 The support material used according to the present invention shows a good compatibility with the modeling material and with the FFF process. The support material, moreover, is soluble in water and does not require a strong alkaline aqueous solution for removal.
- 10 The FFF process for the production of three-dimensional objects is well known in the state of the art and detailed explained in the above cited documents. The FFF process is also denominated as 3D printing process.


An FFF-process (fused filament fabrication process) for the purpose of the present invention is a process in which at least one modeling material and at least one support material are each initially present in a solid state and thereafter melted and printed to form an three-dimensional object comprising the modeling material, which is supported by the support material. Subsequently the support material is removed by dissolving to obtain the three-dimensional object itself.

20

Another object of the present invention is therefore a process for producing a three-dimensional object by a fused filament fabrication process comprising the steps:

- i) depositing a support material into a build chamber using a layer-based additive technique to form a support structure,
- 25 ii) depositing a modeling material into the build chamber using the layer-based additive technique to form the three-dimensional object, wherein the three-dimensional object comprises at least one region supported by the support structure and
- 30 iii) removing the support structure from the three-dimensional object with an aqueous solution,
- wherein the support material comprises a polymer comprising polymerized units (A) and (B):

- 35 (A) at least one first monomer of the formula (I):

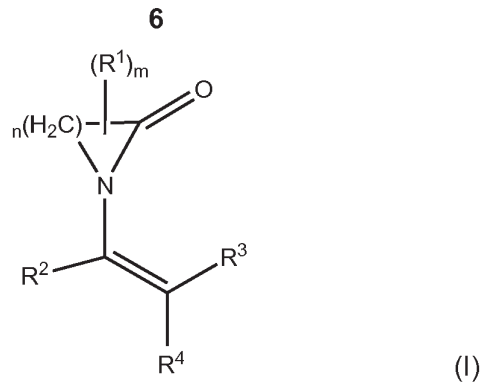

where


n is 3 to 12;

m is 0 to 3;

5 R¹ is C₁-C₁₀-alkyl, C₂-C₁₀-alkenyl, aryl or aralkyl;

R², R³ and R⁴ are each, independently of one another, hydrogen, C₁-C₁₀-alkyl, C₂-C₁₀-alkenyl, aryl or aralkyl; and

(B) at least one second monomer of the formula (II)



where

R⁵, R⁶ and R⁷ are each, independently of one another, hydrogen, C₁-C₁₀-alkyl, C₂-C₁₀-alkenyl, aryl or aralkyl;

15 R⁸ is C₁–C₂₀-alkyl, C₂–C₁₀-alkenyl, aryl or aralkyl.

The “layer-based additive technique” for the purpose of the present invention is a technique, wherein a first layer of material is deposited on a base in a build chamber to form a first layer of material, followed by the deposition of a second layer of material on the first layer of material, followed by the deposition of a third layer of material and so on. The number of layers deposited by the layer-base additive technique depends on the size of the three-dimensional object and the support structure respectively. Moreover, the number of layers depends on the thickness of the layers deposited.

25 Modeling material

As modeling material generally thermoplastic materials comprising a thermoplastic polymer are used. Accordingly any thermoplastic material capable of being extruded may be used.

Suitable modeling materials are well known and detailed explained in the above cited documents. Suitable modeling materials according to the invention have generally glass transition Temperatures in the range of 20 to 350°C, preferably in the range of 30 to 250°C, more preferably in the range of 40 to 200°C and particularly in the range of 5 50 to 200°C.

Glass transition temperatures for the purpose of the invention are measured by differential scanning calorimetry (DSC) according to DIN 53765.

10 Suitable modeling materials are for example thermoplastic polymers selected from the group consisting of polyolefines like polyethylene or polypropylene, acrylonitrile-butadiene-styrene (ABS) copolymers, polycarbonates, polyamides, polylactic acids and blends of the aforementioned polymers.

15 *Support material*

According to the invention a support material is used which comprises a polymer comprising polymerized units (A) and (B).

20 Within the context of the present invention, definitions such as C₁-C₁₀-alkyl, as for example defined above for the radicals R¹, R² and R³ in formula (I) and R⁵, R⁶, R⁷ and R⁸ in formula (II), mean that this substituent (radical) is an alkyl radical with a carbon atom number from 1 to 10. The alkyl radical may be linear or branched and also optionally cyclic. Alkyl radicals which have both a cyclic component and also a linear
25 component likewise fall under this definition.

Within the context of the present invention, definitions such as C₁-C₂₀-alkyl, as for example defined above for the radical R⁸ in formula (II), mean that this substituent (radical) is an alkyl radical with a carbon atom number from 1 to 20. The alkyl radical
30 may be linear or branched and also optionally cyclic. Alkyl radicals which have both a cyclic component and also a linear component likewise fall under this definition.

The alkyl radicals can optionally also be mono- or polysubstituted with functional groups such as amino, amido, ether, vinyl ether, isoprenyl, hydroxy, mercapto,
35 carboxyl, halogen, aryl or heteroaryl. Unless stated otherwise, the alkyl radicals preferably have no functional groups as substituents. Examples of alkyl radicals are methyl, ethyl, n-propyl, sec-propyl, n-butyl, sec-butyl, isobutyl, 2-ethylhexyl, tertiary-butyl (tert-bu/t-Bu), pentyl, hexyl, heptyl, cyclohexyl, octyl, nonyl, decyl, undecyl, dodecyl, tridecyl, tetradecyl, pentadecyl, hexadecyl, heptadecyl, octadecyl, nonadecyl
40 or eicosanyl.

8

Within the context of the present invention, definitions such as C₂-C₁₀-alkenyl, as for example defined above for the radicals R¹, R² and R³ in formula (I) and R⁵, R⁶, R⁷ and R⁸ in formula (II), mean that this substituent (radical) is an alkenyl radical with a carbon atom number from 2 to 10. This carbon radical is preferably monounsaturated, but it can optionally also be di- or polyunsaturated. As regards linearity, branches, cyclic fractions and optionally present substituents, the analogous details as defined above with reference to the C₁-C₁₀-alkyl radicals are applicable. Preferably, within the context of the present invention, C₂-C₁₀-alkenyl is vinyl, 1-allyl, 3-allyl, 2-allyl, cis- or trans-2-butenyl or ω-butenyl.

10

Within the context of the present invention, the term "aryl", as for example defined above for the radicals R¹, R² and R³ in formula (I) and R⁵, R⁶, R⁷ and R⁸ in formula (II), means that the substituent (radical) is an aromatic. The aromatic may be a monocyclic, bicyclic or optionally polycyclic aromatic. In the case of polycyclic aromatics, individual cycles can optionally be completely or partially saturated. Preferred examples of aryl are phenyl, naphthyl or anthracyl, in particular phenyl. The aryl radical can also optionally be mono- or polysubstituted with functional groups, as defined above for C₁-C₁₀-alkyl.

15

Within the context of the present invention, the term aralkyl, as for example defined above for the radicals R¹, R² and R³ in formula (I) and R⁵, R⁶, R⁷ and R⁸ in formula (II), means that an alkyl radical (alkylene) is in turn substituted with an aryl radical. The alkyl radical may be for example a C₁-C₁₀-alkyl radical as per the above definitions.

20

In the above formula (I), the radical R¹ may be present once (m=1) or multiple times (m=2 or 3). The radical R¹ here can replace one or more hydrogen atoms on any desired carbon atoms of the cyclic lactam – corresponding to its frequency. If two or more radicals R¹ are present, these can be attached to the same carbon atom or to different carbon atoms. For m=0, the corresponding cyclic lactam is unsubstituted.

25

30

The support material is presented in more detail below.

In a preferred embodiment the support material comprises at least 90% by weight, more preferably at least 95% by weight and particularly at least 99% by weight of a polymer comprising polymerized units (A), (B) and optionally (C). In a particularly preferred embodiment the support material consists of a polymer comprising polymerized units (A), (B) and optionally (C).

35

In another preferred embodiment, the support material comprises a blend of a polymer comprising polymerized units (A), (B) and optionally (C) and of at least one homopolymer. The support material then comprises at least 50% by weight, preferably at last 60% by weight and particularly preferably at least 70% by weight of a polymer

40

9


comprising polymerized units (A), (B) and optionally (C) and at most 50% by weight, preferably at most 40% by weight and particularly at most 30% by weight of at least one homopolymer.

- 5 “At least one homopolymer” within the context of the present invention means precisely one homopolymer and also a mixture of two or more homopolymers.

Any at least one homopolymer that can be extruded and blended with the polymer comprising polymerized units (A), (B) and optionally (C) is suitable. Preferably, the at
 10 least one homopolymer is selected from the group consisting of a homopolymer of component (A), the first monomer and a homopolymer of component (B), the second monomer. For the component (A) and the component (B), the embodiments and preferences described hereinafter hold true.

- 15 Another object of the present invention is therefore the use of a polymer comprising polymerized units (A) and (B):

(A) at least one first monomer of the formula (I):



(I)

where


n is 3 to 12;

m is 0 to 3;

R¹ is C₁-C₁₀-alkyl, C₂-C₁₀-alkenyl, aryl or aralkyl;

- 25 R², R³ and R⁴ are each, independently of one another, hydrogen, C₁-C₁₀-alkyl, C₂-C₁₀-alkenyl, aryl or aralkyl; and

(B) at least one second monomer of the formula (II)



(II)

30

10

where

R^5 , R^6 and R^7 are each, independently of one another, hydrogen, C_1 - C_{10} -alkyl, C_2 - C_{10} -alkenyl, aryl or aralkyl;

R^8 is C_1 - C_{20} -alkyl, C_2 - C_{10} -alkenyl, aryl or aralkyl;

5

and at least one homopolymer as support material in a fused filament fabrication process.

Component (A) / first monomer

10

The terms „first monomer“ and „component (A)“ for the purpose of the present invention are synonymous and are used interchangeably throughout the present invention.

15 In a preferred embodiment component (A) is at least one monomer of the formula (I) where n is 3 to 5.

In another preferred embodiment component (A) is at least one monomer of the formula (I) where m is 0.

20

In another preferred embodiment component (A) is at least one monomer of the formula (I) where R^2 , R^3 and R^4 are each hydrogen.

25 In a more preferred embodiment component (A) is at least one monomer selected from the group consisting of N-vinylpyrrolidone (N-vinyl-2-pyrrolidone), N-vinylpiperidone (N-vinyl-2-piperidone) and N-vinylcaprolactame.

Another object of the present invention is therefore the use of a polymer as a support material in a fused filament fabrication process, wherein the polymerized unit (A)

30 comprises at least one monomer selected from the group consisting of N-vinylpyrrolidone, N-vinylpiperidone and N-vinylcaprolactame.

In a particular preferred embodiment component (A) is at least one monomer selected from the group consisting of N-vinylpyrrolidone and N-vinylcaprolactame.

35

In another preferred embodiment component (A) comprises at least 80% by weight, preferably at least 90% by weight, of N-vinylpyrrolidone and 0 to 20% by weight, preferably 0 to 10% by weight, of at least one monomer of the formula (I) which is different from N-vinylpyrrolidone, based on the total weight of component (A).

40

Another object of the present invention is therefore the use of a polymer as a support material in a fused filament fabrication process, wherein the polymerized unit (A)

comprises at least 80% by weight of N-vinylpyrrolidone and 0 to 20% by weight of at least one monomer of the formula (I) which is different from N-vinylpyrrolidone, based on the total weight of component (A).

- 5 In a particular embodiment component (A) comprises at least 80% by weight, preferably at least 90% by weight, of N-vinylpyrrolidone and 0 to 20% by weight, preferably 0 to 10% by weight, of N-vinylcaprolactam, based on the total weight of component (A).
- 10 Another object of the present invention is therefore the use of a polymer as a support material in a fused filament fabrication process, wherein the polymerized unit (A) comprises at least 80% by weight of N-vinylpyrrolidone and 0 to 20% by weight of N-vinylcaprolactam, based on the total weight of component (A).
- 15 Suitable weight ranges for the at least one monomer of the formula (I) which is different from N-vinylpyrrolidone are 1 to 20% by weight, preferably 1 to 10% by weight, based on the total weight of component (A).

Suitable weight ranges for N-vinylcaprolactam are 1 to 20% by weight, preferably 1 to

- 20 10% by weight, based on the total weight of component (A).

In a preferred embodiment component (A) consists of N-vinylpyrrolidone.

Component (B) / second monomer

- 25 The terms „second monomer“ and „component (B)“ for the purpose of the present invention are synonymous and are used interchangeably throughout the present invention.

- 30 In a preferred embodiment component (B) is at least one monomer of the formula (II) where R^5 , R^6 and R^7 are each hydrogen.

In another preferred embodiment component (B) is at least one monomer of the formula (II) where R^8 is C_1 - C_{20} -alkyl.

- 35 In another preferred embodiment component (B) is at least one monomer of the formula (II) where R^5 , R^6 and R^7 are each hydrogen and R^8 is C_1 - C_{20} -alkyl.

- In another preferred embodiment component (B) comprises at least 80% by weight, preferably at least 90% by weight, of vinyl acetate and 0 to 20% by weight, preferably 0 to 10% by weight, of at least one monomer of the formula (II) which is different from N-vinyl acetate, based on the total weight of component (B).
- 40

Another object of the present invention is therefore the use of a polymer as a support material in a fused filament fabrication process, wherein the polymerized unit (B) comprises at least 80% by weight of vinyl acetate and 0 to 20% by weight of at least
5 one monomer of the formula (II) which is different from N-vinyl acetate, based on the total weight of component (B).

In a particular embodiment component (B) comprises at least 80% by weight, preferably at least 90% by weight, of vinyl acetate and 0 to 20% by weight, preferably 0
10 to 10% by weight, of at least one monovinyl ester of a C₄ to C₂₀ monocarboxylic acid, based on the total weight of component (B).

Another object of the present invention is therefore the use of a polymer as a support material in a fused filament fabrication process, wherein the polymerized unit (B)
15 comprises at least 80% by weight of vinyl acetate and 0 to 20% by weight of at least one monovinyl ester of a C₄ to C₂₀ monocarboxylic acid, based on the total weight of component (B).

Suitable weight ranges for the at least one monomer of the formula (II) which is
20 different from vinyl acetate are 1 to 20% by weight, preferably 1 to 10% by weight, based on the total weight of component (B).

Suitable weight ranges for the at least one monovinyl ester of a C₄ to C₂₀ monocarboxylic acid are 1 to 20% by weight, preferably 1 to 10% by weight, based on
25 the total weight of component (B). Preferred are monovinyl esters of a C₅ to C₁₅, more preferable C₈ to C₁₂ and in particular C₉ to C₁₀ monocarboxylic acids.

In a preferred embodiment component (B) consists of vinyl acetate.

30 The polymer which is used as a support material preferably comprises at least 20% by weight of the polymerized unit (A), based on the total weight of the polymer (which is used as a support material).

Therefore, another object of the present invention is the use of a polymer comprising
35 polymerized units (A) and (B) as a support material in a fused filament fabrication process, wherein the polymer comprises at least 20% by weight of the polymerized unit (A), based on the total weight of the polymer.

Another object of the present invention is therefore the use of a polymer as a support
40 material in a fused filament fabrication process, wherein the polymer comprises at least 20% by weight of the polymerized unit (A), based on the total weight of the polymer.

13

In another preferred embodiment the polymer which is used as support material preferably comprises 20 to 80% by weight of the polymerized unit (A) and 80 to 20% by weight of the polymerized unit (B), based on the total weight of the polymer (which is used as a support material).

5

Therefore, another object of the present invention is the use of a polymer comprising polymerized units (A) and (B) as a support material in a fused filament fabrication process, wherein the polymer comprises 20 to 80% by weight of the polymerized unit (A) and 80 to 20% by weight of the polymerized unit (B), based on the total weight of the polymer.

Another object of the present invention is therefore the use of a polymer as a support material in a fused filament fabrication process, wherein the polymer comprises 20 to 80% by weight of the polymerized unit (A) and 80 to 20% by weight of the polymerized unit (B), based on the total weight of the polymer.

The polymer which is used as a support material can optionally contain a polymerized unit (C).

In a preferred embodiment the polymer which is used as support material preferably comprises 20 to 80% by weight of polymerized N-vinylpyrrolidone (unit (A)) and 80 to 20% by weight of polymerized vinyl acetate (unit (B)) and 0 to 40% by weight, preferably 0 to 20% by weight more preferably 0 to 10% by weight of a polymerized unit (C), based on the total weight of the polymer (which is used as a support material).

25

In case a polymerized unit (C) is present the lower limit is at least 0,1% by weight, preferable at least 1% by weight and more preferable at least 5% by weight, based on the total weight of the polymer (which is used as a support material).

The total weight of the polymerized units (A), (B) and optionally (C) generally sum up to 100% by weight.

The polymerized unit (C) is preferably at least one third monomer selected from the group consisting of acrylic acids, and substituted acrylic acids, and salts, esters and amides thereof, where the substituents on the carbon atoms are in the two or three position of the acrylic acid, and independently of one another are chosen from the group consisting of C₁-C₂₀-alkyl, -CN, COOH, particularly preferably methacrylic acid, ethacrylic acid, acrylamide, methacrylamide, N,N-dimethylacrylamide and N,N-dimethylmethacrylamide. Further suitable monomers are amides of acrylic acid and derivatives thereof, such as ethacrylamide, N-methylacrylamide, N-ethylacrylamide, N-isopropylacrylamide, N-butylacrylamide, N-t-butylacrylamide, N-octylacrylamide, N-t-octylacrylamide, N-octadecylacrylamide, N-phenylacrylamide, N-

14

methylmethacrylamide, N-ethylmethacrylamide, N-isopropylmethacrylamide, N-dodecylmethacrylamide, N-[3-(dimethylamino)propyl]methacrylamide, N-[3-(dimethylamino)propyl]acrylamide, N-[3-(dimethylamino)butyl]methacrylamide, N-[8-(dimethylamino)octyl]methacrylamide, N-[12-(dimethylamino)dodecyl]methacrylamide,
 5 N-[3-(diethylamino)propyl]methacrylamide, N-[3-(diethylamino)propyl]acrylamide, unsaturated sulfonic acids, such as, for example, acrylamidopropansulfonic acid; 3-cyanoacrylic acid. Esters of acrylic acid and derivatives thereof, such as methyl acrylate, ethyl acrylate, propyl acrylate, n-butyl acrylate, isobutyl acrylate, t-butyl acrylate, 2-ethylhexyl acrylate, decyl acrylate, methyl methacrylate, ethyl methacrylate,
 10 propyl methacrylate, n-butyl methacrylate, isobutyl methacrylate, t-butyl methacrylate, 2-ethylhexyl methacrylate, decyl methacrylate, stearyl (meth)acrylate, 2,3-dihydroxypropyl acrylate, 2,3-dihydroxypropyl methacrylate, 2-hydroxyethyl acrylate, hydroxypropyl acrylates, 2-hydroxyethyl methacrylate, 2-hydroxyethyl ethacrylate, 2-methoxyethyl acrylate, 2-methoxyethyl methacrylate, 2-methoxyethyl ethacrylate, 2-
 15 ethoxyethyl methacrylate, 2-ethoxyethyl ethacrylate, hydroxypropyl methacrylates, glyceryl monoacrylate, glyceryl monomethacrylate, polyalkylene glycol (meth)acrylates, N,N-dimethylaminomethyl (meth)acrylate, N,N-diethylaminomethyl (meth)acrylate, N,N-dimethylaminoethyl (meth)acrylate, N,N-diethylaminoethyl (meth)acrylate, N,N-dimethylaminobutyl (meth) acrylate, N,N-diethylaminobutyl (meth)acrylate, N,N-
 20 dimethylaminohexyl (meth)acrylate, N,N-dimethylaminooctyl (meth)acrylate, N,N-dimethylaminododecyl (meth)acrylate.

Other suitable monomers for the polymerized unit (C) are heterocyclic compounds preferably vinylpyridine, vinyloxazoline and N-vinylimidazoles. Preferred heterocyclic
 25 compounds are 1-vinylimidazol, 2-methyl-1-vinylimidazol, 3-methyl-1-vinylimidazolium chloride and 3-methyl-1-vinylimidazolium methylsulfate.

The polymer comprising polymerized units (A), (B) and optionally (C) which is used as a support material in a fused filament fabrication process can be obtained by free-
 30 radical polymerization of monomers (A), (B) and optionally (C) described above. Suitable reaction conditions are disclosed in the documents US 6,803,405 and EP 0 688 799 which are incorporated into the present invention by reference.

Suitable polymers which are used as support materials according to the present
 35 invention have generally glass transition temperatures in the range of 40 to 200°C, preferably in the range of 50 to 180°C, more preferably in the range of 60 to 160°C and particularly in the range of 80 to 150°C.

Another object of the present invention is therefore the use of a polymer as a support
 40 material in a fused filament fabrication process, wherein the polymer has a glass transition temperature in the range of 40 to 200 °C.

15

Consequently, the polymers which are used as support materials have glass transition temperatures similar to that of modeling materials generally used in FFF processes.

5 Glass transition temperatures for the purpose of the invention are measured by differential scanning calorimetry (DSC) according to DIN 53765. Glass transition temperatures were determined using a TA Instruments Q2000. A temperature ramp speed of 20 K/min was used.

10 Normally the glass transition temperature of the polymer which is used as support material according to the invention has a glass transition temperature not more than 25° C lower than the modeling material. The polymer which is used as support material is not hygroscopic and shows minimal water uptake.

15 The polymer which is used as support material according to the invention generally as a mass average molecular mass (Mw) in the range of 30 to 1000 kg/mol, preferably in the range of 40 to 900 kg/mol and more preferably in the range of 60 to 800 kg/mol.

20 Another object of the present invention is therefore the use of a polymer as a support material in a fused filament fabrication process, wherein the polymer has a mass average molecular (Mw) in the range of 30 to 1000 kg/mol.

25 The weight average molecular mass (Mw) according to the invention is measured by gel permeation chromatography (GPC) with hexafluoro-2-propanol as eluent. Weight average molecular weights (Mw) according to the invention are determined by gel permeation chromatography using polymethyl methacrylate standards (PSS Polymer standards services GmbH). The measurements were performed at an oven temperature of 40°C with hexafluoroisopropanol (HFIP, with 0.05wt% trifluoroacetic acid sodium salt). A HFIP-LG guard column in combination with two HFIPgel columns (i.D. of 7.5mm and length of 30cm) (Polymer Laboratories Ltd.) were used, along with a
30 RI detector.

The polymer which is used as support material according to the invention shows a good solubility in water and can therefore be easily removed from the three-dimensional object.

35 The polymer which is used as a support material according to the invention shows significantly shorter times for solubilisation compared to support materials described in the state of the art.

40 The time for solubilisation of the polymer which is used as a support material according to the invention in distilled water at a temperature of 20°C is in the range of 0.2 to 20

16

minutes, preferably in the range of 0.5 to 18 minutes, more preferably in the range of 0.5 to 15 minutes and particularly in the range of 0.5 to 10 minutes.

The time for solubilisation of the polymer which is used as a support material according to the invention in an aqueous solution consisting of distilled water and 0,1M NaOH at a temperature of 20°C is in the range of 0.1 to 19 minutes, preferably in the range of 0.1 to 17 minutes, more preferably in the range of 0.1 to 15 minutes and particularly in the range of 0.5 to 10 minutes.

10 The time for solubilisation of the polymer which is used as a support material according to the present invention is measured in distilled water or in an aqueous solution consisting of distilled water and 0,1M NaOH at a temperature of 20°C. Therefore 0.25 g of the polymer is placed in 50 ml of distilled water or an aqueous solution consisting of distilled water and 0,1M NaOH, respectively. The time required until no undissolved
15 polymer remains is measured and is taken as the time for solubilisation. In some cases the solution turns turbid.

The polymer which is used as a support material according to the invention shows excellent viscosities for fused filament fabrication processes. The viscosity of the
20 polymer which is used as a support material according to the invention is in the range of 1 to 10 000 Pa*s, preferably in the range of 2 to 7 000 Pa*s and more preferably in the range of 2 to 5 000 Pa*s, measured at a temperature of 240°C at a shear rate of 10 rad/s.

25 Another object of the present invention is therefore the use of a polymer as a support material in a fused filament fabrication process, wherein the viscosity of the polymer is in the range of 1 to 10 000 Pa*s, measured at 240°C at a shear rate of 10 rad/s.

The viscosity is measured by means of rotation rheology measurements using a plate-
30 plate configuration on a DHR-1 TA Instruments rotational rheometer. A frequency sweep was performed between 0.06 and 400 rad/s) at a temperature of 240°C.

In a preferred embodiment the polymer which is used as a support material according to the invention comprises

35 20 to 80% by weight of polymerized unit (A) consisting of N-vinylpyrrolidone and 80 to 20% by weight of polymerized unit (B) consisting of vinyl acetate, based on the total weight of the polymer.

40 Another object of the present invention is therefore the use of a polymer as a support material in a fused filament fabrication process, wherein the polymer comprises 20 to 80% by weight of polymerized unit (A) consisting of N-vinylpyrrolidone and 80 to 20%

by weight of polymerized unit (B) consisting of vinyl acetate, based on the total weight of the polymer.


In another preferred embodiment the polymer which is used as a support material
5 according to the invention comprises

20 to 80% by weight of polymerized unit (A) consisting of N-vinylpyrrolidone,
80 to 20% by weight of polymerized unit (B) consisting of vinyl acetate and
1 to 10% by weight of polymerized unit (C) consisting of N-vinylcaprolactam
10 based on the total weight of the polymer.

Another object of the present invention is therefore the use of a polymer as a support material in a fused filament fabrication process, wherein the polymer comprises 20 to 80% by weight of polymerized unit (A) consisting of N-vinylpyrrolidone, 80 to 20% by weight of polymerized unit (B) consisting of vinyl acetate and 1 to 10% by weight of a polymerized unit (C) consisting of N-vinylcaprolactam, based on the total weight of the polymer.
15

In another preferred embodiment the polymer which is used as a support material
20 according to the invention comprises


20 to 80% by weight of polymerized unit (A) consisting of N-vinylpyrrolidone,
80 to 20% by weight of polymerized unit (B) consisting of vinyl acetate and
1 to 10% by weight of polymerized unit (C) consisting of at least one monovinyl ester of
25 the formula (III)



where R⁹ is C₃-C₂₀-alkyl, preferable C₄-C₁₅-alkyl and particularly C₈-C₁₂-alkyl, based on the total weight of the polymer.

30 Another object of the present invention is therefore the use of a polymer as a support material in a fused filament fabrication process, wherein the polymer comprises

20 to 80% by weight of polymerized unit (A) consisting of N-vinylpyrrolidone,
80 to 20% by weight of polymerized unit (B) consisting of vinyl acetate
35 and 1 to 10% by weight of a polymerized unit (C) consisting of at least one monovinyl ester of the formula (III)




where R^9 is C_3 - C_{20} -alkyl,
based on the total weight of the polymer.

5 In another preferred embodiment the polymer which is used as a support material according to the invention comprises

20 to 80% by weight of polymerized unit (A) consisting of N-vinylpyrrolidone,
80 to 20% by weight of polymerized unit (B) consisting of vinyl acetate and

10 1 to 10% by weight of polymerized unit (C) consisting of one monovinyl ester of the formula (III)



where R^9 is C_3 - C_{20} -alkyl, preferable C_4 - C_{15} -alkyl and particularly C_8 - C_{12} -alkyl,
based on the total weight of the polymer.

15

In a preferred embodiment the polymer which is used as a support material according to the invention consists of

20 to 80% by weight of polymerized unit (A) consisting of N-vinylpyrrolidone and

20 80 to 20% by weight of polymerized unit (B) consisting of vinyl acetate,
based on the total weight of the polymer.

In another preferred embodiment the polymer which is used as a support material according to the invention consists of


25

20 to 80% by weight of polymerized unit (A) consisting of N-vinylpyrrolidone,
80 to 20% by weight of polymerized unit (B) consisting of vinyl acetate and
1 to 10% by weight of polymerized unit (C) consisting of N-vinylcaprolactam
based on the total weight of the polymer.

30

In another preferred embodiment the polymer which is used as a support material according to the invention consists of


- 20 to 80% by weight of polymerized unit (A) consisting of N-vinylpyrrolidone,
 80 to 20% by weight of polymerized unit (B) consisting of vinyl acetate and
 1 to 10% by weight of polymerized unit (C) consisting of at least one monovinyl ester of
 5 the formula (III)



where R^9 is C_3 - C_{20} -alkyl, preferable C_4 - C_{15} -alkyl and particularly C_8 - C_{12} -alkyl, based on the total weight of the polymer.

- 10 In another preferred embodiment the polymer which is used as a support material according to the invention consists of

- 20 to 80% by weight of polymerized unit (A) consisting of N-vinylpyrrolidone,
 80 to 20% by weight of polymerized unit (B) consisting of vinyl acetate and
 15 1 to 10% by weight of polymerized unit (C) consisting of one monovinyl ester of the formula (III)



where R^9 is C_3 - C_{20} -alkyl, preferable C_4 - C_{15} -alkyl and particularly C_8 - C_{12} -alkyl, based on the total weight of the polymer.

20

Process for producing a three-dimensional object

- The above mentioned embodiments and preferences in respect of the modeling material, the support material and the polymer comprising polymerized units (A), (B)
 25 and optionally (C) apply analogously to the process for producing the three-dimensional object.

- The FFF process for the production of three-dimensional objects is well known in the state of the art and detailed explained in the above cited documents. The FFF process
 30 is also denominated as 3D printing process.

20

According to step i) the support material is deposited into a build chamber. Therefore the support material is provided in a solid state. Subsequently the support material is provided to a nozzle and heated to a temperature past the glass transition temperature of the support material and then deposited. The support material in the solid state can
5 be provided in form of a filament, as well as in granulate or powder form.

According to step ii) the modeling material is deposited into a build chamber. Therefore the modeling material is provided in a solid state. Subsequently the modeling material is provided to a second nozzle and heated to a temperature past the glass transition
10 temperature of the modeling material and then deposited. The modeling material in the solid state can be provided in form of a filament, as well as in granulate or powder form.

The FFF process for example can be carried out by the sequential discharging of
15 discontinuous drops of a solidifiable material. The solidifiable material is plasticized in the fluid phase and is introduced into a material store having at least one discharging unit which can be clocked. From there, the material is discharged in a dropwise manner by means of a discharging unit in the direction of an object carrier for an object, wherein the object carrier and an outlet opening can be moved at a relative spacing in
20 relation to one another in space in order to influence the drop shape. The creation of the drops is supported by changing the relative spacing in an alternating manner in opposite directions during the discharging of the drops from the discharging unit and during the application of the drops to the three-dimensional object during the production of the object. This process is described in WO 2012/028308.

25 In other words in steps i) and ii) of the inventive process the modeling material and the support material are each initially present in a solid state and thereafter melted and printed to form an three-dimensional object comprising the modeling material, which is supported by the support material. Subsequently the support material is removed in
30 step iii) by dissolving in an aqueous solution to obtain the three-dimensional object itself.

In other words in steps i) and ii) of the inventive process the modeling material and the support material are each initially present in a solid state in form of a filament, a
35 granulate or a powder and thereafter melted and printed to form an three-dimensional object comprising the modeling material, which is supported by the support material. Subsequently the support material is removed in step iii) by dissolving in an aqueous solution to obtain the three-dimensional object itself.

40 In step iii) the three-dimensional object comprising the modeling material and the support material is brought in contact with the aqueous solution. The three-dimensional

21

object comprising the modeling material and the support material therefore can simply be placed in a bath comprising the aqueous solution.

The aqueous solution normally has a pH value in the range of 6 to 9, preferably 6 to 8.

5

The temperature of the aqueous solution in step iii) is normally in the range of 10 to 100°C, preferably in the range of 15 to 90°C and more preferably in the range of 20 to 80°C.

- 10 Surprisingly the support material has a sufficient rate of dissolution and can be easily removed from the three-dimensional object.

As aqueous solution in a preferred embodiment tap water or distilled water is used.

- 15 The present invention is illustrated below by reference to examples, without limitation thereto.

The following polymers where tested:

- 20 Comparative example 1 (C1): acrylic copolymer; trade name P400 SR obtained from Stratasys.

Comparative example (C2): N-vinylpyrrolidone K30 homopolymer

- 25 Comparative example (C3): N-vinylpyrrolidone K90 homopolymer

Inventive example (E4): Copolymer comprising polymerized units of N-vinylpyrrolidone and vinyl acetate

- 30 Inventive example (E5): Copolymer comprising polymerized units of N-vinylpyrrolidone, vinyl acetate and a monovinyl ester of a C₄ to C₂₀ monocarboxylic acid

The weight average molecular weights (Mw) where determined by gel permeation chromatography using polymethyl methacrylate standards (PSS Polymer standards services GmbH). The measurements were performed at an oven temperature of 40°C
35 with hexafluoroisopropanol (HFIP, with 0.05wt% trifluoroacetic acid sodium salt). A HFIP-LG guard column in combination with two HFIPgel columns (i.D. of 7.5mm and length of 30cm) (Polymer Laboratories Ltd.) were used, along with a RI detector.

- 40 The viscosity of the polymers was measured at a temperature of 240°C at a shear rate of 10 rad/s by means of rotation rheology measurements using a plate-plate

22

configuration on a DHR-1 TA Instruments rotational rheometer. A frequency sweep was performed between 0.06 and 400 rad/s at a temperature of 240°C.

The glass transition temperatures (T_g) were measured by differential scanning calorimetry (DSC) according to DIN 53765 using a TA Instruments Q2000 and a temperature ramp speed of 20K/min.

The time for solubilisation was measured in distilled water or in an aqueous solution consisting of distilled water and 0,1M NaOH at a temperature of 20°C. Therefore 0.25 g of the polymer was placed in 50 ml of distilled water or an aqueous solution consisting of distilled water and 0,1M NaOH, respectively. The time required until no undissolved polymer remains was measured and was taken as the time for solubilisation.

The results are shown below in table 1.

15

Table 1

Example	M_w [kg/mol]	Viscosity at 10 rad/s [Pa*s]	T_g [°C]	Time for solubilisation [min]	
				Water	0.1M NaOH
C1	140	835	94.5	insoluble	30
C2	50	9000	168	4	0.5
C3	1400	10000	176	4	3
E4	40	13	107	2.5	0.5
E5	190	1650	112	17	16

The polymers according to the invention (examples E4 and E5) show glass transition temperatures (T_g) similar to that of conventionally used modeling materials. The viscosities of the polymers according to the invention make these polymers ideal for the use in a fused filament fabrication process. Moreover, the time for solubilisation is significantly shortened compared to support materials described in the state of the art.

The polymer according to comparative example C1 shows a suitable viscosity to be used in a fused filament fabrication process; however in water it is insoluble so that the removal of this support material is difficult. The polymers according to comparative examples C2 and C3 show good solubilisation times; however the high viscosities

23

make them difficult to process. Moreover, these polymers are highly hygroscopic and therefore difficult to store.

As shown above the polymers according to the invention meet at one and the same
 5 time the requirements of high glass transition temperature, good compatibility with the modeling material, suitable viscosity and easy removability.

Table 2 gives results for blends of the support material used in comparative
 example (C3) and the support material used in inventive example E4, namely a blend
 10 of a N-vinylpyrrolidone K90 homopolymer (C3) and a copolymer comprising polymerized units of N-vinylpyrrolidone and vinylacetate (E4) .

Three-point bending test

15 Unnotched charpy bars with dimensions (10 x 4 x 8 mm) were injected after processing the buffered polymer on a DSM mini-extruder. The polymer was extruded twice for 2 min each using a screw-speed of 80 rpm. These were bars used as test specimens to determine the flexural modulus as well as the stress and elongation at break in flexural tension using an ISO 178:2010 test. The flex-rate was set at 2 mm/min. The
 20 tests were performed at room temperature (23°C).

Table 2

Example	Content C3 [wt%]	Content E4 [wt%]	Mw [kg/mol]	Viscosity at 10 rad/s [Pa.s]	Tg [°C]	Flexural mechanical properties	
						Flexural modulus [MPa]	Elongation at break [%]
E6	10	90	126	300	105	3642	0.7
E7	20	80	176	366	105	3660	1.07
E8	30	70	246	575	106	3712	0.96


25 The inventive examples E6, E7 and E8 show the good mechanical properties of the blends. They show a high stiffness together with a glass transition temperature (T_g) and a viscosity that are ideal for the use in a fused filament fabrication process.

Claims

1. The use of a polymer comprising polymerized units (A) and (B):

5

- (A) at least one first monomer of the formula (I):

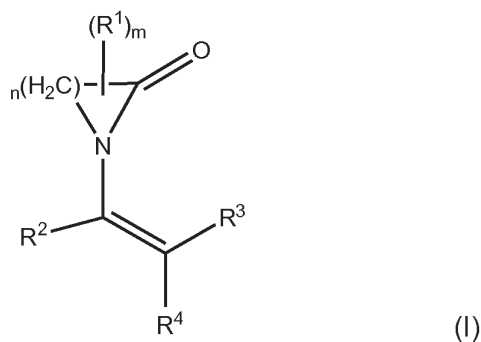

where

10

n is 3 to 12;


m is 0 to 3;

R^1 is C_1 - C_{10} -alkyl, C_2 - C_{10} -alkenyl, aryl or aralkyl;

R^2 , R^3 and R^4 are each, independently of one another, hydrogen, C_1 - C_{10} -alkyl, C_2 - C_{10} -alkenyl, aryl or aralkyl; and

15

- (B) at least one second monomer of the formula (II)



where

20

R^5 , R^6 and R^7 are each, independently of one another, hydrogen, C_1 - C_{10} -alkyl, C_2 - C_{10} -alkenyl, aryl or aralkyl;

R^8 is C_1 - C_{20} -alkyl, C_2 - C_{10} -alkenyl, aryl or aralkyl;

as a support material in a fused filament fabrication process.

25

2. The use according to claim 1, wherein the polymer comprises at least 20% by weight of the polymerized unit (A), based on the total weight of the polymer.


3. The use according to claim 1 or 2, wherein the polymer comprises 20 to 80% by weight of the polymerized unit (A) and

30

80 to 20% by weight of the polymerized unit (B),
based on the total weight of the polymer.


4. The use according to any one of claims 1 to 3, wherein the polymerized unit (A)
5 comprises at least one monomer selected from the group consisting of N-vinylpyrrolidone, N-vinylpiperidone and N-vinylcaprolactame.
5. The use according to any one of claims 1 to 4, wherein the polymerized unit (A)
10 comprises at least 80 % by weight of N-vinylpyrrolidone and 0 to 20 % by weight of at least one monomer of the formula (I) which is different from N-vinylpyrrolidone, based on the total weight of component (A).
6. The use according to any one of claims 1 to 5, wherein the polymerized unit (A)
15 comprises at least 80 % by weight of N-vinylpyrrolidone and 0 to 20 % by weight of N-vinylcaprolactam, based on the total weight of component (A).
7. The use according to any one of claims 1 to 6, wherein the polymerized unit (B)
20 comprises at least 80 % by weight of vinyl acetate and 0 to 20 % by weight of at least one monomer of the formula (II) which is different from N-vinyl acetate, based on the total weight of component (B).
8. The use according to any one of claims 1 to 7, wherein the polymerized unit (B)
25 comprises at least 80 % by weight of vinyl acetate and 0 to 20 % by weight of at least one monovinyl ester of a C₄ to C₂₀ monocarboxylic acid, based on the total weight of component (B).
9. The use according to any one of claims 1 to 8, wherein the polymer has a mass average molecular (Mw) in the range of 30 to 1000 kg/mol.
- 30 10. The use according to any one of claims 1 to 9, wherein the polymer has a glass transition temperature in the range of 40 to 200 °C.
11. The use according to any one of claims 1 to 10, wherein the viscosity of the
35 polymer is in the range of 1 to 10 000 Pa*s, measured at 240°C at a shear rate of 10 rad/s.
12. The use according to any of claims 1 to 11, wherein the polymer comprises
40 20 to 80 % by weight of polymerized unit (A) consisting of N-vinylpyrrolidone and 80 to 20 % by weight of polymerized unit (B) consisting of vinyl acetate, based on the total weight of the polymer.

13. The use according to any of claims 1 to 12, wherein the polymer comprises 20 to 80 % by weight of polymerized unit (A) consisting of N-vinylpyrrolidone, 80 to 20 % by weight of polymerized unit (B) consisting of vinyl acetate and 1 to 10 % by weight of a polymerized unit (C) consisting of N-vinylcaprolactam, based on the total weight of the polymer.
14. The use according to any of claims 1 to 12, wherein the polymer comprises 20 to 80 % by weight of polymerized unit (A) consisting of N-vinylpyrrolidone, 80 to 20 % by weight of polymerized unit (B) consisting of vinyl acetate and 1 to 10 % by weight of a polymerized unit (C) consisting of at least one monovinyl ester of the formula (III)



15. where R^9 is $\text{C}_3\text{-C}_{20}$ -alkyl, based on the total weight of the polymer.
15. A process for producing a three-dimensional object by a fused filament fabrication process comprising the steps:
- depositing a support material into a build chamber using a layer-based additive technique to form a support structure,
 - depositing a modeling material into the build chamber using the layer-based additive technique to form the three-dimensional object, wherein the three-dimensional object comprises at least one region supported by the support structure and
 - removing the support structure from the three-dimensional object with an aqueous solution,
- wherein the support material comprises a polymer comprising polymerized units (A) and (B):
- (A) at least one first monomer of the formula (I):

27

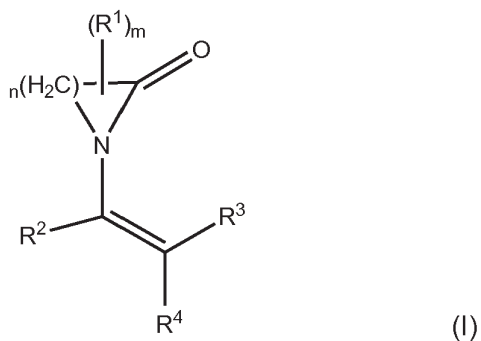

where

n is 3 to 12;


m is 0 to 3;

5 R¹ is C₁-C₁₀-alkyl, C₂-C₁₀-alkenyl, aryl or aralkyl;

R², R³ and R⁴ are each, independently of one another, hydrogen, C₁-C₁₀-alkyl, C₂-C₁₀-alkenyl, aryl or aralkyl; and

(B) at least one second monomer of the formula (II)

10



where

R⁵, R⁶ and R⁷ are each, independently of one another, hydrogen, C₁-C₁₀-alkyl, C₂-C₁₀-alkenyl, aryl or aralkyl;

15 R⁸ is C₁-C₂₀-alkyl, C₂-C₁₀-alkenyl, aryl or aralkyl.