

1Pos Copy
9606797-0

DC 1216
DB7-23

THIS SHEET HAS BEEN
REPLACED

COMPOSITION AND PROCESS FOR
MAKING POROUS ARTICLES FROM ULTRA HIGH
MOLECULAR WEIGHT POLYETHYLENE

BACKGROUND OF THE INVENTION

5

The present invention relates to an ultra high
molecular weight polyethylene composition particularly
suited for making molded plastic articles of high
10 strength and high porosity, to articles produced
therefrom, and to a process for their production.

15

20

25

Ultra high molecular weight polyethylene (UHMW-PE) is
known in the art to possess properties markedly
superior to similar polyethylenes of lower molecular
weight. Such properties include toughness, impact
strength, abrasion resistance, anti-friction properties
and resistance to corrosion and chemical attack. But
because of its extremely high molecular weight (at
least 10^6) and the high viscosity of UHMW-PE melts, it
is extremely difficult to process the material by
conventional techniques such as injection molding, blow
molding or screw extrusion. Such processing also may
give rise to a degradation of the polymer chains with a
consequential diminution of physical properties.

30

Porous sheets and articles made from polyethylene are
known in the art. For example, US Patent 3,024,208
discloses a process for the production of porous
polyethylene articles made by sintering (heating) of
particles of polyethylene having a molecular weight of

This Sheet Has Been Replaced



about 10,000 to 1,000,000 under heat and pressure without melting of the particles. US Patent 3,954,927 discloses a method for preparing porous articles comprising first forming a heterogeneous mixture of UHMW-PE particles with 50 to 95% by weight of a hydrocarbon such as mineral oil or a paraffin wax, heating the mixture to a temperature above the melting point of the hydrocarbon, forming the mixture into a shape, heating the shape to a second temperature above the melting point of the polyethylene until the polyethylene particles are completely fused, cooling the shape and then extracting the hydrocarbon to form the porous article. This extraction process leads to the formation of voids in the fused mass which creates porosity.

While these and similar processes offer the opportunity to minimize degradation of the polyethylene caused by conventional processing techniques as referred to above, it has been found that such porous articles are often brittle and easily fracturable, particularly when manufactured to give articles of higher porosity. Although low porosity articles may exhibit reasonably good stiffness, such low porosity articles are not suitable for many applications. Thus, there is a compromise of one property vs. the other. Accordingly, there is a continuing need to develop a process for producing porous articles made from UHMW-PE which offers better control of porosity while at the same time maintaining or improving the strength and flexibility of the article.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

SUMMARY OF THE INVENTION

5 It has now been discovered that strong, flexible porous
articles can be produced by free-sintering a non
intensively mixed blend of UHMW-PE particles and
particles of a polyethylene wax. The process involves
mixing the UHMW-PE and wax both in powdered form until
a uniform heterogeneous mixture is formed, but under
10 conditions which do not lead to any substantial
fracturing of the UHMW-PE particles or melting of
either component. The uniform heterogeneous mix is
then transferred to a press mold to form a shape and
pressure is applied sufficient only to maintain the
enclosed volume of the shape. The mold is heated to a
15 temperature above the melting point of the UHMW-PE but
below its degradation temperature for a period of time
to allow the particles to soften, expand, and contact
one another at their surfaces. The mixture is then
quickly cooled.

20 Porous articles so produced may exhibit flexural
stiffness values in excess of about 2,000 psi while at
the same time showing excellent porosity values of less
than about 25 inches water pressure drop, as defined
25 hereinafter.

DETAILED DESCRIPTION OF THE INVENTION

30 The present invention provides a composition and
process for producing molded porous articles of UHMW-PE
having high porosity and good flexural strength. Such
articles have utility as filter funnels, immersion

This Sheet Has Been Replaced



filters, filter crucibles, porous sheets, pen tips, marker nibs, aerators, diffusers and light weight molded parts.

5 The UHMW-PE used in the present invention generally exhibits a molecular weight of at least 1×10^6 , up to about 6×10^6 as determined by the intrinsic viscosity of a 0.05 weight percent solution in decahydronaphthalene at 135°C in accordance with ASTM
10 D-4020-81. Such polyethylenes may be produced by solution polymerization of ethylene using the well known coordination catalysts such as developed by Karl Ziegler.

15 Polyethylene waxes preferred for the purposes of this invention are commercially available materials exhibiting a melting point of at least about 100°C , preferably within the range of about 110 to 150°C , a density within the range of about 0.92 to about 0.99
20 g/cm^3 at 20°C , and a molecular weight in the range of about $1,000$ to about $20,000$, more preferably from about $2,000$ to about $10,000$. Most preferred are non-polar, non-oxidized waxes.

25 A molding composition is formed by dry blending particles of the UHMW-PE and particles of polyethylene wax in any suitable non-intensive mixing device for a period of time sufficient to form a uniform heterogeneous blend. This blending is conducted at a
30 temperature well below the melting point of either component, preferably room temperature, and for a period of time sufficient to form a uniform blend of non-melted and non-softened particles. Suitable mixers



include ~~X~~ ribbon blenders, double cone mixers, drum tumblers, cement mixers, twin shell (Vce) mixers or similar devices. It is important that the mixing be non-intensive and be limited to a time required to form a uniform blend in order to avoid excessive heat generation and to avoid excessive fracturing of the particles.

Blend ratios of the components may range from about 40 to 95% by weight of the UHMW-PE and correspondingly about 5 to about 60% by weight of the polyethylene wax. Wax levels above about 60% by weight tend to give rise to molded articles of poor or nonexistent porosity, while at levels below about 5% by weight there is little increase or even a diminution of the flexural strength of the article produced from the blend. Preferred levels are at least about 10% wax up to about 50% wax, more preferably from about 15 to about 45% wax.

Molded articles may be formed by a free sintering process which involves introducing the UHMW-PE/Wax mixture into either a partially or totally confined space and subjecting the mixture to heat sufficient to melt the wax and cause the UHMW-PE particles to soften, expand and contact one another. Suitable processes include compression molding and casting. The mold is heated with a heated hydraulic press or infrared heaters to a temperature above the melting point of the UHMW-PE, generally in the range of about 175°C to about 205°C; more preferably in the range of about 185°C to about 195°C. Heating time depends upon the mass of the mold, and lies generally within the range of about 5 to



about 15 minutes. Subsequently, the mold is cooled and the porous article removed.

5 During the heating process, the wax component melts and tends to form agglomerates with the UHMW-PE particles. This permits the wax to fill particle interstitial spaces and surface irregularities. The UHMW-PE, on the other hand, softens and undergoes surface sintering and bonding with neighboring particles. Upon cooling, and
10 as shrinkage occurs, larger void volumes are created in the UHMW-PE/Wax composite by changes in the wax morphology. The wax is further believed to act as a particle bonding agent giving rise to articles having greater flexibility and strength as compared with
15 articles produced from UHMW-PE alone. Micro photographs of the cooled composite show that ~~is~~ is not a homogeneous blend of the polymer and wax, but rather comprises numerous agglomerates of UHMW-PE particles which are both surface-fused together and surround
20 discrete particles or regions of the wax.

It has been found that the particle size distribution of the UHMW-PE particles used in the mixture is extremely influential upon the degree of porosity of
25 the finished article. An excess of fine particles tends to fill the intricities or voids resulting in an article of lower porosity. An excess of larger particles tends to provide insufficient surface area for particle-to-particle contact during the sintering
30 process. Preferably the UHMW-PE particles have a loose bulk density within the range of about 350 to 500 grams per liter as measured by ASTM D-1895 and a particle size distribution of at least about 95% through a 0.5



mm screen and not greater than about 15% through a 0.063 mm screen as measured by ASTM D-1921. The particle size distribution of the polyethylene wax is not necessarily critical, but the formation of a uniform heterogeneous mixture of the wax particles and the UHMW-PE particles is facilitated if the particle size distribution of each material approximate one another. The loose bulk density of the wax particles is preferably within the range of about 400 to 500 grams per liter.

In the following examples, various compositions are formulated and the porosity and stiffness values are reported.

Test samples are prepared by forming a 2-1/2 inch diameter disc, one quarter inch thick, in a suitable mold. The mold is filled with the appropriate polymer and the sides are tapped to settle the powder for uniformity and to improve packing. The top of the mold is leveled, the mold is covered and inserted into a hydraulic press. The press is closed sufficiently to contact the mold with just enough pressure to maintain an enclosed volume. A temperature of about 190°C is maintained on the press for a period of 12 minutes. The mold is then removed from the press and cooled quickly. The sample is removed from the mold and allowed to air cool for 24 hours.

The percent or degree of porosity is determined by placing the disc prepared as described above in an air chamber. The air chamber consists of a two section aluminum chamber six inches long and three and one



5 quarter inches outside diameter. Internal dimensions are approximately four inches in length and two inches in diameter. The disc is inserted in a recessed area between the two chambers, and the chamber is then closed and sealed. Each section of the chamber is equipped with one quarter inch inlet and outlet taps for differential pressure^(D.P.) measurement in inches of water.

10 An air flow of 25 SCFH is then established and the differential pressure is determined with a manometer. This measurement of differential pressure is indicative of the degree of porosity of the specimen tested; the lower the differential pressure, the higher the porosity. From experience with this method, 15 differential pressures of less than 25 inches water pressure drop are indicative of articles with excellent porosity.

20 Tinius-Olsen stiffness values of the various samples are measured in accordance with ASTM-D 747-84a.

25 This test method determines the apparent bending modulus of plastic materials by measuring force and angle of bend of a cantilever beam. A free sintered specimen is clamped in a vise and a controlled load is applied to the free end. The vice is connected through gear trains to a motor and is capable of uniform clockwise rotation. It is provided with a pointer for 30 indication of angular deflection. Rotation of the weighing system about the same point as the vice results due to movement of the blending plate. The



THIS SHEET HAS BEEN
REPLACED

9

magnitude of the movement is indicated with a pointer moving over a load scale.

5 The relationship of percent deflection vs load is
determined on three (3) specimens, which are prepared
in a mold equipped for eight (8) 1.5" x 0.25" x 0.125"
specimens. Sintering procedure is identical to that
described for the 2.5" diameter disk. Load readings
are taken at 3, 6, 9, 12, 15, 20, 25, and 30%
10 deflection and the slope is calculated. Stiffness is
determined by use of the equation:

$$E = \frac{4S_3}{wd} \times \frac{M \text{ (load scale reading)}}{100 \phi}$$

15 where E = Stiffness or Apparent Bending Modulus
S = 0.25", the distance between specimen
mounting plate and bending surface
w = 0.25", specimen width
20 d = 0.125", specimen thickness
M = 1.0 lbf-in, the total bending moment value
on the pendulum system
 ϕ = reading of angular deflection scale in
radians

25 The following examples are illustrative of the
invention.

30 EXAMPLES 1-9

Various blends were formed of UHMW-PE powder having a
molecular weight of about 3×10^6 and polyethylene wax
powder (Hoechst Wax PE 190), available from Hoechst

This Sheet Has Been Replaced.



THIS SHEET HAS BEEN
REPLACED

10

5 Celanese Corporation) at various levels shown in Table
1. Both components had a particle size distribution of
greater than 95% by weight through a 0.5 mm screen and
less than 15% by weight through a 0.063 mm screen. The
components were mixed for about 30 minutes at room
temperature in a ^{non-intensive} ribbon blender. Test~~x~~ discs were
prepared from each composition by the molding method
described above. A control sample consisting of 100%
10 of the UHMW-PE was also evaluated and designated as
control A.

Porosity and T/O stiffness values were then obtained
for each sample by the methods described above.
Results are reported in Table 1.

15

TABLE 1

	<u>% UHMW-PE</u>	<u>% WAX</u>	<u>T/O Stiffness, psi</u>	<u>Porosity, inches H₂O D.P.</u>	thS 3/2/80
	Control A (100%)	-	1886	18.1	
20	EX. 1 90% A	10	1591	15.4	
	EX. 2 80% A	20	1842	9.3	
	EX. 3 70% A	30	2704	6.0	
	EX. 4 60% A	40	2978	5.4	
	EX. 5 50% A	50	3078	10.9	
25	EX. 6 40% A	60	3006	24.5	
	EX. 7 30% A	70	3259	No Air Flow	
	EX. 8 20% A	80	16,014	No Air Flow	
	EX. 9 10% A	90	24,065	No Air Flow	

30 As can be seen from the data in Table 1, a distinctive
improvement in porosity was achieved at levels of
polyethylene wax ranging from about 10 to up to about
60%, with an exhibition of a concomitant improvement of

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

11

stiffness values of this particular batch of UHMW-PE beginning at wax levels between about 20 and 30% by weight.

EXAMPLES 10 - 14

Various blends were formed and processed as described in Examples 1 - 9 above using a different lot of UHMW-PE designated as Control B. Particle size distribution of the components in the blend were as described above. Porosity and stiffness values are as reported in Table 2.

TABLE 2

	<u>% UHMW-PE</u>	<u>% WAX</u>	<u>I/O Stiffness, psi</u>	<u>Porosity, inches H₂O D.P.</u>
Control B (100%)	-	-	1488	43.8
EX. 10	95% B	5	1480	38.2
EX. 11	90% B	10	1969	37.2
EX. 12	85% B	15	2050	29.5
EX. 13	80% B	20	2145	25.9
EX. 14	75% B	25	2960	23.0

hts
3/2/88

As demonstrated in Table 2, an improvement in stiffness value for this particular lot of UHMW-PE was demonstrated at a wax level somewhere between 5 and 10% with a consistent enhancement of porosity as the wax level was increased.

EXAMPLES 15 - 16

The UHMW-PE used in Examples 10 - 14 above (Control B) was blended with 25% by weight of Hoechst Wax PE-130

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

12

(Example 15) and 25% by weight of Hoechst Wax PE-520 (Example 16). Blending and molding was carried out as in Examples 1-9 and the particle size distribution of the materials was as specified in Examples 1-9. Porosity and stiffness values are as reported in Table 3.

TABLE 3

	<u>% UHMW-PE</u>	<u>% WAX</u>	<u>I/O Stiffness, psi</u>	<u>Porosity, inches H₂O D.P.</u>
Control A (100%)	-	-	1488	43.8
EX. 15	75% A	25%	3664	16.5
EX. 16	75% A	25%	2308	11.5

Test results demonstrate a marked improvement in both stiffness values and porosity at a preferred 25% level of addition of the various waxes with this particular batch of UHMW-PE polymer.

EXAMPLE 17

This example illustrates the importance of the particle size distribution of the UHMW-PE polymer used in the manufacture of the porous articles of this invention. An UHMW-PE polymer having a bulk density of 399 g/l and having a particle fines fraction of 35.1% passing through a 0.063 mm screen was employed as Control C. This material was blended with 25% by weight of Hoechst PE 190 wax and processed as in Examples 1 - 9. Stiffness and porosity results are shown in Table 4.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

TABLE 4

<u>% UHMW-PE</u>		<u>% WAX</u>	<u>I/O Stiffness, psi</u>	<u>Porosity, inches H₂O D.P.</u>
Control C (100%)		-	1197	39.2
EX. 17	75%	25	2306	35.1

As demonstrated from the data of Table 4, there is an increase in stiffness of the UHMW-PE polymer at the 75/25 blend ratio, but very little increase in porosity which can be attributed to the high fines content of the UHMW-PE used in this test.

This Sheet Has Been Replaced.



CLAIMS

THIS SHEET HAS BEEN
REPLACED

What I claim is:

1. A molding powder composition comprising a uniform mixture of particles of a polyethylene polymer having a molecular weight within the range of about 1×10^6 to about 6×10^6 and particles of polyethylene wax having a molecular weight within the range of about 1,000 to about 20,000, the particle size distribution of said particles of polyethylene polymer being within the range of at least about 95% by weight smaller than 0.5 millimeters and not greater than about 15% by weight smaller than 0.063 millimeters.

2. The composition of Claim 1 containing from about 40 to about 95% by weight of said polyethylene polymer and from about 5 to 60% by weight of said polyethylene wax.

3. The composition of Claim 2 wherein said polyethylene wax has a molecular weight within the range of about 2,000 to about 10,000, and a melting point within the range of about 100°C to about 150°C .

4. The composition of Claim 3 wherein said polyethylene wax has a particle size distribution in the range of at least about 95% by weight of particles smaller than 0.5 millimeters and not greater than about 15% by weight smaller than 0.063 millimeters.

5. The composition of Claim 2 containing from about 55 to 85% by weight of said polyethylene



This Sheet Has Been Replaced



polymer and from about 15 to about 45% by weight of said polyethylene wax.

6. The composition of Claim 5 containing about 75% by weight of said polyethylene polymer and about 25% by weight of said polyethylene wax.

7. A process for forming a porous article comprising:

- (A) providing a molding powder comprising the mixture of polyethylene polymer particles and polyethylene wax particles as defined in Claim 1;
- (B) forming said molding powder into a desired shape;
- (C) heating said shape to a temperature within the range of about 175°C to about 205°C while maintaining said shape under pressure just sufficient to maintain the volume of the shape and for a period of time sufficient to melt said polyethylene wax and permit said polyethylene polymer to expand and soften; and
- (D) thereafter cooling said shape.

8. The process of Claim 7 wherein said mixture is prepared by subjecting said particles of polyethylene polymer and polyethylene wax to




This Sheet Has Been Replaced



non-intensive mixing insufficient to cause substantial fracturing of said polyethylene polymer particles and at a temperature below the melting point of said polyethylene wax.

9. A porous shaped article produced by the process of Claim 7.

10. The article of Claim 9 having a porosity of less than about 25 inches of water as measured by differential pressure and a Tinius-Olsen stiffness value of at least about 2000 psi.

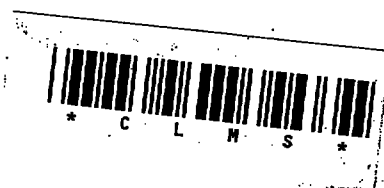

This Sheet Has Been Replaced





ABSTRACT OF THE INVENTION

5 Porous shaped articles made from a molded composite of
ultra high molecular weight polyethylene and
polyethylene wax are disclosed. These articles are
produced by free-sintering a non intensively mixed
blend of UHMW-PE particles and particles of a
polyethylene wax. The process involves mixing the
10 UHMW-PE and wax both in powdered form until a
heterogeneous mixture is formed, but under conditions
which do not lead to any substantial fracturing of the
UHMW-PE particles or melting of either component. The
heterogeneous mix is then transferred to a press mold
to form a shape and pressure is applied sufficient only
15 to maintain the enclosed volume of the shape. The mold
is heated to a temperature above the melting point of
the UHMW-PE for a period of time to allow the particles
to soften, expand, and contact one another at their
surfaces. The mixture is then quickly cooled.

20 Porous articles so produced may exhibit stiffness
values in excess of about 2000 psi while at the same
time showing excellent porosity values of less than
about 25 inches water pressure drop.

This Sheet Has Been Replaced



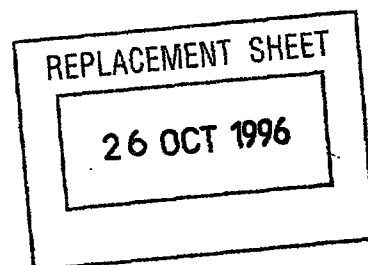

COMPOSITION AND PROCESS FOR
MAKING POROUS ARTICLES FROM ULTRA HIGH
MOLECULAR WEIGHT POLYETHYLENE

BACKGROUND OF THE INVENTION

The present invention relates to an ultra high molecular weight polyethylene composition particularly suited for making molded plastic articles of high strength and high porosity, to articles produced therefrom, and to a process for their production.

Ultra high molecular weight polyethylene (UHMW-PE) is known in the art to possess properties markedly superior to similar polyethylenes of lower molecular weight. Such properties include toughness, impact strength, abrasion resistance, anti-friction properties and resistance to corrosion and chemical attack. But because of its extremely high molecular weight (at least 10^6) and the high viscosity of UHMW-PE melts, it is extremely difficult to process the material by conventional techniques such as injection molding, blow molding or screw extrusion. Such processing also may give rise to a degradation of the polymer chains with a consequential diminution of physical properties.

Porous sheets and articles made from polyethylene are known in the art. For example, US Patent 3,024,208 discloses a process for the production of porous polyethylene articles made by sintering (heating) of particles of polyethylene having a molecular weight of

0-7010000

26 OCT 1996

about 10,000 to 1,000,000 under heat and pressure without melting of the particles. US Patent 3,954,927 discloses a method for preparing porous articles comprising first forming a heterogeneous mixture of UHMW-PE particles with 50 to 95% by weight of a hydrocarbon such as mineral oil or a paraffin wax, heating the mixture to a temperature above the melting point of the hydrocarbon, forming the mixture into a shape, heating the shape to a second temperature above the melting point of the polyethylene until the polyethylene particles are completely fused, cooling the shape and then extracting the hydrocarbon to form the porous article. This extraction process leads to the formation of voids in the fused mass which creates porosity.

While these and similar processes offer the opportunity to minimize degradation of the polyethylene caused by conventional processing techniques as referred to above, it has been found that such porous articles are often brittle and easily fracturable, particularly when manufactured to give articles of higher porosity. Although low porosity articles may exhibit reasonably good stiffness, such low porosity articles are not suitable for many applications. Thus, there is a compromise of one property vs. the other. Accordingly, there is a continuing need to develop a process for producing porous articles made from UHMW-PE which offers better control of porosity while at the same time maintaining or improving the strength and flexibility of the article.

26 OCT 1996

SUMMARY OF THE INVENTION

It has now been discovered that strong, flexible porous articles can be produced by free-sintering a non intensively mixed blend of UHMW-PE particles and particles of a polyethylene wax. The process involves mixing the UHMW-PE and wax both in powdered form until a uniform heterogeneous mixture is formed, but under conditions which do not lead to any substantial fracturing of the UHMW-PE particles or melting of either component. The uniform heterogeneous mix is then transferred to a press mold to form a shape and pressure is applied sufficient only to maintain the enclosed volume of the shape. The mold is heated to a temperature above the melting point of the UHMW-PE but below its degradation temperature for a period of time to allow the particles to soften, expand, and contact one another at their surfaces. The mixture is then quickly cooled.

Porous articles so produced may exhibit flexural stiffness values in excess of about 2,000 psi while at the same time showing excellent porosity values of less than about 25 inches water pressure drop, as defined hereinafter.

DETAILED DESCRIPTION OF THE INVENTION

The present invention provides a composition and process for producing molded porous articles of UHMW-PE having high porosity and good flexural strength. Such articles have utility as filter funnels, immersion

26 OCT 1996

filters, filter crucibles, porous sheets, pen tips, marker nibs, aerators, diffusers and light weight molded parts.

The UHMW-PE used in the present invention generally exhibits a molecular weight of at least 1×10^6 , up to about 6×10^6 as determined by the intrinsic viscosity of a 0.05 weight percent solution in decahydronaphthalene at 135°C in accordance with ASTM D-4020-81. Such polyethylenes may be produced by solution polymerization of ethylene using the well known coordination catalysts such as developed by Karl Ziegler.

Polyethylene waxes preferred for the purposes of this invention are commercially available materials exhibiting a melting point of at least about 100°C , preferably within the range of about 110 to 150°C , a density within the range of about 0.92 to about 0.99 g/cm^3 at 20°C , and a molecular weight in the range of about 1,000 to about 20,000, more preferably from about 2,000 to about 10,000. Most preferred are non-polar, non-oxidized waxes.

A molding composition is formed by dry blending particles of the UHMW-PE and particles of polyethylene wax in any suitable non-intensive mixing device for a period of time sufficient to form a uniform heterogeneous blend. This blending is conducted at a temperature well below the melting point of either component, preferably room temperature, and for a period of time sufficient to form a uniform blend of non-melted and non-softened particles. Suitable mixers

26 OCT 1996

include ~~X~~ ribbon blenders, double cone mixers, drum tumblers, cement mixers, twin shell (Vce) mixers or similar devices. It is important that the mixing be non-intensive and be limited to a time required to form a uniform blend in order to avoid excessive heat generation and to avoid excessive fracturing of the particles.

Blend ratios of the components may range from about 40 to 95% by weight of the UHMW-PE and correspondingly about 5 to about 60% by weight of the polyethylene wax. Wax levels above about 60% by weight tend to give rise to molded articles of poor or nonexistent porosity, while at levels below about 5% by weight there is little increase or even a diminution of the flexural strength of the article produced from the blend. Preferred levels are at least about 10% wax up to about 50% wax, more preferably from about 15 to about 45% wax.

Molded articles may be formed by a free sintering process which involves introducing the UHMW-PE/Wax mixture into either a partially or totally confined space and subjecting the mixture to heat sufficient to melt the wax and cause the UHMW-PE particles to soften, expand and contact one another. Suitable processes include compression molding and casting. The mold is heated with a heated hydraulic press or infrared heaters to a temperature above the melting point of the UHMW-PE, generally in the range of about 175°C to about 205°C; more preferably in the range of about 185°C to about 195°C. Heating time depends upon the mass of the mold, and lies generally within the range of about 5 to

26 OCT 1996

about 15 minutes. Subsequently, the mold is cooled and the porous article removed.

During the heating process, the wax component melts and tends to form agglomerates with the UHMW-PE particles. This permits the wax to fill particle interstitial spaces and surface irregularities. The UHMW-PE, on the other hand, softens and undergoes surface sintering and bonding with neighboring particles. Upon cooling, and as shrinkage occurs, larger void volumes are created in the UHMW-PE/Wax composite by changes in the wax morphology. The wax is further believed to act as a particle bonding agent giving rise to articles having greater flexibility and strength as compared with articles produced from UHMW-PE alone. Micro photographs of the cooled composite show that it is not a homogeneous blend of the polymer and wax, but rather comprises numerous agglomerates of UHMW-PE particles which are both surface-fused together and surround discrete particles or regions of the wax.

It has been found that the particle size distribution of the UHMW-PE particles used in the mixture is extremely influential upon the degree of porosity of the finished article. An excess of fine particles tends to fill the intricities or voids resulting in an article of lower porosity. An excess of larger particles tends to provide insufficient surface area for particle-to-particle contact during the sintering process. Preferably the UHMW-PE particles have a loose bulk density within the range of about 350 to 500 grams per liter as measured by ASTM D-1895 and a particle size distribution of at least about 95% through a 0.5

26 OCT 1996

mm screen and not greater than about 15% through a 0.063 mm screen as measured by ASTM D-1921. The particle size distribution of the polyethylene wax is not necessarily critical, but the formation of a uniform heterogeneous mixture of the wax particles and the UHMW-PE particles is facilitated if the particle size distribution of each material approximate one another. The loose bulk density of the wax particles is preferably within the range of about 400 to 500 grams per liter.

In the following examples, various compositions are formulated and the porosity and stiffness values are reported.

Test samples are prepared by forming a 2-1/2 inch diameter disc, one quarter inch thick, in a suitable mold. The mold is filled with the appropriate polymer and the sides are tapped to settle the powder for uniformity and to improve packing. The top of the mold is leveled, the mold is covered and inserted into a hydraulic press. The press is closed sufficiently to contact the mold with just enough pressure to maintain an enclosed volume. A temperature of about 190°C is maintained on the press for a period of 12 minutes. The mold is then removed from the press and cooled quickly. The sample is removed from the mold and allowed to air cool for 24 hours.

The percent or degree of porosity is determined by placing the disc prepared as described above in an air chamber. The air chamber consists of a two section aluminum chamber six inches long and three and one

26 OCT 1996

quarter inches outside diameter. Internal dimensions are approximately four inches in length and two inches in diameter. The disc is inserted in a recessed area between the two chambers, and the chamber is then closed and sealed. Each section of the chamber is equipped with one quarter inch inlet and outlet taps for differential pressure ^(D.P.) measurement in inches of water.

An air flow of 25 SCFH is then established and the differential pressure is determined with a manometer. This measurement of differential pressure is indicative of the degree of porosity of the specimen tested; the lower the differential pressure, the higher the porosity.. From experience with this method, differential pressures of less than 25 inches water pressure drop are indicative of articles with excellent porosity.

Tinius-Olsen stiffness values of the various samples are measured in accordance with ASTM-D 747-84a.

This test method determines the apparent bending modulus of plastic materials by measuring force and angle of bend of a centilever beam. A free sintered specimen is clamped in a vise and a controlled load is applied to the free end. The vice is connected through gear trains to a motor and is capable of uniform clockwise rotation. It is provided with a pointer for indication of angular deflection. Rotation of the weighing system about the same point as the vice results due to movement of the blending plate. The

26 OCT 1996

magnitude of the movement is indicated with a pointer moving over a load scale.

The relationship of percent deflection vs load is determined on three (3) specimens, which are prepared in a mold equipped for eight (8) 1.5" x 0.25" x 0.125" specimens. Sintering procedure is identical to that described for the 2.5" diameter disk. Load readings are taken at 3, 6, 9, 12, 15, 20, 25, and 30% deflection and the slope is calculated. Stiffness is determined by use of the equation:

$$E = \frac{4S_3}{wd} \times \frac{M \text{ (load scale reading)}}{100 \theta}$$

where

- E = Stiffness or Apparent Bending Modulus
- S = 0.25", the distance between specimen mounting plate and bending surface
- w = 0.25", specimen width
- d = 0.125", specimen thickness
- M = 1.0 lbf-in, the total bending moment⁺ value on the pendulum system
- θ = reading of angular deflection scale in radians

The following examples are illustrative of the invention.

EXAMPLES 1-9

Various blends were formed of UHMW-PE powder having a molecular weight of about 3×10^6 and polyethylene wax powder (Hoechst Wax PE 190) available from Hoechst

26 OCT 1996

Celanese Corporation) at various levels shown in Table 1. Both components had a particle size distribution of greater than 95% by weight through a 0.5 mm screen and less than 15% by weight through a 0.063 mm screen. The components were mixed for about 30 minutes at room temperature in a ^{non-intensive} ribbon blender. Test discs were prepared from each composition by the molding method described above. A control sample consisting of 100% of the UHMW-PE was also evaluated and designated as control A.

Porosity and T/O stiffness values were then obtained for each sample by the methods described above. Results are reported in Table 1.

TABLE 1

<u>% UHMW-PE</u>		<u>% WAX</u>	<u>T/O Stiffness, psi</u>	<u>Porosity, inches H₂O D.P.</u>
Control A (100%)		-	1886	18.1
EX. 1	90% A	10	1591	15.4
EX. 2	80% A	20	1842	9.3
EX. 3	70% A	30	2704	6.0
EX. 4	60% A	40	2978	5.4
EX. 5	50% A	50	3078	10.9
EX. 6	40% A	60	3006	24.5
EX. 7	30% A	70	3259	No Air Flow
EX. 8	20% A	80	16,014	No Air Flow
EX. 9	10% A	90	24,065	No Air Flow

As can be seen from the data in Table 1, a distinctive improvement in porosity was achieved at levels of polyethylene wax ranging from about 10 to up to about 60%, with an exhibition of a concomitant improvement of

26 OCT 1996

11

stiffness values of this particular batch of UHMW-PE beginning at wax levels between about 20 and 30% by weight.

EXAMPLES 10 - 14

Various blends were formed and processed as described in Examples 1 - 9 above using a different lot of UHMW-PE designated as Control B. Particle size distribution of the components in the blend were as described above. Porosity and stiffness values are as reported in Table 2.

TABLE 2

	<u>% UHMW-PE</u>	<u>% WAX</u>	<u>I/O Stiffness, psi</u>	<u>Porosity, inches H₂O D.P.</u>
Control B (100%)		-	1488	43.8
EX. 10	95% B	5	1480	38.2
EX. 11	90% B	10	1969	37.2
EX. 12	85% B	15	2050	29.5
EX. 13	80% B	20	2145	25.9
EX. 14	75% B	25	2960	23.0

As demonstrated in Table 2, an improvement in stiffness value for this particular lot of UHMW-PE was demonstrated at a wax level somewhere between 5 and 10% with a consistent enhancement of porosity as the wax level was increased.

EXAMPLES 15 - 16

The UHMW-PE used in Examples 10 - 14 above (Control B) was blended with 25% by weight of Hoechst Wax PE-130

26 OCT 1996

(Example 15) and 25% by weight of Hoechst Wax PE-520 (Example 16). Blending and molding was carried out as in Examples 1-9 and the particle size distribution of the materials was as specified in Examples 1-9. Porosity and stiffness values are as reported in Table 3.

TABLE 3

<u>% UHMW-PE</u>	<u>% WAX</u>	<u>I/O Stiffness, psi</u>	<u>Porosity, inches H₂O D.P.</u>
Control A (100%)	-	1488	43.8
EX. 15 75% A	25%	3664	16.5
EX. 16 75% A	25%	2308	11.5

Test results demonstrate a marked improvement in both stiffness values and porosity at a preferred 25% level of addition of the various waxes with this particular batch of UHMW-PE polymer.

EXAMPLE 17

This example illustrates the importance of the particle size distribution of the UHMW-PE polymer used in the manufacture of the porous articles of this invention. An UHMW-PE polymer having a bulk density of 399 g/l and having a particle fines fraction of 35.1% passing through a 0.063 mm screen was employed as Control C. This material was blended with 25% by weight of Hoechst PE 190 wax and processed as in Examples 1 - 9. Stiffness and porosity results are shown in Table 4.

26 OCT 1996

TABLE 4

<u>% UHMW-PE</u>	<u>% WAX</u>	<u>I/O Stiffness, psi</u>	<u>Porosity, inches H₂O D.P.</u>
Control C (100%)	-	1197	39.2
EX. 17 75%	25	2306	35.1

As demonstrated from the data of Table 4, there is an increase in stiffness of the UHMW-PE polymer at the 75/25 blend ratio, but very little increase in porosity which can be attributed to the high fines content of the UHMW-PE used in this test.

26 OCT 1996

CLAIMS

What I claim is:

1. A molding powder composition comprising a uniform mixture of particles of a polyethylene polymer having a molecular weight within the range of about 1×10^6 to about 6×10^6 and particles of polyethylene wax having a molecular weight within the range of about 1,000 to about 20,000, the particle size distribution of said particles of polyethylene polymer being within the range of at least about 95% by weight smaller than 0.5 millimeters and not greater than about 15% by weight smaller than 0.063 millimeters.

2. The composition of Claim 1 containing from about 40 to about 95% by weight of said polyethylene polymer and from about 5 to 60% by weight of said polyethylene wax.

3. The composition of Claim 2 wherein said polyethylene wax has a molecular weight within the range of about 2,000 to about 10,000, and a melting point within the range of about 100°C to about 150°C .

4. The composition of Claim 3 wherein said polyethylene wax has a particle size distribution in the range of at least about 95% by weight of particles smaller than 0.5 millimeters and not greater than about 15% by weight smaller than 0.063 millimeters.

5. The composition of Claim 2 containing from about 55 to 85% by weight of said polyethylene



26 OCT 1996

polymer and from about 15 to about 45% by weight of said polyethylene wax.

6. The composition of Claim 5 containing about 75% by weight of said polyethylene polymer and about 25% by weight of said polyethylene wax.

7. A process for forming a porous article comprising:

- (A) providing a molding powder comprising the mixture of polyethylene polymer particles and polyethylene wax particles as defined in Claim 1;
- (B) forming said molding powder into a desired shape;
- (C) heating said shape to a temperature within the range of about 175°C to about 205°C while maintaining said shape under pressure just sufficient to maintain the volume of the shape and for a period of time sufficient to melt said polyethylene wax and permit said polyethylene polymer to expand and soften; and
- (D) thereafter cooling said shape.


8. The process of Claim 7 wherein said mixture is prepared by subjecting said particles of polyethylene polymer and polyethylene wax to



non-intensive mixing insufficient to cause substantial fracturing of said polyethylene polymer particles and at a temperature below the melting point of said polyethylene wax.

9. A porous shaped article produced by the process of Claim 7.

10. The article of Claim 9 having a porosity of less than about 25 inches of water as measured by differential pressure and a Tinius-Olsen stiffness value of at least about 2000 psi.

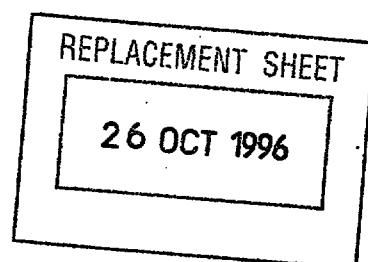

COMPOSITION AND PROCESS FOR
MAKING POROUS ARTICLES FROM ULTRA HIGH
MOLECULAR WEIGHT POLYETHYLENE

ABSTRACT OF THE INVENTION

Porous shaped articles made from a molded composite of ultra high molecular weight polyethylene and polyethylene wax are disclosed. These articles are produced by free-sintering a non intensively mixed blend of UHMW-PE particles and particles of a polyethylene wax. The process involves mixing the UHMW-PE and wax both in powdered form until a heterogeneous mixture is formed, but under conditions which do not lead to any substantial fracturing of the UHMW-PE particles or melting of either component. The heterogeneous mix is then transferred to a press mold to form a shape and pressure is applied sufficient only to maintain the enclosed volume of the shape. The mold is heated to a temperature above the melting point of the UHMW-PE for a period of time to allow the particles to soften, expand, and contact one another at their surfaces. The mixture is then quickly cooled.

Porous articles so produced may exhibit stiffness values in excess of about 2000 psi while at the same time showing excellent porosity values of less than about 25 inches water pressure drop.

REPLACEMENT SHEET

26 OCT 1996

0-7276000