



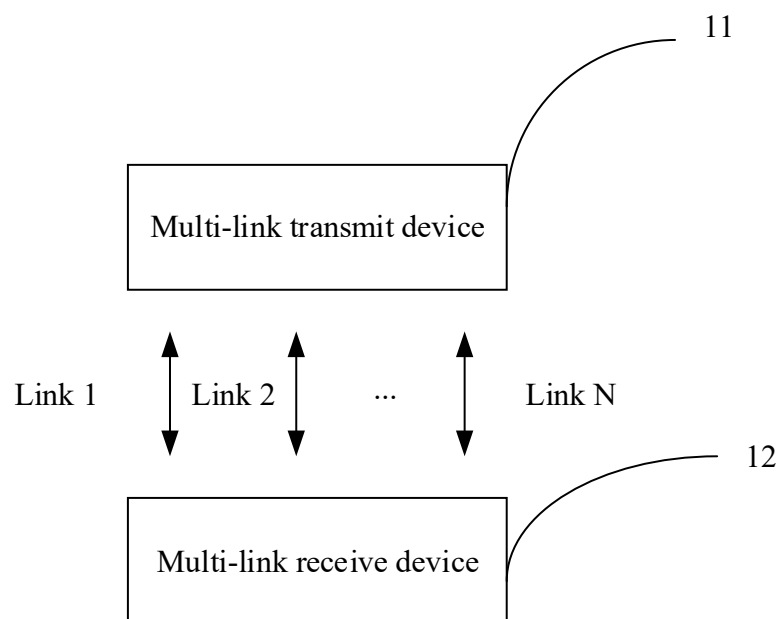


FIG. 1

AP multi-link device

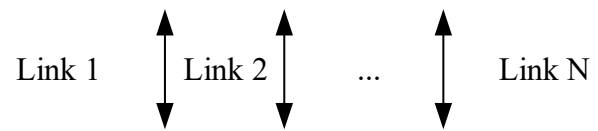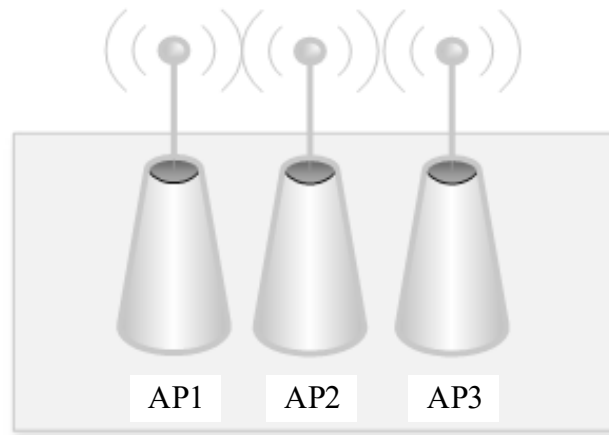

Non-AP multi-link device



FIG. 2

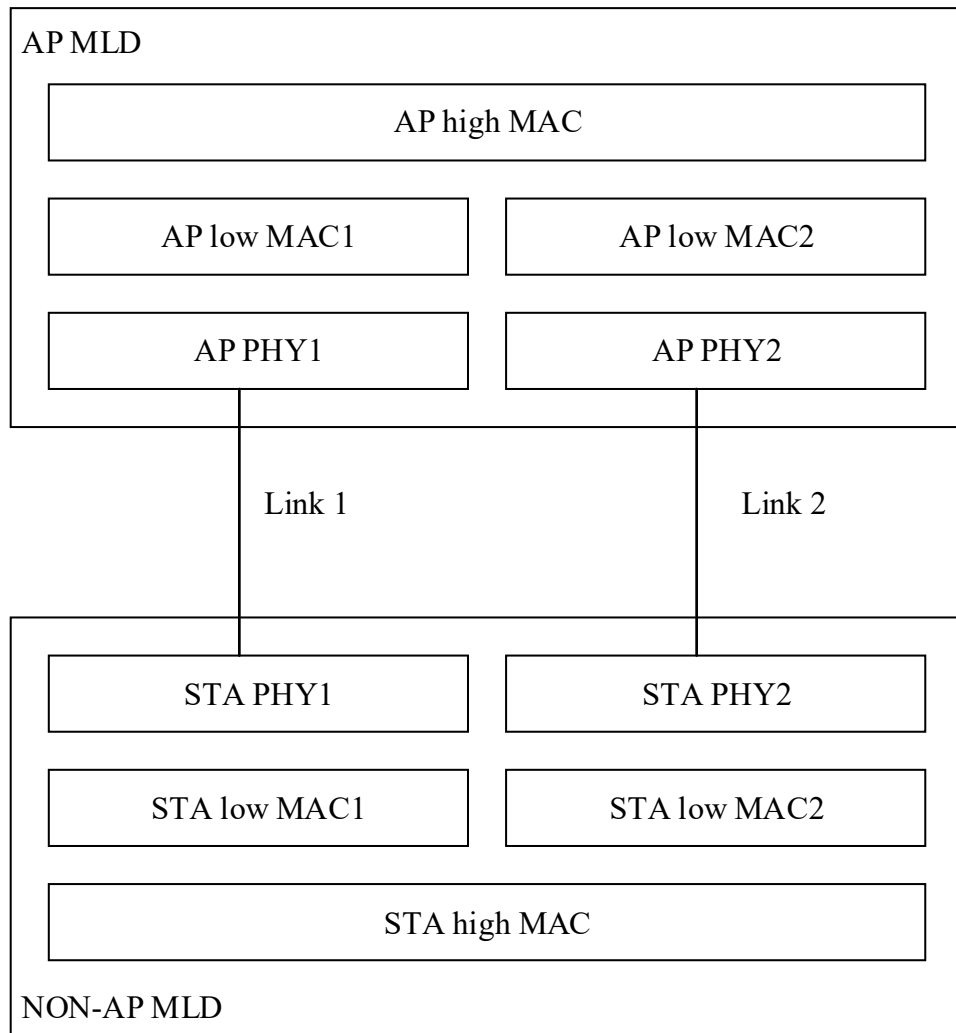


FIG. 3

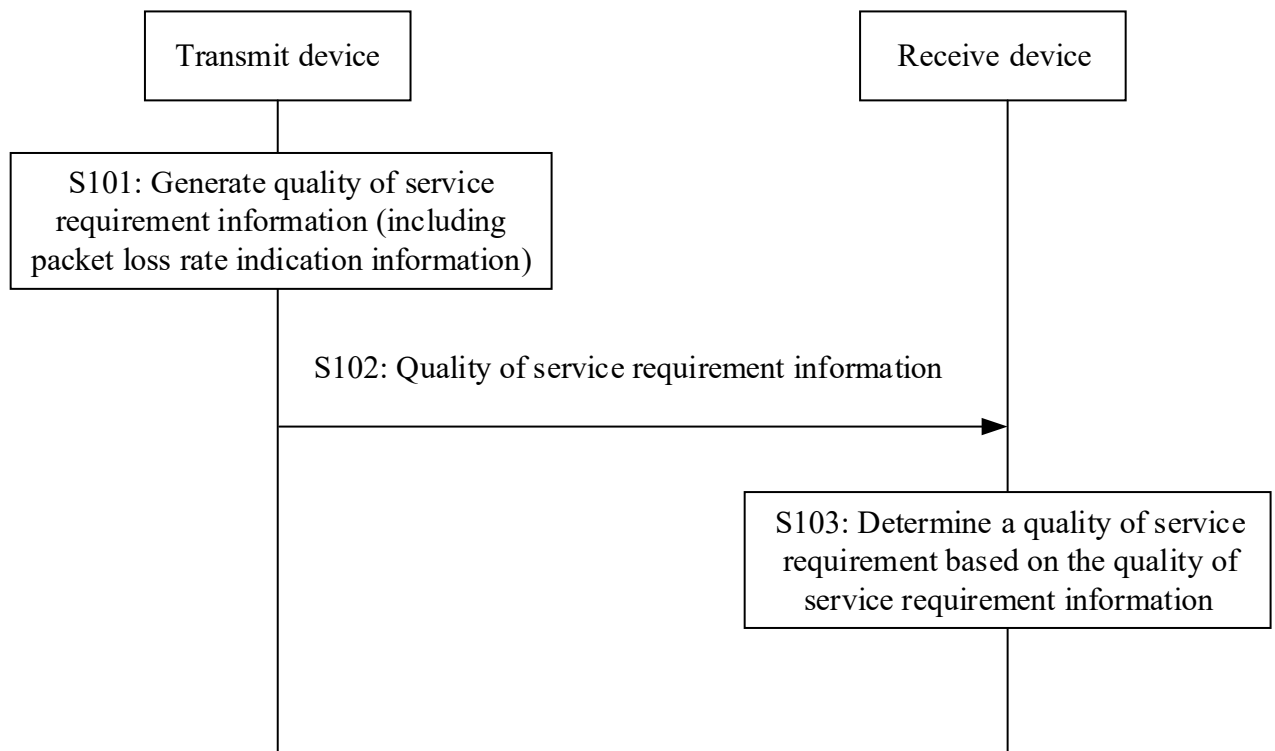


FIG. 4

Element ID	Length	Traffic identifier bitmap	Transmission direction	Minimum service interval	Maximum service interval	Inactivity interval	Suspension interval	Service start time	Minimum data rate
1	1	1	1	4	4	4	4	4	4

Byte:

Mean data rate	Burst size	Delay bound	Discard age	Acceptable maximum number of lost packets	Reference number of service data packets	Indication information indicating whether to enable triggering, based on an average packet loss rate, sending quality of service requirement information	Threshold of the average packet loss rate
4	4	4	2	4	4	1	1

FIG. 5

Element ID	Length	Traffic identifier bitmap	Transmission direction	Minimum service interval	Maximum service interval	Inactivity interval	Suspension interval	Service start time	Minimum data rate
1	1	1	1	4	4	4	4	4	4

Byte:

Mean data rate	Burst size	Delay bound	Discard age	Acceptable maximum packet loss rate	Reference number of service data packets	Indication information indicating whether to enable triggering, based on an average packet loss rate, sending quality of service requirement information	Threshold of the average packet loss rate
4	4	4	2	4	4	1	1

FIG. 6

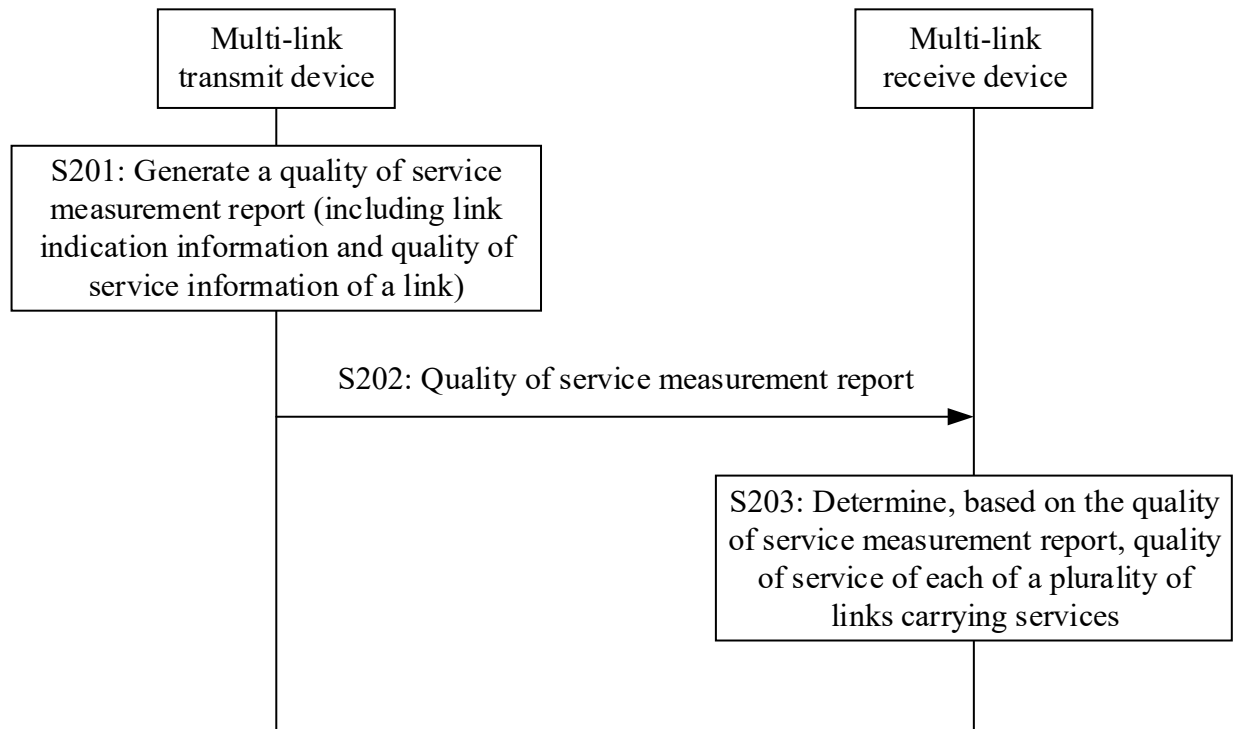


FIG. 7

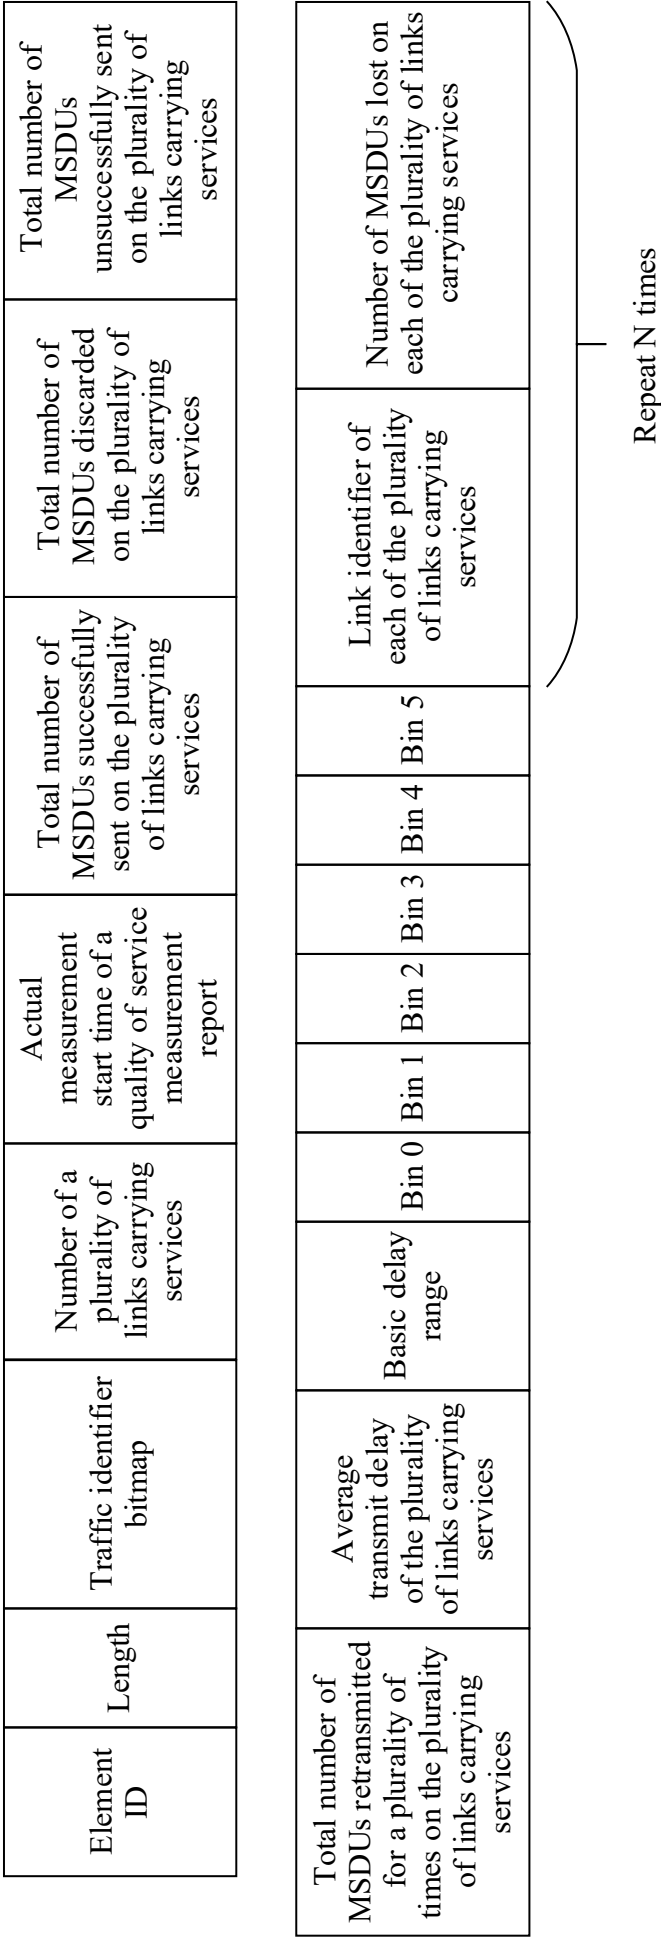


FIG. 8

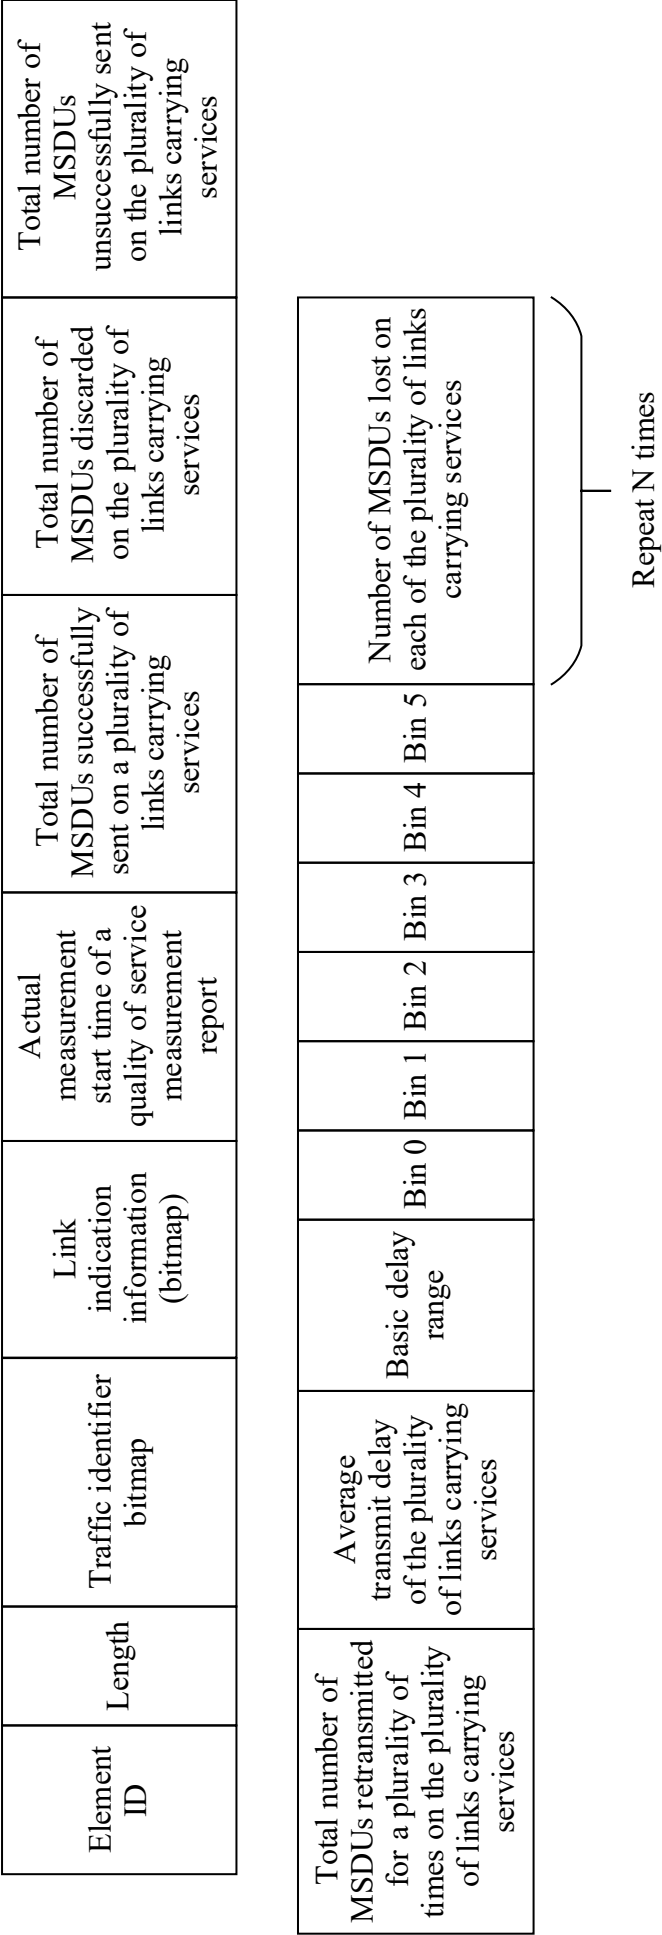


FIG. 9

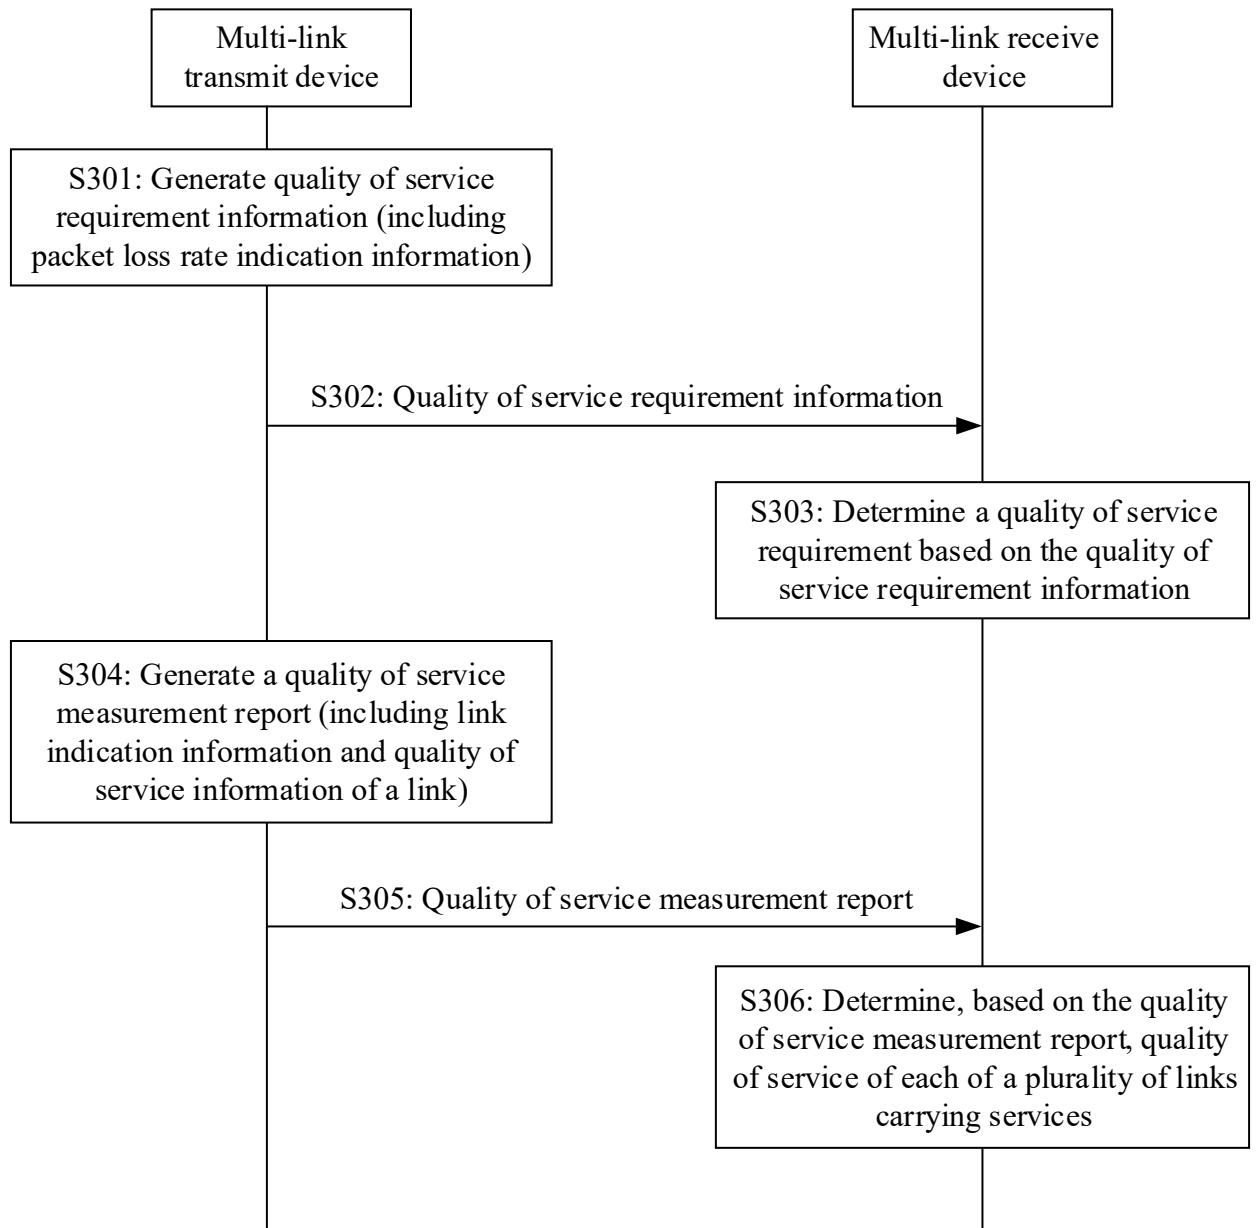


FIG. 10

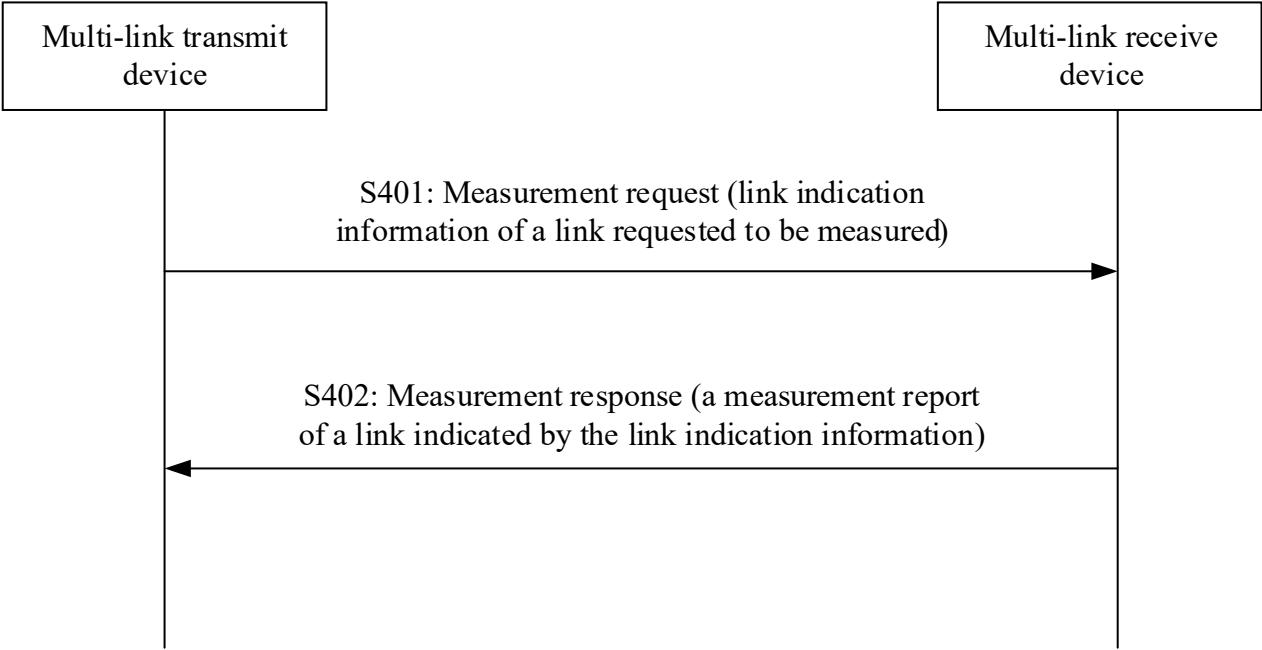


FIG. 11

Element ID	Element length	Measurement request information	Subelement ID	Subelement length	Link indication information of a link requested to be measured
------------	----------------	---------------------------------	---------------	-------------------	--

FIG. 12

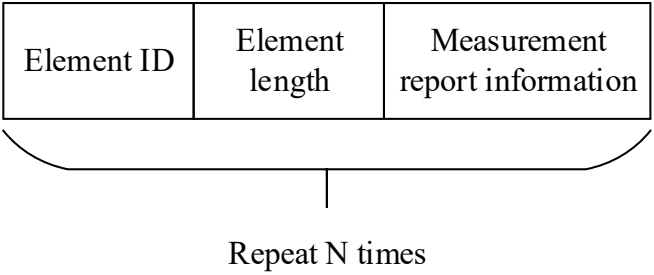


FIG. 13

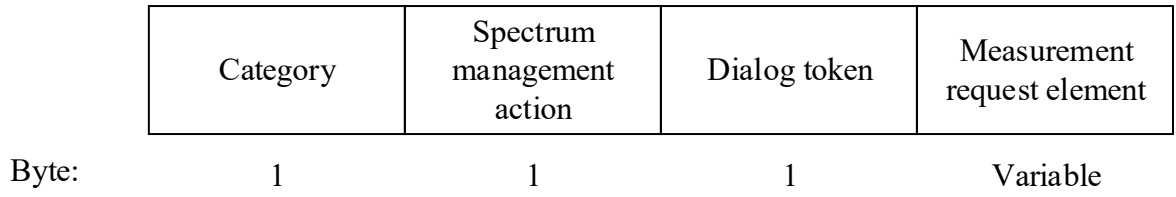


FIG. 14

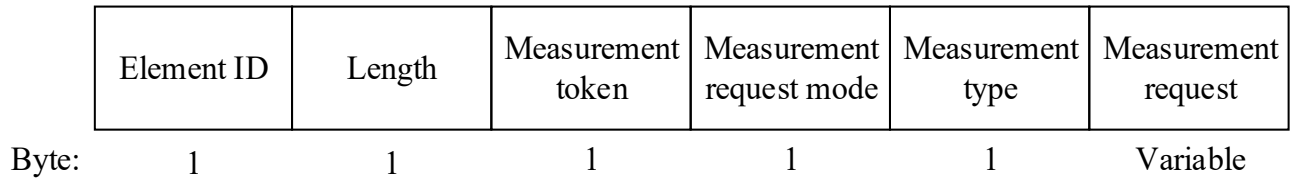


FIG. 15

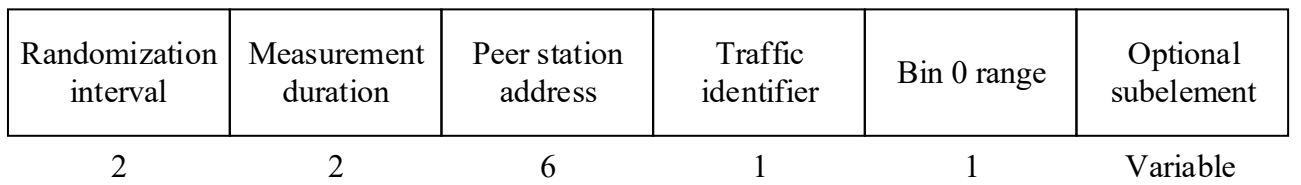


FIG. 16

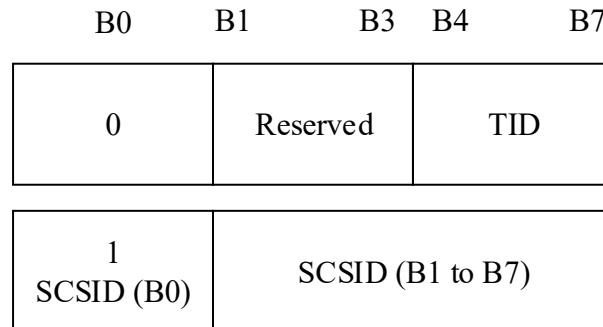


FIG. 17

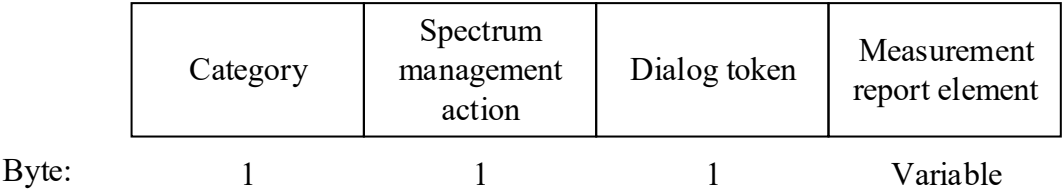


FIG. 18

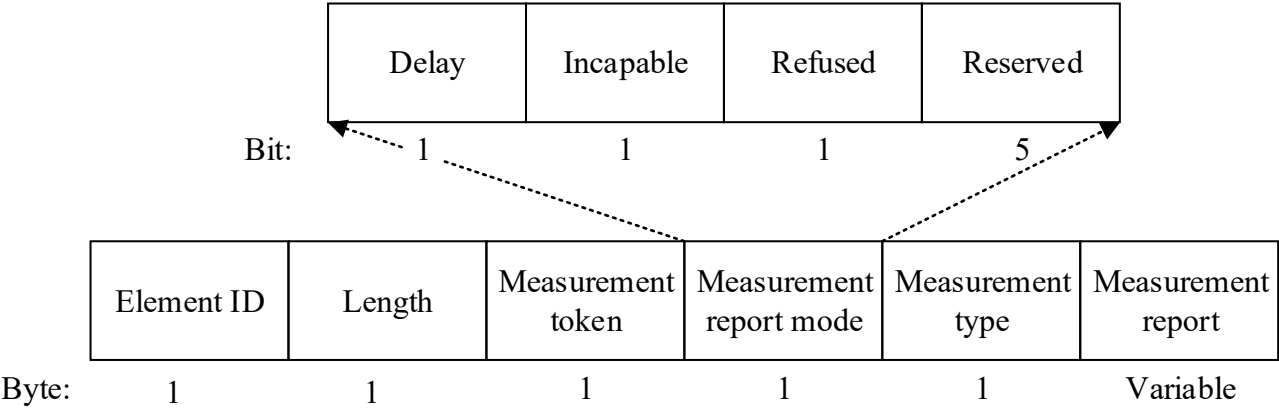


FIG. 19

Actual measurement start time	Measurement duration	Peer station address	Traffic identifier	Reporting reason	Transmitted MSDU count	MSDU discarded count	MSDU failed count			
MSDU multiple retry count	QoS CF-Polls lost count or MSDU delivery count	Average transmit delay	Bin 0 range	Bin 0	Bin 1	Bin 2	Bin 3	Bin 4	Bin 5	Optional subelement

FIG. 20

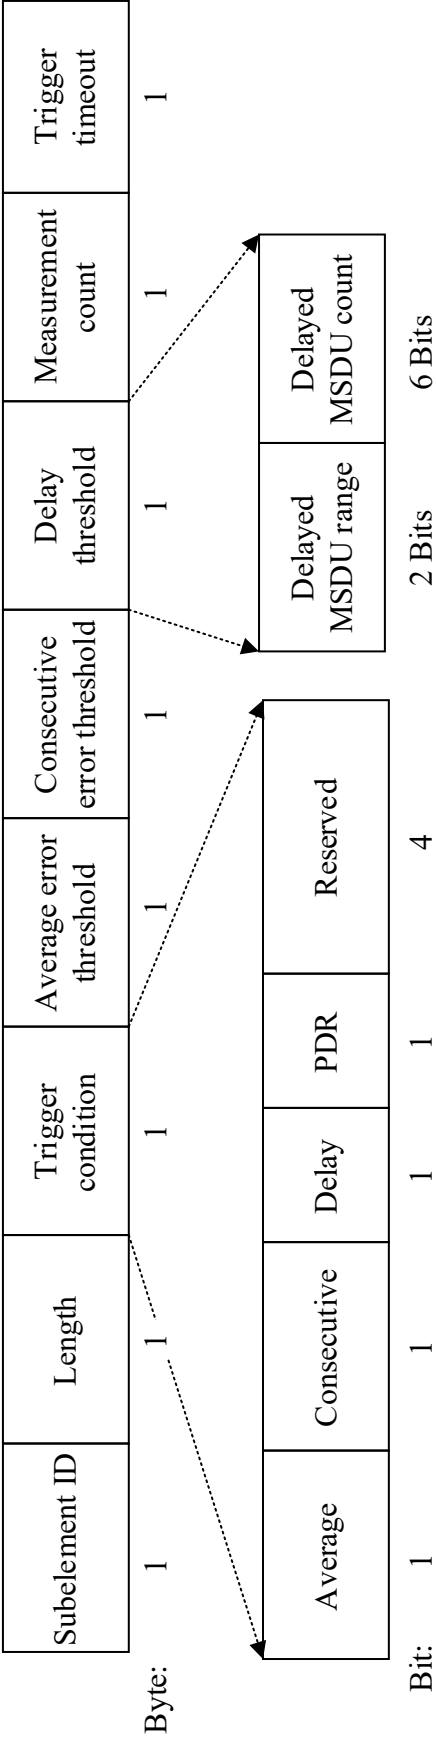


FIG. 21

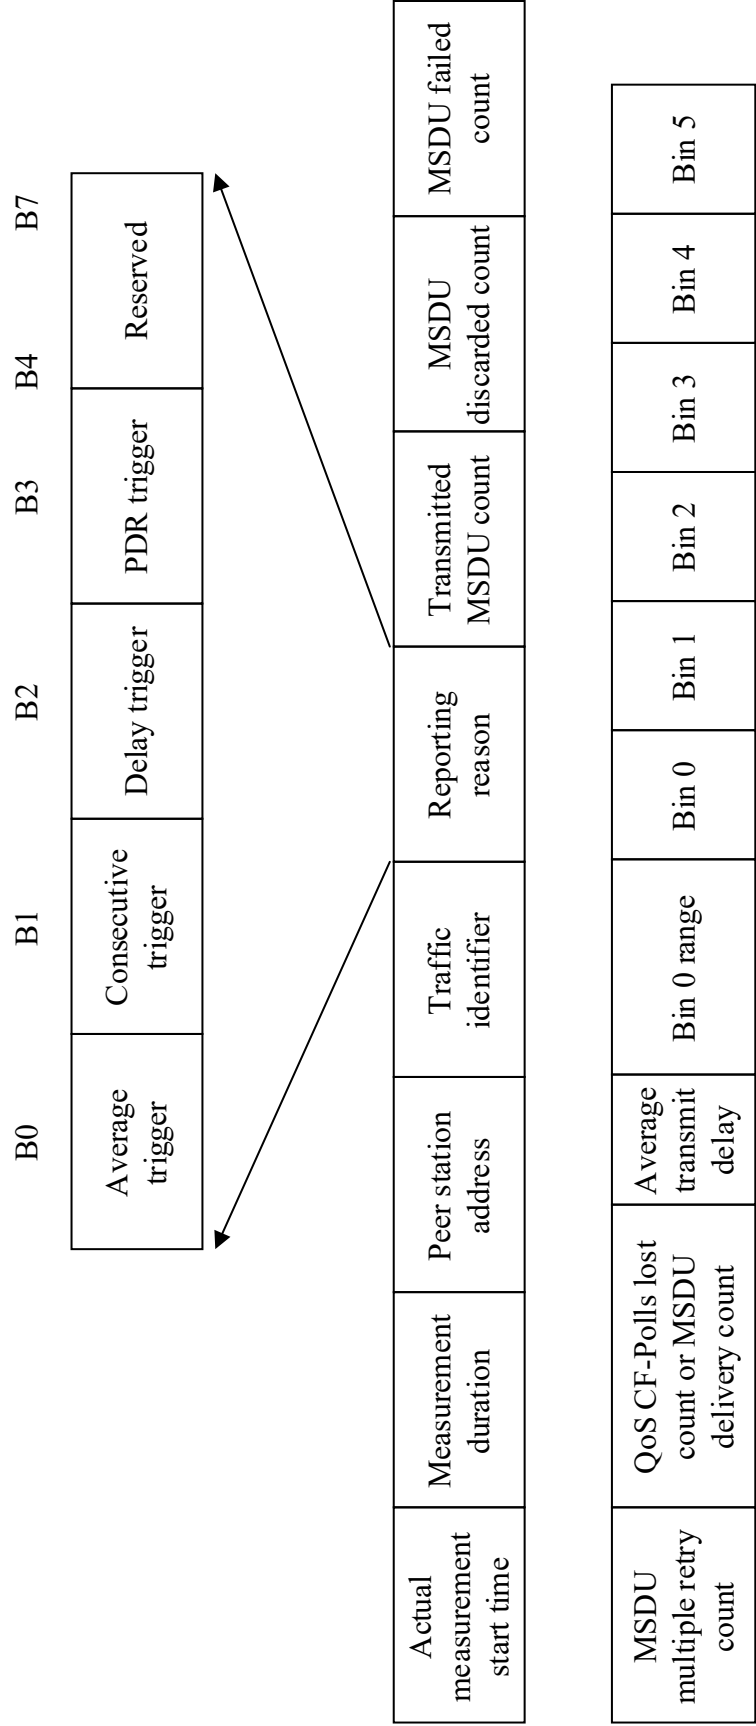


FIG. 22

Subelement ID	Length	Link bitmap	Transmitted MSDU/MPDU count list	MSDU/MPDU lost count list
---------------	--------	-------------	--	------------------------------

FIG. 23

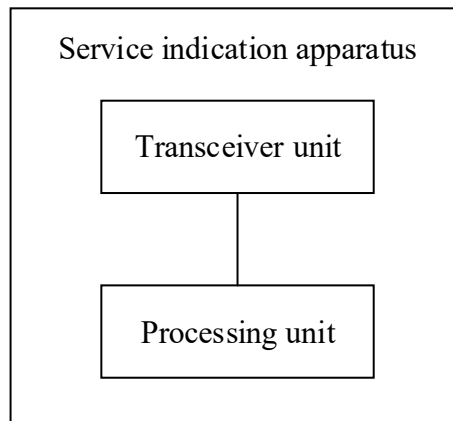


FIG. 24

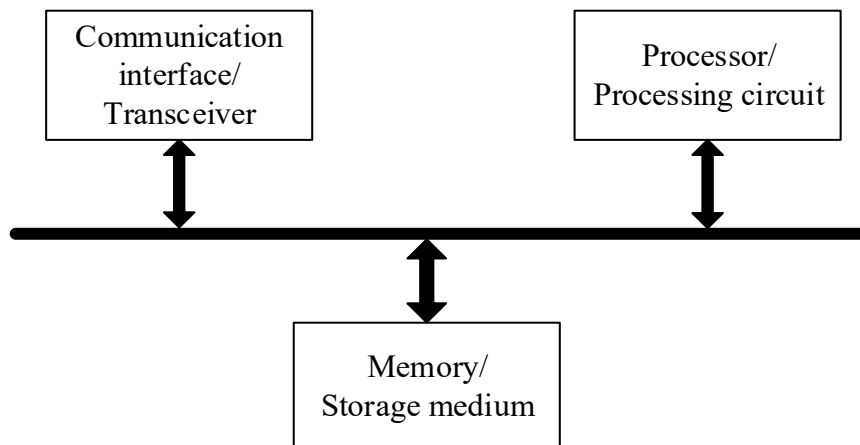


FIG. 25

Category	Robust action	Dialog token	Stream classification service descriptor list
----------	---------------	--------------	--

FIG. 26

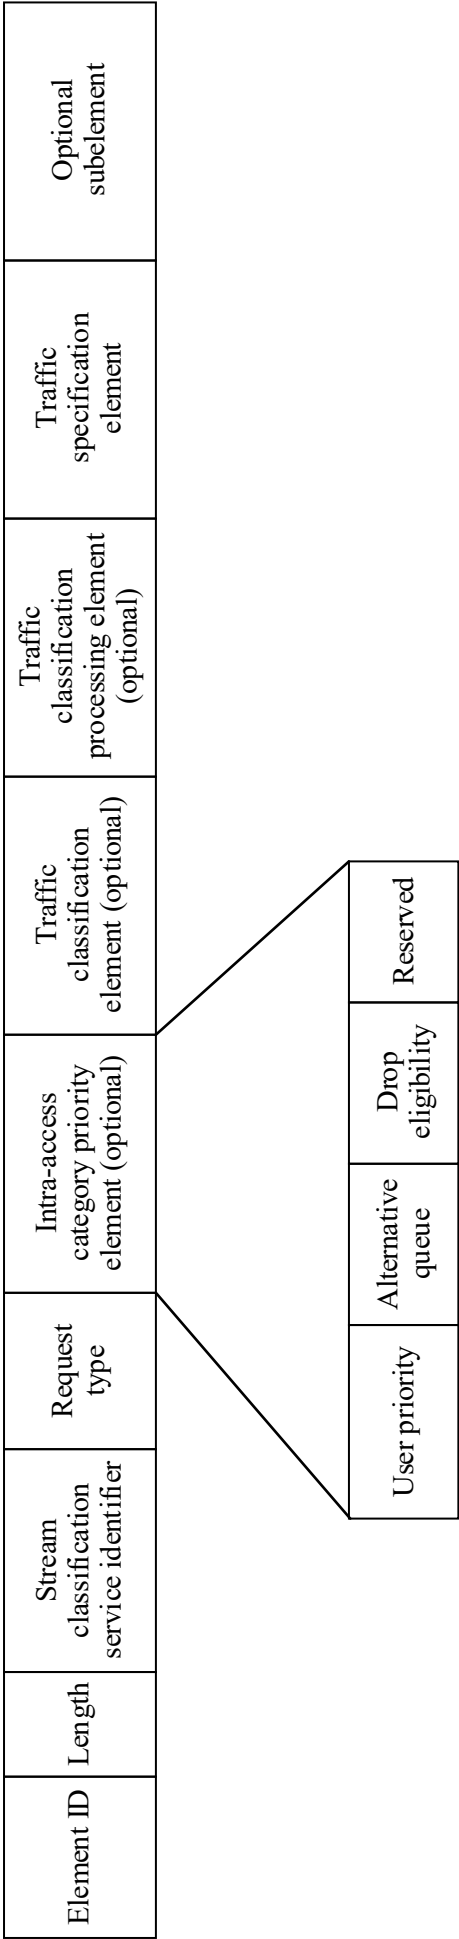


FIG. 27



FIG. 28

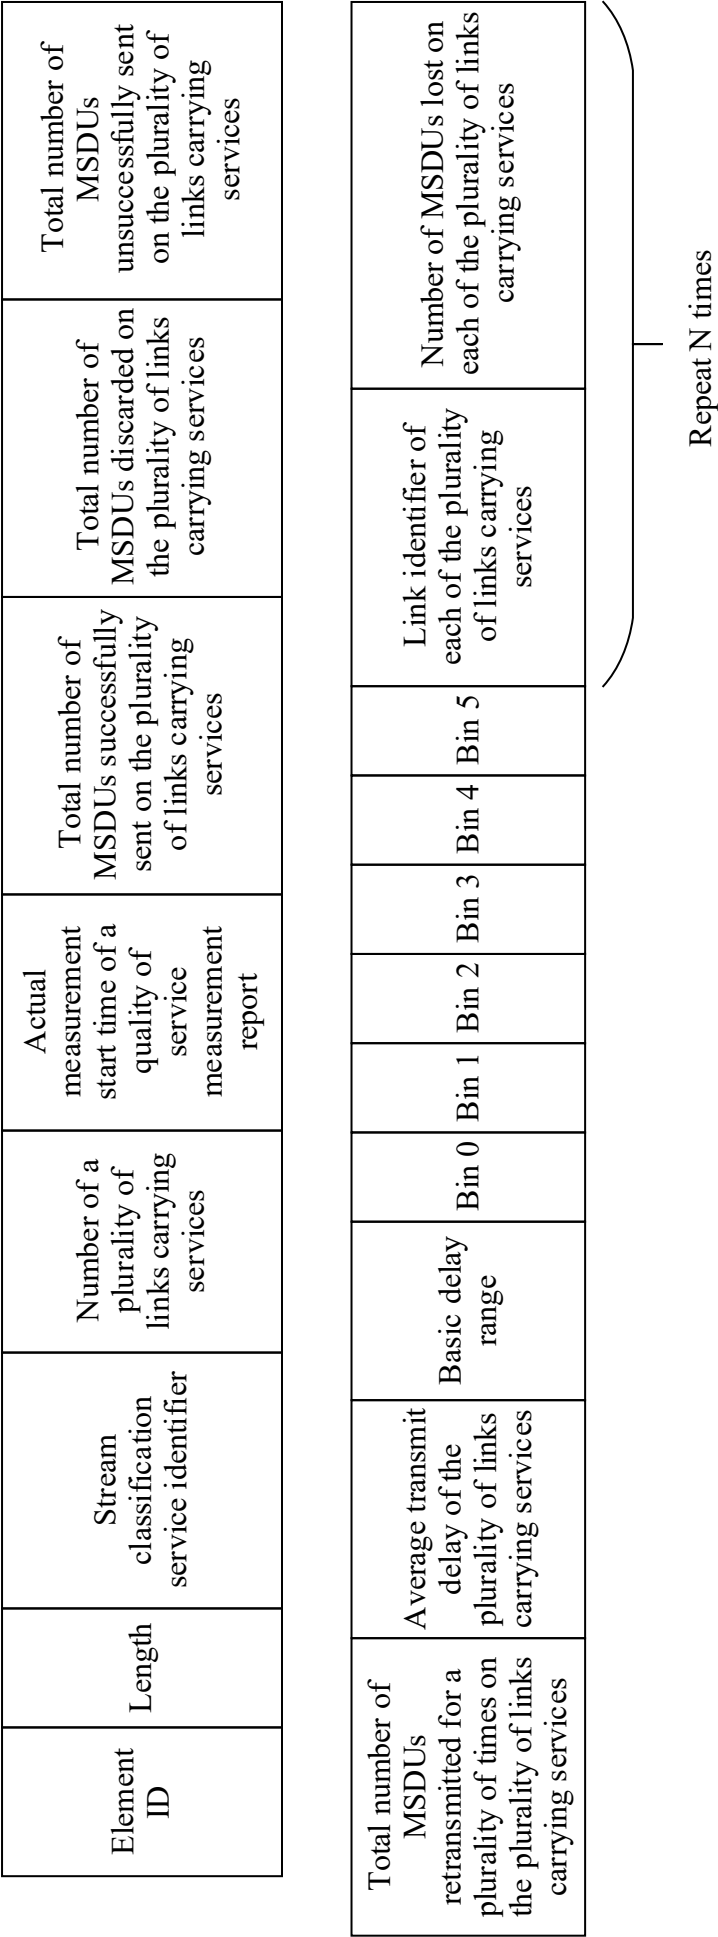


FIG. 29

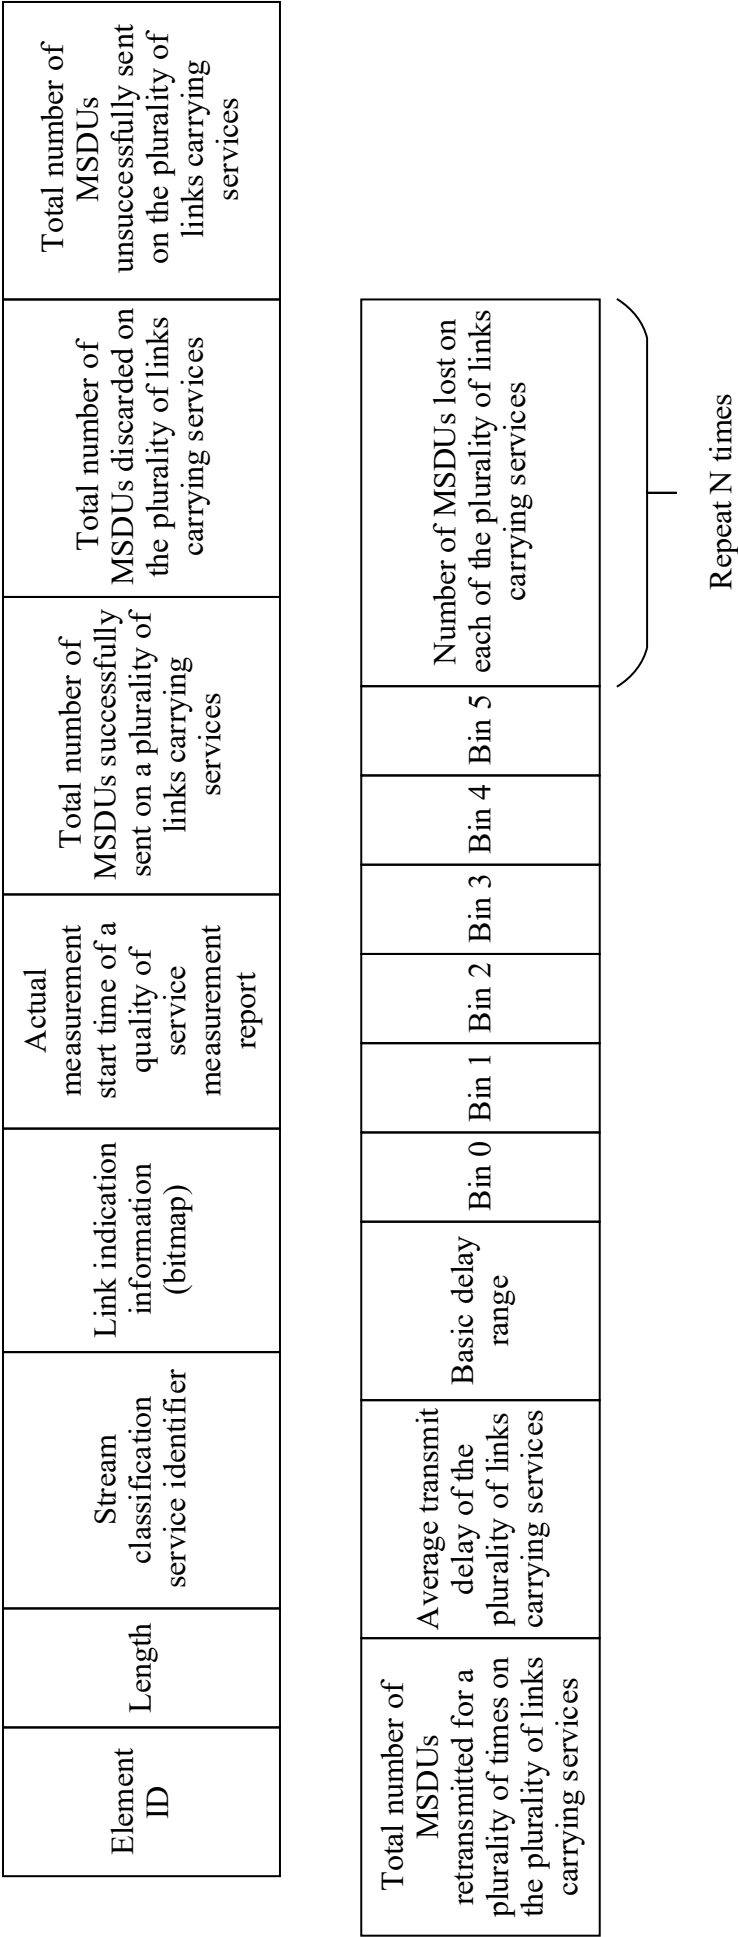


FIG. 30