



162162





27



G00002

ABSTRACT

The present invention provides a liquid-crystalline polyester resin, essentially consisting of the repeating units represented by formulae [I]-[IV]:

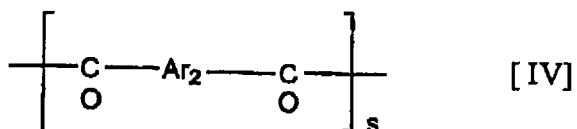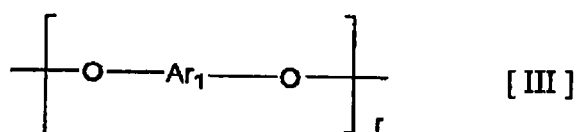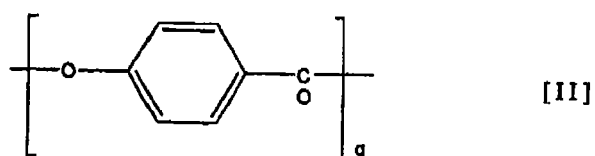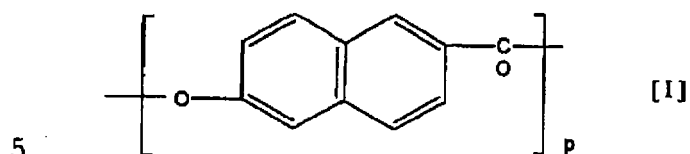

wherein p, q, r and s satisfy the following formulae: 0.4
 10 $\leq p/q \leq 2.0$, $2 \leq r \leq 15$, $2 \leq s \leq 15$, and $p+q+r+s = 100$,
 provided that the liquid-crystalline polyester resin has a
 melting point of 190-250°C determined by differential
 scanning calorimetry.

15 The liquid-crystalline polyester resin of the
 present invention exhibits a good molding processability at
 low temperatures and excellent mechanical properties.