

(19) World Intellectual Property Organization
International Bureau



G00002



(43) International Publication Date
31 October 2002 (31.10.2002)

PCT

(10) International Publication Number
WO 02/086615 A1

(51) International Patent Classification⁷: **G02F 1/313**

(21) International Application Number: PCT/US02/13064

(22) International Filing Date: 23 April 2002 (23.04.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/844,170 25 April 2001 (25.04.2001) US

(71) Applicant: **RAYTHEON COMPANY** [US/US]; 141
Spring Street, Lexington, MA 02421 (US).

(72) Inventors: **KLOCEK, Paul**; 16909 Old Pond Drive, Dal-
las, TX 75248 (US). **FLORENCE, James, M.**; 4803 Stony
Ford Drive, Dallas, TX 75287 (US).

(74) Agents: **SCHUBERT, William, C.** et al.; Corporate Coun-
sel-Patent Law, Raytheon Company, 2000 East El Segundo
Boulevard, PO BOX 902, El Segundo, CA 90245-0902
(US).

(81) Designated States (*national*): CN, KR, SG.

(84) Designated States (*regional*): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE, TR).


Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.



162162

(54) Title: METHOD AND APPARATUS FOR SWITCHING OPTICAL SIGNALS WITH A PHOTON BAND GAP DEVICE

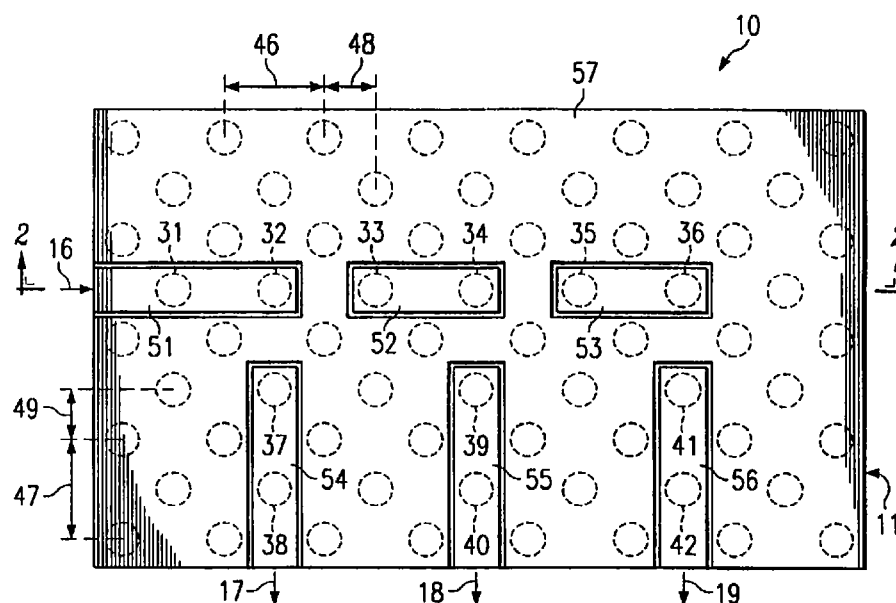

(57) **Abstract:** An optical switch (11, 111, 211) includes a member (26) having a plurality of openings (31-42) therethrough which are arranged in a periodic pattern. A path (86-87, 91-92, 96-97) extends through the member from an input to an output, with a subset of the openings disposed along the path. In one operational mode, each of the openings contains a material having an index of refraction which is different from the index of refraction of the member, so as to define a photon band gap configuration that inhibits propagation through the member of radiation at a predetermined wavelength. In a different operational mode, the index of refraction of the subset of openings along the path has a different value, which permits radiation to propagate along the path.

WO 02/086615 A1