



(51) International Patent Classification:
E21B 33/06 (2006.01)

[GB/SG]; 33 Jurong West St 41, #09-54 The Lakeshore, Singapore 649413 (SG).

(21) International Application Number:
PCT/GB2011/050737

(74) Agent: **FORRESTER**s; Chamberlain House, Paradise Place, Birmingham, West Midlands B3 3HP (GB).

(22) International Filing Date:
13 April 2011 (13.04.2011)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/323,814 13 April 2010 (13.04.2010) US
1104885.7 23 March 2011 (23.03.2011) GB

(71) Applicant (for all designated States except US): **MANAGED PRESSURE OPERATIONS PTE. LIMITED** [SG/SG]; 1 Maritime Square, #12-04A, Harbour Front Centre, Singapore 099253 (SG).


(72) Inventors; and

(75) Inventors/Applicants (for US only): **LEUCHTENBERG, Christian** [DE/SG]; Apt 06#103, Block 42A, Caribbean Apartments, Keppel Bay Drive, Singapore 098656 (SG). **MACGREGOR, Alexander John**

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: BLOWOUT PREVENTER ASSEMBLY

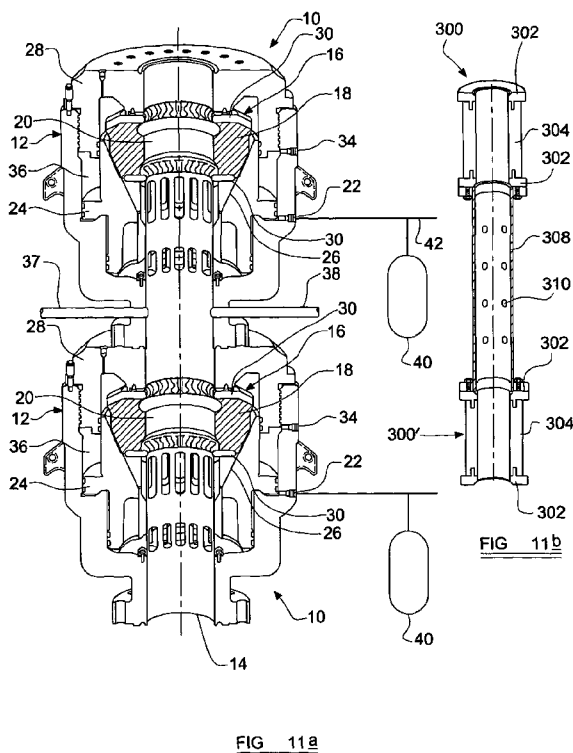

(57) Abstract: A blowout preventer assembly comprising an annular blowout preventer having an annular packing unit and an actuator operable to reduce the internal diameter of the annular packing unit, wherein the assembly further comprises a stripping sleeve having a tubular elastomeric sleeve which in use is positioned generally centrally of the packing unit so that the packing unit surrounds at least a portion of the elastomeric sleeve.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, —
GW, ML, MR, NE, SN, TD, TG).

*before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*